

**SECTION 00 0110
TABLE OF CONTENTS**

PROCUREMENT AND CONTRACTING REQUIREMENTS

DIVISION 00 -- PROCUREMENT AND CONTRACTING REQUIREMENTS

- A. 00 0110 - Table of Contents
- B. 00 3100 - Available Project Information
- C. 00 4325 - Substitution Request Form - During Procurement
- D. 00 6325 - Substitution Request Form - During Construction

SPECIFICATIONS

DIVISION 01 -- GENERAL REQUIREMENTS

- A. 01 1000 - Summary
- B. 01 2000 - Price and Payment Procedures
- C. 01 2100 - Allowances
- D. 01 2300 - Alternates
- E. 01 2500 - Substitution Procedures
- F. 01 3000 - Administrative Requirements
- G. 01 4000 - Quality Requirements
- H. 01 4216 - Definitions
- I. 01 4219 - Reference Standards
- J. 01 5000 - Temporary Facilities and Controls
- K. 01 5213 - Field Offices and Sheds
- L. 01 6000 - Product Requirements
- M. 01 6116 - Volatile Organic Compound (VOC) Content Restrictions
- N. 01 7000 - Execution and Closeout Requirements
- O. 01 7419 - Construction Waste Management and Disposal
- P. 01 7800 - Closeout Submittals
- Q. 01 9113 - General Commissioning Requirements

DIVISION 02 -- EXISTING CONDITIONS (NOT USED)

- A. 02 4100 - Demolition

DIVISION 03 -- CONCRETE

- A. 03 4500 - Precast Architectural Concrete

DIVISION 04 -- MASONRY

- A. 04 7300 - Manufactured Stone Masonry


DIVISION 05 -- METALS (NOT USED)

DIVISION 06 -- WOOD, PLASTICS, AND COMPOSITES

- A. 06 1000 - Rough Carpentry

DIVISION 07 -- THERMAL AND MOISTURE PROTECTION

- A. 07 1300 - Vapor Barrier
- B. 07 2100 - Thermal Insulation
- C. 07 2500 - Weather Barriers
- D. 07 4213 - Metal Wall Panels - MBCI

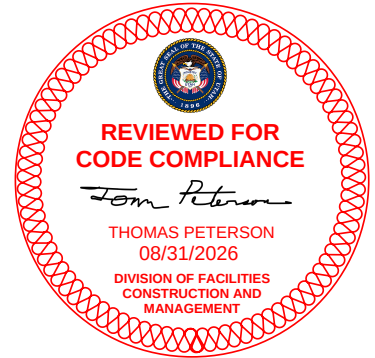

- E. 07 6200 - Sheet Metal Flashing and Trim

DIVISION 08 -- OPENINGS

- A. 08 1113 - Hollow Metal Frames
- B. 08 1416 - Flush Wood Doors
- C. 08 3100 - Access Doors and Panels
- D. 08 5400 - Composite Windows
- E. 08 7100 - Door Hardware
- F. 08 8000 - Glazing

DIVISION 09 -- FINISHES

- A. 09 0561 - Common Work Results for Flooring Preparation
- B. 09 2116 - Gypsum Board Assemblies
- C. 09 3000 - Tiling
- D. 09 6500 - Resilient Flooring
- E. 09 6813 - Tile Carpeting
- F. 09 9123 - Interior Painting

DIVISION 10 -- SPECIALTIES (NOT USED)

DIVISION 11 -- EQUIPMENT (NOT USED)

DIVISION 12 -- FURNISHINGS (NOT USED)

DIVISION 13 -- SPECIAL CONSTRUCTION (NOT USED)

DIVISION 14 -- CONVEYING EQUIPMENT (NOT USED)

DIVISION 21 -- FIRE SUPPRESSION (NOT USED)

DIVISION 22 -- PLUMBING (NOT USED)

DIVISION 23 -- HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC) (NOT USED)

DIVISION 25 -- INTEGRATED AUTOMATION (NOT USED)

DIVISION 26 -- ELECTRICAL

- A. 26 0519 - Low-Voltage Electrical Power Conductors and Cables
- B. 26 0526 - Grounding and Bonding
- C. 26 0529 - Hangers and Supports for Electrical Systems
- D. 26 0533 - Raceways and Boxes for Electrical Systems
- E. 26 0544 - Sleeves and Sleeve Seals for Electrical Raceways and Cabling
- F. 26 0548 - Vibration and Seismic Controls for Electrical Systems
- G. 26 0553 - Identification for Electrical Systems
- H. 26 2726 - Wiring Devices
- I. 26 2816 - Enclosed Switches and Circuit Breakers
- J. 26 5100 - Interior Lighting

DIVISION 27 -- COMMUNICATIONS (NOT USED)
DIVISION 28 -- ELECTRONIC SAFETY AND SECURITY (NOT USED)
DIVISION 31 -- EARTHWORK (NOT USED)
DIVISION 32 -- EXTERIOR IMPROVEMENTS (NOT USED)
DIVISION 33 -- UTILITIES (NOT USED)
DIVISION 34 -- TRANSPORTATION (NOT USED)
DIVISION 40 -- PROCESS INTEGRATION (NOT USED)
END OF SECTION

This page intentionally left blank

**SECTION 00 3100
AVAILABLE PROJECT INFORMATION**

PART 1 GENERAL

1.01 EXISTING CONDITIONS

- A. Certain information relating to existing surface and subsurface conditions and structures is available to bidders but will not be part of Contract Documents, as follows:
- B. Geotechnical Report: Entitled Geotechnical Investigation for the proposed Gossner Foods Retail Chalet and Learning Lodge, dated May 15, 2026.
 - 1. Original copy is attached at the end of this section .
 - 2. This report identifies properties of below grade conditions and offers recommendations for the design of foundations, prepared primarily for the use of Architect.
 - 3. This report, by its nature, cannot reveal all conditions that exist on the site. Should subsurface conditions be found to vary substantially from this report, changes in the design and construction of foundations will be made, with resulting credits or expenditures to the Contract Price accruing to Owner.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

Gossner Foods

SECTION 00 4325
SUBSTITUTION REQUEST FORM - DURING PROCUREMENT
SEE ATTACHED DOCUMENT
END OF SECTION

This page intentionally left blank

Gossner Foods

SECTION 00 6325
SUBSTITUTION REQUEST FORM - DURING CONSTRUCTION
SEE ATTACHED FORM
END OF SECTION

This page intentionally left blank

**SECTION 01 1000
SUMMARY**

PART 1 GENERAL

1.01 PROJECT

- A. Project Name: 826333 - DFCM Hardware Ranch Refresh
- B. Owner's Name: Gossner Foods
- C. Architect's Name: Design West Architects.
- D. The Project consists of the construction of a new retail location with a learning and interactive experiential component in the building.

1.02 OWNER OCCUPANCY

- A. Owner intends to occupy the Project upon Substantial Completion.
- B. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- C. Schedule the Work to accommodate Owner occupancy.

1.03 CONTRACTOR USE OF SITE AND PREMISES

- A. Provide access to and from site as required by law and by Owner:
 - 1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
 - 2. Do not obstruct roadways, sidewalks, or other public ways without permit.
- B. Utility Outages and Shutdown:
 - 1. Prevent accidental disruption of utility services to other facilities.

1.04 WORK SEQUENCE

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 2000
PRICE AND PAYMENT PROCEDURES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Change procedures.
- C. Correlation of CMGC Contractor submittals based on changes.

1.02 SCHEDULE OF VALUES

- A. Use Schedule of Values Form: AIA G703, edition stipulated in the Agreement.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit draft to Architect for approval.
- C. Forms filled out by hand will not be accepted.

1.03 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Use Form AIA G702 and Form AIA G703, edition stipulated in the Agreement.
- C. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to Architect for approval.
- D. Forms filled out by hand will not be accepted.
- E. Execute certification by signature of authorized officer.
- F. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of work performed and for stored products.
- G. List each authorized Change Order as a separate line item, listing Change Order number and dollar amount as for an original item of work.
- H. Submit one electronic and three hard-copies of each Application for Payment.

1.04 MODIFICATION PROCEDURES

- A. Submit name of the individual authorized to receive change documents and who will be responsible for informing others in CMGC Contractor 's employ or subcontractors of changes to Contract Documents.
- B. For minor changes not involving an adjustment to the Contract Sum or Contract Time, Architect will issue instructions directly to CMGC Contractor .
- C. For other required changes, Architect will issue a document signed by Owner instructing CMGC Contractor to proceed with the change, for subsequent inclusion in a Change Order.
 - 1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
 - 2. Promptly execute the change.
- D. For changes for which advance pricing is desired, Architect will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. CMGC Contractor shall prepare and submit a fixed price quotation within 5 days.
- E. CMGC Contractor may propose a change by submitting a request for change to Architect, describing the proposed change and its full effect on the work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation. Document any requested substitutions in accordance with Section 01 6000.

- F. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
- G. Substantiation of Costs: Provide full information required for evaluation.
 - 1. On request, provide the following data:
 - a. Quantities of products, labor, and equipment.
 - b. Taxes, insurance, and bonds.
 - c. Overhead and profit.
 - d. Justification for any change in Contract Time.
 - e. Credit for deletions from Contract, similarly documented.
 - 2. Support each claim for additional costs with additional information:
 - 3. For Time and Material work, submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract.
- H. Execution of Change Orders: Architect will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- I. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- J. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust times for other items of work affected by the change, and resubmit.
- K. Promptly enter changes in Project Record Documents.

1.05 APPLICATION FOR FINAL PAYMENT

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

**SECTION 01 2100
ALLOWANCES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Contingency allowance.
- B. Inspecting and testing allowances.

1.02 RELATED REQUIREMENTS

- A. Section 01 2000 - Price and Payment Procedures: Additional payment and modification procedures.

1.03 CONTINGENCY ALLOWANCE

- A. Funds will be drawn from the Contingency Allowance only by approved Proposal Request or Change Order.
- B. At closeout of Contract, funds remaining in Contingency Allowance and the overhead and profit on the contingency from the CMGC will be credited to Owner by Change Order.

1.04 INSPECTING AND TESTING ALLOWANCES

1.05 ALLOWANCES SCHEDULE

- A. Contingency Allowance: Include the stipulated sum/price of 5% of GMP for use upon Owner's instructions.
- B. Inspecting and Testing Allowance: Include the sum of \$_____ for payment of inspecting services specified in Section 01 4000 - Quality Requirements.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 2300
ALTERNATES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Description of Alternates.

1.02 RELATED REQUIREMENTS

- A. Document 00 2113 - Instructions to Bidders: Instructions for preparation of pricing for Alternates.

1.03 SCHEDULE OF APPROVED MATERIAL ALTERNATES

- A. Alternate No. 1 -
 - 1. Basis of Design: Fluid-applied weather barrier on specified sheathing - see section 07 2500
 - 2. Alternate Item: Factory applied integral weather barrier on sheathing (Zip System Wall Sheathing or equal).

PART 2 PRODUCTS

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 2500
SUBSTITUTION PROCEDURES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedural requirements for proposed substitutions.

1.02 DEFINITIONS

- A. Substitutions: Changes from Contract Documents requirements proposed by CMGC Contractor to materials, products, assemblies, and equipment.
 - 1. Substitutions for Cause: Proposed due to changed Project circumstances beyond CMGC Contractor 's control.
 - a. Unavailability.
 - b. Regulatory changes.
 - 2. Substitutions for Convenience: Proposed due to possibility of offering substantial advantage to the Project only will be considered during bidding.
 - a. Substitution requests offering advantages solely to the CMGC Contractor will not be considered.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 GENERAL REQUIREMENTS

- A. A Substitution Request for products, assemblies, materials, and equipment constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product, equipment, assembly, or system.
 - 2. Agrees to provide the same warranty for the substitution as for the specified product.
 - 3. Agrees to provide same or equivalent maintenance service and source of replacement parts, as applicable.
 - 4. Agrees to coordinate installation and make changes to other work that may be required for the work to be complete, with no additional cost to Owner.
 - 5. Waives claims for additional costs or time extension that may subsequently become apparent.
 - 6. Agrees to reimburse Owner and Architect for review or redesign services associated with re-approval by authorities.
- B. A Substitution Request for specified installer constitutes a representation that the submitter:
 - 1. Has acted in good faith to obtain services of specified installer, but was unable to come to commercial, or other terms.
- C. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents. Burden of proof is on proposer.
- D. Content: Include information necessary for tracking the status of each Substitution Request, and information necessary to provide an actionable response.
 - 1. Forms indicated in the Project Manual must be used. Information below that is not included in the form should be provided in addition to the form:
 - a. Project Information:
 - 1) Official project name and number, and any additional required identifiers established in Contract Documents.
 - (a) Owner's, Architect's, and Contractor 's names.
 - 2) Substitution Request Information:
 - (a) Discrete and consecutive Substitution Request number, and descriptive subject/title.
 - (b) Indication of whether the substitution is for cause or convenience. Issue date.

- (c) Reference to particular Contract Document(s) specification section number, title, and article/paragraph(s).
 - (d) Description of Substitution.
 - (e) Reason why the specified item cannot be provided.
 - (f) Differences between proposed substitution and specified item.
 - (g) Description of how proposed substitution affects other parts of work.[_____].
 - 3) Attached Comparative Data: Provide point-by-point, side-by-side comparison addressing essential attributes specified, as appropriate and relevant for the item:
 - (a) Physical characteristics.
 - (b) In-service performance.
 - (c) Expected durability.
 - (d) Visual effect.
 - (e) Warranties.
 - (f) Other salient features and requirements.
 - (g) Include, as appropriate or requested, the following types of documentation:
 - (1) Product Data: Samples, Certificates, test, reports or similar qualification data.
 - (2) Drawings, when required to show impact on adjacent construction elements.[_____].
 - (3) Impact of Substitution:
 - (4) Savings to Owner for accepting substitution.
 - (5) Change to Contract Time due to accepting substitution.
2. No specific form is required. CMGC Contractor 's Substitution Request documentation must include the following:
- a. Project Information:
 - 1) Official project name and number, and any additional required identifiers established in Contract Documents.
 - b. Substitution Request Information:
 - 1) Discrete and consecutive Substitution Request number, and descriptive subject/title.
 - 2) Indication of whether the substitution is for cause or convenience.
 - 3) Issue date.
 - 4) Description of Substitution.
 - 5) Reason why the specified item cannot be provided.
 - 6) Differences between proposed substitution and specified item.
 - 7) Description of how proposed substitution affects other parts of work.
 - c. Attached Comparative Data: Provide point-by-point, side-by-side comparison addressing essential attributes specified, as appropriate and relevant for the item:
 - 1) Physical characteristics.
 - 2) In-service performance.
 - 3) Expected durability.
 - 4) Visual effect.
 - 5) Warranties.
 - 6) Other salient features and requirements.
 - 7) Include, as appropriate or requested, the following types of documentation:
 - (a) Product Data:
 - (b) Samples.
 - (c) Certificates, test, reports or similar qualification data.
 - d. Impact of Substitution:
 - 1) Savings to Owner for accepting substitution.
 - 2) Change to Contract Time due to accepting substitution.

E. Limit each request to a single proposed substitution item.

1. Submit an electronic document, combining the request form with supporting data into single document.

3.02 SUBSTITUTION PROCEDURES DURING PROCUREMENT

- A. Submittal Time Restrictions:
 1. Submit request for Substitution for Convenience immediately upon discovery of its potential advantage to the project, but not later than [7] days prior to time required for review and approval by Architect, in order to stay on approved bidding schedule.

3.03 SUBSTITUTION PROCEDURES DURING CONSTRUCTION

- A. Architect will consider requests for substitutions only within 15 days after date of Agreement.
- B. Submit request for Substitution for Cause within 14 days of discovery of need for substitution, but not later than 7 days prior to time required for review and approval by Architect, in order to stay on approved project schedule.
- C. Submit request for Substitution for Convenience are not permitted during construction.
- D. Substitutions will not be considered under one or more of the following circumstances:
 1. When they are indicated or implied on shop drawing or product data submittals, without having received prior approval.
 2. Without a separate written request during the bidding period.
- E. Failure to order product in a timely manner to meet project timeline requirements, does not constitute justification for a substitution. Any additional costs incurred related to obtaining the specified product in a expedited manner, as a result of this failure, will not be approved in Change Orders and are the responsibility of the ordering party.

3.04 RESOLUTION

- A. Architect may request additional information and documentation prior to rendering a decision. Provide this data in an expeditious manner.
- B. Architect will notify CMGC Contractor in writing of decision to accept or reject request.
 1. Architect's decision following review of proposed substitution will be noted on the submitted form.

3.05 ACCEPTANCE

- A. Accepted substitutions change the work of the Project. They will be documented and incorporated into work of the project by Change Order, Construction Change Directive, Architectural Supplementary Instructions, or similar instruments provided for in the Conditions of the Contract.

3.06 CLOSEOUT ACTIVITIES

- A. See Section 01 7800 - Closeout Submittals, for closeout submittals.

END OF SECTION

This page intentionally left blank

**SECTION 01 3000
ADMINISTRATIVE REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General administrative requirements.
- B. Electronic document submittal service.
- C. Preconstruction meeting.
- D. Site mobilization meeting.
- E. Progress meetings.
- F. Progress photographs.
- G. Coordination drawings.
- H. Submittals for review, information, and project closeout.
- I. Number of copies of submittals.
- J. Requests for Interpretation (RFI) procedures.
- K. Submittal procedures.

1.02 GENERAL ADMINISTRATIVE REQUIREMENTS

- A. Comply with requirements of Section 01 7000 - Execution and Closeout Requirements for coordination of execution of administrative tasks with timing of construction activities.
- B. Make the following types of submittals to Architect:
 - 1. Requests for Interpretation (RFI).
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.
 - 5. Manufacturer's instructions and field reports.
 - 6. Applications for payment and change order requests.
 - 7. Progress schedules.
 - 8. Coordination drawings.
 - 9. Correction Punch List and Final Correction Punch List for Substantial Completion.
 - 10. Closeout submittals.

1.03 PROJECT COORDINATOR

- A. Project Coordinator: Construction Manager.
- B. Cooperate with the Project Coordinator in allocation of mobilization areas of site; for field offices and sheds, for access, traffic, and parking facilities.
- C. During construction, coordinate use of site and facilities through the Project Coordinator.
- D. Comply with Project Coordinator's procedures for intra-project communications; submittals, reports and records, schedules, coordination drawings, and recommendations; and resolution of ambiguities and conflicts.
- E. Comply with instructions of the Project Coordinator for use of temporary utilities and construction facilities. Responsibility for providing temporary utilities and construction facilities is identified in Section 01 1000 - Summary.
- F. Coordinate field engineering and layout work under instructions of the Project Coordinator.
- G. Make the following types of submittals to Architect through the Project Coordinator:
 - 1. Requests for Interpretation.
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.

5. Design data.
6. Manufacturer's instructions and field reports.
7. Applications for payment and change order requests.
8. Progress schedules.
9. Coordination drawings.
10. Correction Punch List and Final Correction Punch List for Substantial Completion.
11. Closeout submittals.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 ELECTRONIC DOCUMENT SUBMITTAL SERVICE

- A. All documents transmitted for purposes of administration of the contract are to be in electronic (PDF) format, as appropriate to the document, and transmitted via an Internet-based submittal service that receives, logs and stores documents, provides electronic stamping and signatures, and notifies addressees via email.
 1. Besides submittals for review, information, and closeout, this procedure applies to Requests for Interpretation (RFIs), progress documentation, contract modification documents (e.g. supplementary instructions, change proposals, change orders), applications for payment, field reports and meeting minutes, CMGC Contractor's correction punchlist, and any other document any participant wishes to make part of the project record.
 2. CMGC Contractor and Architect are required to use this service.
 3. It is CMGC Contractor's responsibility to submit documents in allowable format.
 4. Subcontractors, suppliers, and Architect's consultants will be permitted to use the service at no extra charge.
 5. Users of the service need an email address, internet access, and PDF review software that includes ability to mark up and apply electronic stamps (such as Adobe Acrobat, www.adobe.com, or Bluebeam PDF Revu, www.bluebeam.com), unless such software capability is provided by the service provider.
 6. Paper document transmittals will not be reviewed; emailed electronic documents will not be reviewed.
 7. All other specified submittal and document transmission procedures apply, except that electronic document requirements do not apply to samples or color selection charts.
- B. Submittal Service: The selected service is:
 1. Procore: www.procore.com.
- C. Training: One, one-hour, web-based training session will be arranged for all participants, with representatives of Architect and CMGC Contractor participating; further training is the responsibility of the user of the service.
- D. Project Closeout: Architect will determine when to terminate the service for the project and is responsible for obtaining archive copies of files for Owner.

3.02 PRECONSTRUCTION MEETING

- A. Project Coordinator will schedule a meeting after Notice to Proceed.
- B. Attendance Required:
 1. Owner.
 2. Architect.
 3. CMGC Contractor .
 4. Invited Sub-Contractors.
- C. Agenda:
 1. Submission of list of subcontractors, list of products, schedule of values, and progress schedule.
 2. Submission of initial Submittal schedule.

3. Designation of personnel representing the parties to Contract, None - N/A and <1|A/E|>.
 4. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
 5. Scheduling.
- D. Record minutes and distribute copies within four days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

3.03 SITE MOBILIZATION MEETING

- A. Project Coordinator will schedule meeting at the Project site prior to CMGC Contractor occupancy.
- B. Attendance Required:
1. CMGC Contractor .
 2. Architect.
 3. CMGC Contractor 's superintendent.
 4. Major subcontractors.
- C. Agenda:
1. Use of premises by Owner and CMGC Contractor .
 2. Owner's requirements.
 3. Construction facilities and controls provided by Owner.
 4. Temporary utilities provided by Owner.
 5. Survey and building layout.
 6. Security and housekeeping procedures.
 7. Schedules.
 8. Application for payment procedures.
 9. Procedures for testing.
 10. Procedures for maintaining record documents.
 11. Requirements for start-up of equipment.
 12. Inspection and acceptance of equipment put into service during construction period.
- D. Record minutes and distribute copies within four days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

3.04 PROGRESS MEETINGS

- A. Schedule and administer meetings throughout progress of the work at maximum weekly intervals.
- B. Make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.
- C. Attendance Required:
1. CMGC Contractor .
 2. Owner.
 3. Architect.
 4. CMGC Contractor 's superintendent.
 5. Major subcontractors.
- D. Agenda:
1. Review minutes of previous meetings.
 2. Review of work progress.
 3. Field observations, problems, and decisions.
 4. Identification of problems that impede, or will impede, planned progress.
 5. Review of submittals schedule and status of submittals.
 6. Review of RFIs log and status of responses.
 7. Maintenance of progress schedule.
 8. Corrective measures to regain projected schedules.

9. Planned progress during succeeding work period.
 10. Coordination of projected progress.
 11. Maintenance of quality and work standards.
 12. Effect of proposed changes on progress schedule and coordination.
 13. Other business relating to work.
- E. Record minutes and distribute copies within four days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

3.05 CONSTRUCTION PROGRESS SCHEDULE

- A. If preliminary schedule requires revision after review, submit revised schedule within 10 days.
- B. Within 20 days after review of preliminary schedule, submit draft of proposed complete schedule for review.
 1. Include written certification that major contractors have reviewed and accepted proposed schedule.
- C. Within 10 days after joint review, submit complete schedule.
- D. Submit updated schedule with each Application for Payment.

3.06 PROGRESS PHOTOGRAPHS

- A. Maintain one set of all photographs at project site for reference; same copies as submitted, identified as such.
- B. Photography Type: Digital; electronic files.
- C. Digital Photographs: 24 bit color, minimum resolution of 1024 by 768, in JPG format; provide files unaltered by photo editing software.
 1. Delivery Medium: Via email.
 2. File Naming: Include project identification, date and time of view, and view identification.
 3. PDF File: Assemble all photos into printable pages in PDF format, with 2 to 3 photos per page, each photo labeled with file name; one PDF file per submittal.

3.07 COORDINATION DRAWINGS

- A. Provide information required by Project Coordinator for preparation of coordination drawings.
- B. Review drawings prior to submission to Architect.

3.08 REQUESTS FOR INTERPRETATION(RFI)

- A. Definition: A request seeking one of the following:
 1. An interpretation, amplification, or clarification of some requirement of Contract Documents arising from inability to determine from them the exact material, process, or system to be installed; or when the elements of construction are required to occupy the same space (interference); or when an item of work is described differently at more than one place in Contract Documents.
 2. A resolution to an issue which has arisen due to field conditions and affects design intent.
- B. Whenever possible, request clarifications at the next appropriate project progress meeting, with response entered into meeting minutes, rendering unnecessary the issuance of a formal RFI.
- C. Preparation: Prepare an RFI immediately upon discovery of a need for interpretation of Contract Documents. Failure to submit a RFI in a timely manner is not a legitimate cause for claiming additional costs or delays in execution of the work.
 1. Prepare a separate RFI for each specific item.
 - a. Review, coordinate, and comment on requests originating with subcontractors and/or materials suppliers.
 - b. Do not forward requests which solely require internal coordination between subcontractors.
 2. Prepare using an electronic version of the form appended to this section.
 3. Prepare using software provided by the Electronic Document Submittal Service.

4. Combine RFI and its attachments into a single electronic file. PDF format is preferred.
- D. Reason for the RFI: Prior to initiation of an RFI, carefully study all Contract Documents to confirm that information sufficient for their interpretation is definitely not included.
- E. Content: Include identifiers necessary for tracking the status of each RFI, and information necessary to provide an actionable response.
 1. Official Project name and number, and any additional required identifiers established in Contract Documents.
 2. Owner's, Architect's, and CMGC Contractor 's names.
 3. Discrete and consecutive RFI number, and descriptive subject/title.
 4. Issue date, and requested reply date.
 5. Reference to particular Contract Document(s) requiring additional information/interpretation. Identify pertinent drawing and detail number and/or specification section number, title, and paragraph(s).
 6. Annotations: Field dimensions and/or description of conditions which have engendered the request.
 7. CMGC Contractor 's suggested resolution: A written and/or a graphic solution, to scale, is required in cases where clarification of coordination issues is involved, for example; routing, clearances, and/or specific locations of work shown diagrammatically in Contract Documents. If applicable, state the likely impact of the suggested resolution on Contract Time or the Contract Sum.
- F. Attachments: Include sketches, coordination drawings, descriptions, photos, submittals, and other information necessary to substantiate the reason for the request.
- G. RFI Log: Prepare and maintain a tabular log of RFIs for the duration of the project.
 1. Indicate current status of every RFI. Update log promptly and on a regular basis.
 2. Note dates of when each request is made, and when a response is received.
 3. Highlight items requiring priority or expedited response.
 4. Highlight items for which a timely response has not been received to date.
 5. Identify and include improper or frivolous RFIs.
- H. Review Time: Architect will respond and return RFIs to CMGC Contractor within seven calendar days of receipt. For the purpose of establishing the start of the mandated response period, RFIs received after 12:00 noon will be considered as having been received on the following regular working day.
 1. Response period may be shortened or lengthened for specific items, subject to mutual agreement, and recorded in a timely manner in progress meeting minutes.
- I. Responses: Content of answered RFIs will not constitute in any manner a directive or authorization to perform extra work or delay the project. If in CMGC Contractor 's belief it is likely to lead to a change to Contract Sum or Contract Time, promptly issue a notice to this effect, and follow up with an appropriate Change Order request to Owner.
 1. Response may include a request for additional information, in which case the original RFI will be deemed as having been answered, and an amended one is to be issued forthwith. Identify the amended RFI with an R suffix to the original number.
 2. Do not extend applicability of a response to specific item to encompass other similar conditions, unless specifically so noted in the response.
 3. Upon receipt of a response, promptly review and distribute it to all affected parties, and update the RFI Log.
 4. Notify Architect within seven calendar days if an additional or corrected response is required by submitting an amended version of the original RFI, identified as specified above.

3.09 SUBMITTAL SCHEDULE

- A. Submit to Architect for review a schedule for submittals in tabular format.

1. Format schedule to allow tracking of status of submittals throughout duration of construction.
2. Arrange information to include scheduled date for initial submittal, specification number and title, submittal category (for review or for information), description of item of work covered, and role and name of subcontractor.
3. Account for time required for preparation, review, manufacturing, fabrication and delivery when establishing submittal delivery and review deadline dates.
 - a. For assemblies, equipment, systems comprised of multiple components and/or requiring detailed coordination with other work, allow for additional time to make corrections or revisions to initial submittals, and time for their review.

3.10 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
 1. Product data.
 2. Shop drawings.
 3. Samples for selection.
 4. Samples for verification.
- B. Submit to Architect for review for the limited purpose of checking for compliance with information given and the design concept expressed in Contract Documents.
- C. Samples will be reviewed for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 01 7800 - Closeout Submittals.

3.11 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:
 1. Design data.
 2. Certificates.
 3. Test reports.
 4. Inspection reports.
 5. Manufacturer's instructions.
 6. Manufacturer's field reports.
 7. Other types indicated.
- B. Submit for Architect's knowledge as contract administrator or for Owner.

3.12 SUBMITTALS FOR PROJECT CLOSEOUT

- A. Submit Correction Punch List for Substantial Completion.
- B. Submit Final Correction Punch List for Substantial Completion.
- C. When the following are specified in individual sections, submit them at project closeout in compliance with requirements of Section 01 7800 - Closeout Submittals:
 1. Project record documents.
 2. Operation and maintenance data.
 3. Warranties.
 4. Bonds.
- D. Submit for Owner's benefit during and after project completion.

3.13 NUMBER OF COPIES OF SUBMITTALS

- A. Electronic Documents: Submit one electronic copy in PDF format; an electronically-marked up file will be returned. Create PDFs at native size and right-side up; illegible files will be rejected.
- B. Samples: Submit the number specified in individual specification sections; one of which will be retained by Architect.
 1. After review, produce duplicates.

2. Retained samples will not be returned to CMGC Contractor unless specifically so stated.

3.14 SUBMITTAL PROCEDURES

- A. General Requirements:
 1. Submit separate packages of submittals for review and submittals for information, when included in the same specification section.
 2. Sequentially identify each item. For revised submittals use original number and a sequential combination numerical and alphabetical suffix.
 3. Identify: Project; CMGC Contractor ; subcontractor or supplier; pertinent drawing and detail number; and specification section number and article/paragraph, as appropriate on each copy.
 4. Apply CMGC Contractor 's stamp, signed or initialed certifying that review, approval, verification of products required, field dimensions, adjacent construction work, and coordination of information is in accordance with the requirements of the work and Contract Documents.
 - a. Submittals from sources other than the CMGC Contractor , or without CMGC Contractor 's stamp will not be acknowledged, reviewed, or returned.
 5. Deliver each submittal on date noted in submittal schedule, unless an earlier date has been agreed to by all affected parties, and is of the benefit to the project.
 - a. Upload submittals in electronic form to Electronic Document Submittal Service website.
 6. Schedule submittals to expedite the Project, and coordinate submission of related items.
 - a. For each submittal for review, allow 15 days excluding delivery time to and from the CMGC Contractor .
 - b. For sequential reviews involving Architect's consultants, Owner, or another affected party, allow an additional 7 days.
 7. Identify variations from Contract Documents and product or system limitations that may be detrimental to successful performance of the completed work.
 8. Provide space for CMGC Contractor and Architect review stamps.
 9. When revised for resubmission, identify all changes made since previous submission.
 10. Incomplete submittals will not be reviewed, unless they are partial submittals for distinct portion(s) of the work, and have received prior approval for their use.
 11. Submittals not requested will be recognized, and will be returned "Not Reviewed",
- B. Product Data Procedures:
 1. Submit only information required by individual specification sections.
 2. Collect required information into a single submittal.
 3. Submit concurrently with related shop drawing submittal.
 4. Do not submit (Material) Safety Data Sheets for materials or products.
- C. Shop Drawing Procedures:
 1. Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting Contract Documents and coordinating related work.
 2. Generic, non-project-specific information submitted as shop drawings do not meet the requirements for shop drawings.
- D. Samples Procedures:
 1. Transmit related items together as single package.
 2. Identify each item to allow review for applicability in relation to shop drawings showing installation locations.

3.15 SUBMITTAL REVIEW

- A. Submittals for Review: Architect will review each submittal, and approve, or take other appropriate action.
- B. Submittals for Information: Architect will acknowledge receipt and review. See below for actions to be taken.

- C. Architect's actions will be reflected by marking each returned submittal using virtual stamp on electronic submittals.
- D. Architect's and consultants' actions on items submitted for review:
 - 1. Authorizing purchasing, fabrication, delivery, and installation:
 - a. "Approved as Noted, Resubmission not required", or language with same legal meaning.
 - 1) At CMGC Contractor 's option, submit corrected item, with review notations acknowledged and incorporated.
 - b. "Approved as Noted, Resubmit for Record", or language with same legal meaning.
 - 2. Not Authorizing fabrication, delivery, and installation:
 - a. "Revise and Resubmit".
 - 1) Resubmit revised item, with review notations acknowledged and incorporated.
 - b. "Rejected".
 - 1) Submit item complying with requirements of Contract Documents.
- E. Architect's and consultants' actions on items submitted for information:
 - 1. Items for which no action was taken:
 - a. "Received" - to notify the CMGC Contractor that the submittal has been received for record only.
 - 2. Items for which action was taken:
 - a. "Reviewed" - no further action is required from CMGC Contractor .

END OF SECTION

**SECTION 01 4000
QUALITY REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Submittals.
- B. Quality assurance.
- C. References and standards.
- D. Testing and inspection agencies and services.
- E. Control of installation.
- F. Mock-ups.
- G. Tolerances.
- H. Manufacturers' field services.
- I. Defect Assessment.

1.02 RELATED REQUIREMENTS

- A. Section 01 2100 - Allowances: Allowance for payment of testing services.
- B. Section 01 3000 - Administrative Requirements: Submittal procedures.
- C. Section 01 4216 - Definitions.

1.03 REFERENCE STANDARDS

- A. ASTM C1077 - Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation; 2026.
- B. ASTM C1093 - Standard Practice for Accreditation of Testing Agencies for Masonry; 2025.
- C. ASTM D3740 - Standard Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction; 2023.
- D. ASTM E329 - Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection; 2025b.
- E. ASTM E543 - Standard Specification for Agencies Performing Nondestructive Testing; 2026.
- F. IAS AC89 - Accreditation Criteria for Testing Laboratories; 2025.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Design Data: Submit for Architect's knowledge as contract administrator for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents, or for Owner's information.
- C. Test Reports: After each test/inspection, promptly submit two copies of report to Architect and to CMGC Contractor .
 - 1. Include:
 - a. Date issued.
 - b. Project title and number.
 - c. Name of inspector.
 - d. Date and time of sampling or inspection.
 - e. Identification of product and specifications section.
 - f. Location in the Project.
 - g. Type of test/inspection.
 - h. Date of test/inspection.
 - i. Results of test/inspection.
 - j. Compliance with Contract Documents.

- k. When requested by Architect, provide interpretation of results.
- 2. Test report submittals are for Architect's knowledge as contract administrator for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents, or for Owner's information.
- D. Certificates: When specified in individual specification sections, submit certification by the manufacturer and CMGC Contractor or installation/application subcontractor to Architect, in quantities specified for Product Data.
 - 1. Indicate material or product complies with or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
 - 2. Certificates may be recent or previous test results on material or product, but must be acceptable to Architect.
- E. Manufacturer's Instructions: When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, start-up, adjusting, and finishing, for the Owner's information. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.
- F. Manufacturer's Field Reports: Submit reports for Architect's benefit as contract administrator or for Owner.
 - 1. Submit report in duplicate within 30 days of observation to Architect for information.
 - 2. Submit for information for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents.

1.05 QUALITY ASSURANCE

- A. Testing Agency Qualifications:
 - 1. Prior to start of work, submit agency name, address, and telephone number, and names of full time registered Engineer and responsible officer.
 - 2. Qualification Statement: Provide documentation showing testing laboratory is accredited under IAS AC89.

1.06 REFERENCES AND STANDARDS

- A. For products and workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Comply with reference standard of date of issue current on date of Contract Documents, except where a specific date is established by applicable code.
- C. Obtain copies of standards where required by product specification sections.
- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- E. Should specified reference standards conflict with Contract Documents, request clarification from Architect before proceeding.
- F. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of Architect shall be altered from Contract Documents by mention or inference otherwise in any reference document.

1.07 TESTING AND INSPECTION AGENCIES AND SERVICES

- A. Owner will employ services of an independent testing agency to perform certain specified testing and inspection; payment for cost of services will be derived from allowance specified in Section 01 2100; see Section 01 2100 and applicable sections for description of services included in allowance.
- B. Owner will employ and pay for services of an independent testing agency to perform other specified testing.

- C. CMGC Contractor shall employ and pay for services of an independent testing agency to perform other specified testing.
- D. As indicated in individual specification sections, Owner or CMGC Contractor shall employ and pay for services of an independent testing agency to perform other specified testing.
- E. Employment of agency in no way relieves CMGC Contractor of obligation to perform Work in accordance with requirements of Contract Documents.
- F. CMGC Contractor Employed Agency:
 - 1. Laboratory: Authorized to operate in Utah.
 - 2. Laboratory Staff: Maintain a full time registered Engineer on staff to review services.
 - 3. Testing Equipment: Calibrated at reasonable intervals either by NIST or using an NIST established Measurement Assurance Program, under a laboratory measurement quality assurance program.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect before proceeding.
- D. Comply with specified standards as minimum quality for the work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

3.02 MOCK-UPS

- A. Accepted mock-ups establish the standard of quality the Architect will use to judge the Work.
- B. Notify Architect and None - N/A Consultant fifteen (15) working days in advance of dates and times when mock-ups will be constructed.
- C. Tests shall be performed under provisions identified in this section and identified in the respective product specification sections.
- D. Assemble and erect specified items with specified attachment and anchorage devices, flashings, seals, and finishes.
- E. Architect will use accepted mock-ups as a comparison standard for the remaining Work.
- F. Where mock-up has been accepted by Architect and is specified in product specification sections to be removed, protect mock-up throughout construction, remove mock-up and clear area when directed to do so by Architect.

3.03 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

3.04 TESTING AND INSPECTION

- A. Testing Agency Duties:
 - 1. Provide qualified personnel at site. Cooperate with Architect and CMGC Contractor in performance of services.
 - 2. Perform specified sampling and testing of products in accordance with specified standards.
 - 3. Ascertain compliance of materials and mixes with requirements of Contract Documents.
 - 4. Perform additional tests and inspections required by Architect.
 - 5. Submit reports of all tests/inspections specified.
- B. Limits on Testing/Inspection Agency Authority:
 - 1. Agency may not release, revoke, alter, or enlarge on requirements of Contract Documents.
 - 2. Agency may not approve or accept any portion of the Work.
 - 3. Agency may not assume any duties of CMGC Contractor .
 - 4. Agency has no authority to stop the Work.
- C. CMGC Contractor Responsibilities:
 - 1. Deliver to agency at designated location, adequate samples of materials proposed to be used that require testing, along with proposed mix designs.
 - 2. Cooperate with laboratory personnel, and provide access to the Work and to manufacturers' facilities.
 - 3. Provide incidental labor and facilities:
 - a. To provide access to Work to be tested/inspected.
 - b. To obtain and handle samples at the site or at source of Products to be tested/inspected.
 - c. To facilitate tests/inspections.
 - d. To provide storage and curing of test samples.
 - 4. Notify Architect and laboratory 24 hours prior to expected time for operations requiring testing/inspection services.
 - 5. Employ services of an independent qualified testing laboratory and pay for additional samples, tests, and inspections required by CMGC Contractor beyond specified requirements.
 - 6. Arrange with Owner's agency and pay for additional samples, tests, and inspections required by CMGC Contractor beyond specified requirements.
- D. Re-testing required because of non-compliance with specified requirements shall be performed by the same agency on instructions by Architect.
- E. Re-testing required because of non-compliance with specified requirements shall be paid for by CMGC Contractor .

3.05 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, start-up of equipment, test, adjust, and balance equipment as applicable, and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.

3.06 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not complying with specified requirements.
- B. If, in the opinion of Owner, it is not practical to remove and replace the work, Owner will direct an appropriate remedy or adjust payment.

END OF SECTION

**SECTION 01 4216
DEFINITIONS**

PART 1 GENERAL

1.01 SUMMARY

- A. This section supplements the definitions contained in the General Conditions.
- B. Other definitions are included in individual specification sections.

1.02 DEFINITIONS

- A. Furnish: To supply, deliver, unload, and inspect for damage.
- B. Install: To unpack, assemble, erect, apply, place, finish, cure, protect, clean, start up, and make ready for use.
- C. Product: Material, machinery, components, equipment, fixtures, and systems forming the work result. Not materials or equipment used for preparation, fabrication, conveying, or erection and not incorporated into the work result. Products may be new, never before used, or re-used materials or equipment.
- D. Project Manual: The book-sized volume that includes the procurement requirements (if any), the contracting requirements, and the specifications.
- E. Provide: To furnish and install.
- F. Supply: Same as Furnish.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 4219
REFERENCE STANDARDS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Requirements relating to referenced standards.
- B. Reference standards full title and edition date.

1.02 QUALITY ASSURANCE

- A. For products or workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Should specified reference standards conflict with Contract Documents, request clarification from the Architect before proceeding.
- C. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of the Architect shall be altered by Contract Documents by mention or inference otherwise in any reference document.

PART 2 CONSTRUCTION INDUSTRY ORGANIZATION DOCUMENTS

2.01 ASTM A SERIES -- ASTM INTERNATIONAL

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.

2.02 ASTM D SERIES -- ASTM INTERNATIONAL

- A. ASTM D1227 - Standard Specification for Emulsified Asphalt Used as a Protective Coating for Roofing; 2013.
- B. ASTM D3322 - Standard Practice for Testing Primers and Primer Surfacer Over Preformed Metal; 2023.
- C. ASTM D3575 - Standard Test Methods for Flexible Cellular Materials Made from Olefin Polymers; 2020.
- D. ASTM D4956 - Standard Specification for Retroreflective Sheeting for Traffic Control; 2019.
- E. ASTM D6531 - Standard Test Method for Relative Tinting Strength of Aqueous Ink Systems by Instrumental Measurement; 2024.

2.03 ASTM E SERIES -- ASTM INTERNATIONAL

- A. ASTM E814 - Standard Test Method for Fire Tests of Penetration Firestop Systems; 2024.

2.04 ASTM G SERIES -- ASTM INTERNATIONAL

2.05 AWC -- AMERICAN WOOD COUNCIL

2.06 CRSI -- CONCRETE REINFORCING STEEL INSTITUTE

2.07 GA -- GYPSUM ASSOCIATION

- A. GA-201 - Using Gypsum Board for Walls & Ceilings; 1990.
- B. GA-214 - Levels of Finish for Gypsum Panel Products; 2021.

2.08 GANA -- GLASS ASSOCIATION OF NORTH AMERICA

- A. GANA (GM) - GANA Glazing Manual; 2022.
- B. GANA (SM) - GANA Sealant Manual; 2008.

2.09 ICC -- INTERNATIONAL CODE COUNCIL, INC.

- A. ICC (IBC) - International Building Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- B. ICC (IECC) - International Energy Conservation Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

- C. ICC (IFC) - International Fire Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- D. ICC (IMC) - International Mechanical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- E. ICC (IPC) - International Plumbing Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

2.10 NFRC -- NATIONAL FENESTRATION RATING COUNCIL, INC.

- A. NFRC (CPD) - Certified Product Directory - National Fenestration Rating Council; Current Edition.
- B. NFRC 100 - Procedure for Determining Fenestration Product U-factors; 2023.
- C. NFRC 200 - Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence; 2023.
- D. NFRC 400 - Procedure for Determining Fenestration Product Air Leakage; 2023.

2.11 PCI -- PRECAST/PRESTRESSED CONCRETE INSTITUTE

2.12 SMACNA -- SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION, INC.

2.13 TCNA -- TILE COUNCIL OF NORTH AMERICA, INC.

2.14 TMS -- THE MASONRY SOCIETY

- A. TMS 402/602 - Building Code Requirements and Specification for Masonry Structures; 2022, with Errata (2024).

2.15 TPI -- TURFGRASS PRODUCERS INTERNATIONAL

- A. TPI (SPEC) - Guideline Specifications to Turfgrass Sodding; 2006.

PART 3 UNITED STATES GOVERNMENT AND RELATED AGENCIES DOCUMENTS

3.01 COE -- CORPS OF ENGINEERS, U.S. ARMY

END OF SECTION

This page intentionally left blank

**SECTION 01 5000
TEMPORARY FACILITIES AND CONTROLS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary utilities.
- B. Temporary telecommunications services.
- C. Temporary sanitary facilities.
- D. Temporary Controls: Barriers, enclosures, and fencing.
- E. Security requirements.
- F. Waste removal facilities and services.
- G. Project identification sign.

1.02 TEMPORARY UTILITIES

- A. Owner will provide the following:
 - 1. Electrical power, consisting of connection to existing facilities.
 - 2. Water supply, consisting of connection to existing facilities.
- B. Provide and pay for all electrical power, lighting, and water required for construction purposes.
- C. Existing facilities with power at the scoreboard be used.
- D. Use trigger-operated nozzles for water hoses, to avoid waste of water.

1.03 TELECOMMUNICATIONS SERVICES

- A. Provide, maintain, and pay for telecommunications services to field office at time of project mobilization.

1.04 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.
- B. Use of existing facilities located at the job site is not permitted.
- C. Maintain daily in clean and sanitary condition.

1.05 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Provide protection for plants designated to remain. Replace damaged plants.
- D. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.
- E. Traffic Controls: Provide during regular school hours and other school events.

1.06 FENCING

- A. Construction: CMGC Contractor's option.
- B. Provide 6 foot high fence around construction site; equip with vehicular and pedestrian gates with locks.

1.07 EXTERIOR ENCLOSURES

- A. Provide temporary insulated weather tight closure of exterior openings to accommodate acceptable working conditions and protection for Products, to allow for temporary heating and maintenance of required ambient temperatures identified in individual specification sections,

and to prevent entry of unauthorized persons. Provide access doors with self-closing hardware and locks.

1.08 INTERIOR ENCLOSURES

- A. Provide temporary partitions and ceilings as indicated to separate work areas from Owner-occupied areas, to prevent penetration of dust and moisture into Owner-occupied areas, and to prevent damage to existing materials and equipment.
- B. Construction: Framing and reinforced polyethylene sheet materials with closed joints and sealed edges at intersections with existing surfaces:

1.09 SECURITY

- A. Provide security and facilities to protect Work, existing facilities, and Owner's operations from unauthorized entry, vandalism, or theft.

1.10 VEHICULAR ACCESS AND PARKING

- A. Coordinate access and haul routes with governing authorities and Owner.
- B. Provide and maintain access to fire hydrants, free of obstructions.
- C. Provide means of removing mud from vehicle wheels before entering streets.
- D. Provide temporary parking areas to accommodate construction personnel. When site space is not adequate, provide additional off-site parking.

1.11 WASTE REMOVAL

- A. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- B. Provide containers with lids. Remove trash from site periodically.
- C. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- D. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.12 PROJECT IDENTIFICATION

- A. Provide project identification sign of design and construction indicated on drawings.
- B. Erect on site at location indicated.
- C. No other signs are allowed without Owner permission except those required by law.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

**SECTION 01 5213
FIELD OFFICES AND SHEDS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary field offices for use of CMGC Contractor .

1.02 RELATED REQUIREMENTS

1.03 USE OF EXISTING FACILITIES

1.04 USE OF PERMANENT FACILITIES

- A. When permanent facilities are enclosed with operable utilities, relocate offices into building, with written agreement of Owner, and remove temporary buildings.

PART 2 PRODUCTS

2.01 CONSTRUCTION

- A. Portable or mobile buildings, or buildings constructed with floors raised above ground, securely fixed to foundations, with steps and landings at entrance doors.
- B. Construction: Structurally sound, secure, weather tight enclosures for office. Maintain during progress of Work; remove when no longer needed.
- C. Fire Extinguishers: Appropriate type fire extinguisher at each office.

2.02 ENVIRONMENTAL CONTROL

- A. Heating, Cooling, and Ventilating: Automatic equipment to maintain comfort conditions.

2.03 CMGC CONTRACTOR OFFICE AND FACILITIES

- A. Size: For CMGC Contractor 's needs and to provide space for project meetings.
- B. Other Furnishings: CMGC Contractor 's option.
- C. Equipment: Six adjustable band protective helmets for visitors, one 10 inch outdoor weather thermometer .

PART 3 EXECUTION

3.01 PREPARATION

- A. Fill and grade sites for temporary structures to provide drainage away from buildings.

3.02 INSTALLATION

- A. Install office spaces ready for occupancy 15 days after date fixed in Notice to Proceed.

3.03 MAINTENANCE AND CLEANING

- A. Maintain approach walks free of mud, water, and snow.

3.04 REMOVAL

- A. At completion of Work remove buildings, foundations, utility services, and debris. Restore areas.

END OF SECTION

This page intentionally left blank

**SECTION 01 6000
PRODUCT REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General product requirements.
- B. Re-use of existing products.
- C. Transportation, handling, storage and protection.
- D. Product option requirements.
- E. Substitution limitations.
- F. Procedures for Owner-supplied products.
- G. Maintenance materials, including extra materials, spare parts, tools, and software.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Lists of products to be removed from existing building.
- B. Section 01 2500 - Substitution Procedures: Substitutions made during procurement and/or construction phases.
- C. Section 01 4000 - Quality Requirements: Product quality monitoring.
- D. Section 01 6116 - Volatile Organic Compound (VOC) Content Restrictions: Requirements for VOC-restricted product categories.
- E. Section 01 7419 - Construction Waste Management and Disposal: Waste disposal requirements potentially affecting product selection, packaging and substitutions.

1.03 SUBMITTALS

- A. Proposed Products List: Submit list of major products proposed for use, with name of manufacturer, trade name, and model number of each product.
 - 1. Submit within 15 days after date of Notice to Proceed.
 - 2. For products specified only by reference standards, list applicable reference standards.
- B. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- C. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- D. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
 - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

PART 2 PRODUCTS

2.01 EXISTING PRODUCTS

- A. Do not use materials and equipment removed from existing premises unless specifically required or permitted by Contract Documents.
- B. Unforeseen historic items encountered remain the property of the Owner; notify Owner promptly upon discovery; protect, remove, handle, and store as directed by Owner.
- C. Existing materials and equipment indicated to be removed, but not to be re-used, relocated, reinstalled, delivered to the Owner, or otherwise indicated as to remain the property of the Owner, become the property of the CMGC Contractor ; remove from site.

2.02 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by Contract Documents.
- B. Use of products having any of the following characteristics is not permitted:
 - 1. Containing lead, cadmium, or asbestos.
- C. Where other criteria are met, CMGC Contractor shall give preference to products that:
 - 1. If used on interior, have lower emissions, as defined in Section 01 6116.
 - 2. If wet-applied, have lower VOC content, as defined in Section 01 6116.
 - 3. Are extracted, harvested, and/or manufactured closer to the location of the project.
 - 4. Have longer documented life span under normal use.
 - 5. Result in less construction waste. See Section 01 7419

2.03 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, substitutions allowed as per each individual section upon approval during bidding process. Contractors may bid on approved manufacturer's products or substitutions approved during bidding; those that are approved in an addendum.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

2.04 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver and place in location as directed; obtain receipt prior to final payment.

PART 3 EXECUTION

3.01 SUBSTITUTION LIMITATIONS

- A. See Section 01 2500 - Substitution Procedures.

3.02 OWNER-SUPPLIED PRODUCTS

- A. Owner's Responsibilities:
 - 1. Arrange for and deliver Owner reviewed shop drawings, product data, and samples, to CMGC Contractor .
 - 2. Arrange and pay for product delivery to site.
 - 3. On delivery, inspect products jointly with CMGC Contractor .
 - 4. Submit claims for transportation damage and replace damaged, defective, or deficient items.
 - 5. Arrange for manufacturers' warranties, inspections, and service.
- B. CMGC Contractor 's Responsibilities:
 - 1. Review Owner reviewed shop drawings, product data, and samples.
 - 2. Receive and unload products at site; inspect for completeness or damage jointly with Owner.
 - 3. Handle, store, install and finish products.
 - 4. Repair or replace items damaged after receipt.

3.03 TRANSPORTATION AND HANDLING

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.

- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

3.04 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication. See Section 01 7419.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weathertight, climate-controlled enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- G. Comply with manufacturer's warranty conditions, if any.
- H. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- I. Prevent contact with material that may cause corrosion, discoloration, or staining.
- J. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- K. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

END OF SECTION

This page intentionally left blank

**SECTION 01 6116
VOLATILE ORGANIC COMPOUND (VOC) CONTENT RESTRICTIONS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Requirements for Indoor-Emissions-Restricted products.
- B. Requirements for VOC-Content-Restricted products.

1.02 RELATED REQUIREMENTS

- A. Section 01 3000 - Administrative Requirements: Submittal procedures.
- B. Section 01 6000 - Product Requirements: Fundamental product requirements, substitutions and product options, delivery, storage, and handling.

1.03 DEFINITIONS

- A. Indoor-Emissions-Restricted Products: All products in the following product categories, whether specified or not:
 - 1. Interior paints and coatings applied on site.
 - 2. Interior adhesives and sealants applied on site, including flooring adhesives.
 - 3. Flooring.
 - 4. Composite wood.
 - 5. Products making up wall and ceiling assemblies.
 - 6. Thermal and acoustical insulation.
- B. Interior of Building: Anywhere inside the exterior weather barrier.
- C. Adhesives: All gunnable, trowelable, liquid-applied, and aerosol adhesives, whether specified or not; including flooring adhesives, resilient base adhesives, and pipe jointing adhesives.
- D. Sealants: All gunnable, trowelable, and liquid-applied joint sealants and sealant primers, whether specified or not; including firestopping sealants and duct joint sealers.
- E. Inherently Non-Emitting Materials: Products composed wholly of minerals or metals, unless they include organic-based surface coatings, binders, or sealants; and specifically the following:
 - 1. Concrete.
 - 2. Clay brick.
 - 3. Metals that are plated, anodized, or powder-coated.
 - 4. Glass.
 - 5. Ceramics.
 - 6. Solid wood flooring that is unfinished and untreated.

1.04 REFERENCE STANDARDS

1.05 UTAH ADMINISTRATIVE CODE - R307 ENVIROMENTAL QUALITY, AIR QUALITY; RULE R307-357. CONSUMER PRODUCTS.

1.06 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: For each VOC-restricted product used in the project, submit evidence of compliance.

PART 2 PRODUCTS

2.01 MATERIALS

- A. All Products: Comply with the most stringent of federal, State, and local requirements, or these specifications.

PART 3 EXECUTION

3.01 FIELD QUALITY CONTROL

- A. Owner reserves the right to reject non-compliant products, whether installed or not, and require their removal and replacement with compliant products at no extra cost to Owner.
- B. Additional costs to restore indoor air quality due to installation of non-compliant products will be borne by CMGC Contractor .

END OF SECTION

**SECTION 01 7000
EXECUTION AND CLOSEOUT REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition, None - N/A.
- C. Pre-installation meetings.
- D. Cutting and patching.
- E. Surveying for laying out the work.
- F. Cleaning and protection.
- G. Starting of systems and equipment.
- H. Demonstration and instruction of Owner personnel.
- I. Closeout procedures, including CMGC Contractor 's Correction Punch List, except payment procedures.
- J. General requirements for maintenance service.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 01 5000 - Temporary Facilities and Controls: Temporary exterior enclosures.
- C. Section 01 5000 - Temporary Facilities and Controls: Temporary interior partitions.
- D. Section 01 7800 - Closeout Submittals: Project record documents, operation and maintenance data, warranties, and bonds.
- E. Section 02 4100 - Demolition: Demolition of whole structures and parts thereof; site utility demolition.
- F. Section 07 8400 - Firestopping.
- G. Individual Product Specification Sections:
 - 1. Advance notification to other sections of openings required in work of those sections.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2027.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Survey work: Submit name, address, and telephone number of Surveyor before starting survey work.
 - 1. On request, submit documentation verifying accuracy of survey work.
 - 2. Submit a copy of site drawing signed by the Land Surveyor, that the elevations and locations of the work are in compliance with Contract Documents.
 - 3. Submit surveys and survey logs for the project record.
- C. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
 - 1. Structural integrity of any element of Project.
 - 2. Integrity of weather exposed or moisture resistant element.
 - 3. Efficiency, maintenance, or safety of any operational element.
 - 4. Visual qualities of sight exposed elements.
 - 5. Work of Owner or separate Contractor.

- D. Project Record Documents: Accurately record actual locations of capped and active utilities.

1.05 QUALIFICATIONS

- A. For surveying work, employ a land surveyor registered in Utah and acceptable to Architect. Submit evidence of surveyor's Errors and Omissions insurance coverage in the form of an Insurance Certificate. Employ only individual(s) trained and experienced in collecting and recording accurate data relevant to ongoing construction activities,

1.06 PROJECT CONDITIONS

- A. Use of explosives is not permitted.
- B. Grade site to drain. Maintain excavations free of water. Provide, operate, and maintain pumping equipment.
- C. Protect site from puddling or running water. Provide water barriers as required to protect site from soil erosion.
- D. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- E. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
 - 1. Provide dust-proof enclosures to prevent entry of dust generated outdoors.
 - 2. Provide dust-proof barriers between construction areas and areas continuing to be occupied by Owner.
- F. Erosion and Sediment Control: Plan and execute work by methods to control surface drainage from cuts and fills, from borrow and waste disposal areas. Prevent erosion and sedimentation.
- G. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
 - 1. Outdoors: Limit conduct of especially noisy exterior work to the hours of 8 am to 5 pm.
 - 2. Indoors: Limit conduct of especially noisy interior work to the hours of 6 pm to 7 am.
- H. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.

1.07 COORDINATION

- A. See Section 01 1000 for occupancy-related requirements.
- B. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- C. Notify affected utility companies and comply with their requirements.
- D. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- E. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on drawings. Follow routing indicated for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- F. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- G. Coordinate completion and clean-up of work of separate sections.
- H. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

PART 2 PRODUCTS

2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 6000 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

3.03 PREINSTALLATION MEETINGS

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect four days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
 - 1. Review conditions of examination, preparation and installation procedures.
 - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect, Owner, participants, and those affected by decisions made.

3.04 LAYING OUT THE WORK

- A. Verify locations of survey control points prior to starting work.
- B. Promptly notify Architect of any discrepancies discovered.
- C. CMGC Contractor shall locate and protect survey control and reference points.
- D. Protect survey control points prior to starting site work; preserve permanent reference points during construction.

- E. Promptly report to Architect the loss or destruction of any reference point or relocation required because of changes in grades or other reasons.
- F. Replace dislocated survey control points based on original survey control. Make no changes without prior written notice to Architect.
- G. Utilize recognized engineering survey practices.
- H. Establish elevations, lines and levels. Locate and lay out by instrumentation and similar appropriate means:
 - 1. Grid or axis for structures.
 - 2. Building foundation, column locations, ground floor elevations.
- I. Periodically verify layouts by same means.
- J. Maintain a complete and accurate log of control and survey work as it progresses.

3.05 GENERAL INSTALLATION REQUIREMENTS

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

3.06 ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as indicated.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Keep areas in which alterations are being conducted separated from other areas that are still occupied.
 - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 01 5000 in locations indicated on drawings.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
 - 1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction specified.
 - 2. Remove items indicated on drawings.
 - 3. Relocate items indicated on drawings.
 - 4. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
 - 5. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove, relocate, and extend existing systems to accommodate new construction.

1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
 2. Where existing systems or equipment are not active and Contract Documents require reactivation, put back into operational condition; repair supply, distribution, and equipment as required.
 3. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - a. Disable existing systems only to make switchovers and connections; minimize duration of outages.
 - b. Provide temporary connections as required to maintain existing systems in service.
 4. Verify that abandoned services serve only abandoned facilities.
 5. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- F. Protect existing work to remain.
1. Prevent movement of structure; provide shoring and bracing if necessary.
 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 3. Repair adjacent construction and finishes damaged during removal work.
- G. Adapt existing work to fit new work: Make as neat and smooth transition as possible.
1. When existing finished surfaces are cut so that a smooth transition with new work is not possible, terminate existing surface along a straight line at a natural line of division and make recommendation to Architect.
 2. Where removal of partitions or walls results in adjacent spaces becoming one, rework floors, walls, and ceilings to a smooth plane without breaks, steps, or bulkheads.
 3. Where a change of plane of 1/4 inch or more occurs in existing work, submit recommendation for providing a smooth transition for Architect review and request instructions.
 4. Trim existing wood doors as necessary to clear new floor finish. Refinish trim as required.
- H. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- I. Refinish existing surfaces as indicated:
1. Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes.
 2. If mechanical or electrical work is exposed accidentally during the work, re-cover and refinish to match.
- J. Clean existing systems and equipment.
- K. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- L. Do not begin new construction in alterations areas before demolition is complete.
- M. Comply with all other applicable requirements of this section.

3.07 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.
- C. Perform whatever cutting and patching is necessary to:
 1. Complete the work.

2. Fit products together to integrate with other work.
 3. Provide openings for penetration of mechanical, electrical, and other services.
 4. Match work that has been cut to adjacent work.
 5. Repair areas adjacent to cuts to required condition.
 6. Repair new work damaged by subsequent work.
 7. Remove samples of installed work for testing when requested.
 8. Remove and replace defective and non-complying work.
- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Employ skilled and experienced installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- F. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- G. Restore work with new products in accordance with requirements of Contract Documents.
- H. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- I. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material in accordance with Section 07 8400, to full thickness of the penetrated element.
- J. Patching:
1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
 2. Match color, texture, and appearance.
 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

3.08 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

3.09 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- F. Protect work from spilled liquids. If work is exposed to spilled liquids, immediately remove protective coverings, dry out work, and replace protective coverings.

- G. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- H. Remove protective coverings when no longer needed; reuse or recycle coverings if possible.

3.10 SYSTEM STARTUP

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Notify Architect and Owner seven days prior to start-up of each item.
- C. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.
- D. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- E. Verify that wiring and support components for equipment are complete and tested.
- F. Execute start-up under supervision of applicable CMGC Contractor personnel and manufacturer's representative in accordance with manufacturers' instructions.
- G. Submit a written report that equipment or system has been properly installed and is functioning correctly.

3.11 DEMONSTRATION AND INSTRUCTION

- A. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shutdown of each item of equipment at scheduled time, at equipment location.
- B. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- C. Provide a qualified person who is knowledgeable about the Project to perform demonstration and instruction of Owner's personnel.
- D. Utilize operation and maintenance manuals as basis for instruction. Review contents of manual with Owner's personnel in detail to explain all aspects of operation and maintenance.
- E. Prepare and insert additional data in operations and maintenance manuals when need for additional data becomes apparent during instruction.

3.12 ADJUSTING

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

3.13 FINAL CLEANING

- A. Use cleaning materials that are nonhazardous.
- B. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- C. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- D. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- E. Replace filters of operating equipment.
- F. Clean debris from roofs, gutters, downspouts, scuppers, overflow drains, area drains, and drainage systems.
- G. Clean site; sweep paved areas, rake clean landscaped surfaces.
- H. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

3.14 CLOSEOUT PROCEDURES

- A. Make submittals that are required by governing or other authorities.
- B. Accompany Project Coordinator on preliminary observation to determine items to be listed for completion or correction in the CMGC Contractor 's Correction Punch List for CMGC Contractor 's Notice of Substantial Completion.
- C. Notify Architect when work is considered ready for Architect's Substantial Completion observation.
- D. Conduct Substantial Completion observation and create Final Correction Punch List containing Architect's and CMGC Contractor 's comprehensive list of items identified to be completed or corrected and submit to Architect.
- E. Correct items of work listed in Final Correction Punch List and comply with requirements for access to Owner-occupied areas.
- F. Notify Architect when work is considered finally complete and ready for Architect's Substantial Completion final observation.
- G. Complete items of work determined by Architect listed in executed Certificate of Substantial Completion.

3.15 MAINTENANCE

- A. Provide service and maintenance of components indicated in specification sections.
- B. Maintenance Period: As indicated in specification sections or, if not indicated, not less than one year from the Date of Substantial Completion or the length of the specified warranty, whichever is longer.
- C. Examine system components at a frequency consistent with reliable operation. Clean, adjust, and lubricate as required.
- D. Include systematic examination, adjustment, and lubrication of components. Repair or replace parts whenever required. Use parts produced by the manufacturer of the original component.
- E. Maintenance service shall not be assigned or transferred to any agent or subcontractor without prior written consent of the Owner.

END OF SECTION

**SECTION 01 7419
CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL**

PART 1 GENERAL

1.01 WASTE MANAGEMENT REQUIREMENTS

- A. Owner requires that this project generate the least amount of trash and waste possible.
- B. Employ processes that ensure the generation of as little waste as possible due to error, poor planning, breakage, mishandling, contamination, or other factors.
- C. Minimize trash/waste disposal in landfills; reuse, salvage, or recycle as much waste as economically feasible.
- D. CMGC Contractor Reporting Responsibilities: Submit periodic Waste Disposal Reports; report landfill disposal, incineration, recycling, salvage, and reuse regardless of to whom the cost or savings accrues; use the same units of measure on required reports.
- E. Methods of trash/waste disposal that are not acceptable are:
 - 1. Burning on the project site.
 - 2. Burying on the project site.
 - 3. Dumping or burying on other property, public or private.
 - 4. Other illegal dumping or burying.
- F. Regulatory Requirements: CMGC Contractor is responsible for knowing and complying with regulatory requirements, including but not limited to Federal, state and local requirements, pertaining to legal disposal of all construction and demolition waste materials.

1.02 RELATED REQUIREMENTS

- A. Section 01 3000 - Administrative Requirements: Additional requirements for project meetings, reports, submittal procedures, and project documentation.
- B. Section 01 5000 - Temporary Facilities and Controls: Additional requirements related to trash/waste collection and removal facilities and services.
- C. Section 01 6000 - Product Requirements: Waste prevention requirements related to delivery, storage, and handling.
- D. Section 01 7000 - Execution and Closeout Requirements: Trash/waste prevention procedures related to demolition, cutting and patching, installation, protection, and cleaning.

1.03 DEFINITIONS

- A. Clean: Untreated and unpainted; not contaminated with oils, solvents, caulk, or the like.
- B. Construction and Demolition Waste: Solid wastes typically including building materials, packaging, trash, debris, and rubble resulting from construction, remodeling, repair and demolition operations.
- C. Hazardous: Exhibiting the characteristics of hazardous substances, i.e., ignitibility, corrosivity, toxicity or reactivity.
- D. Nonhazardous: Exhibiting none of the characteristics of hazardous substances, i.e., ignitibility, corrosivity, toxicity, or reactivity.
- E. Nontoxic: Neither immediately poisonous to humans nor poisonous after a long period of exposure.
- F. Recyclable: The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product for reuse by others.
- G. Recycle: To remove a waste material from the project site to another site for remanufacture into a new product for reuse by others.
- H. Recycling: The process of sorting, cleansing, treating and reconstituting solid waste and other discarded materials for the purpose of using the altered form. Recycling does not include burning, incinerating, or thermally destroying waste.

- I. Return: To give back reusable items or unused products to vendors for credit.
- J. Reuse: To reuse a construction waste material in some manner on the project site.
- K. Salvage: To remove a waste material from the project site to another site for resale or reuse by others.
- L. Sediment: Soil and other debris that has been eroded and transported by storm or well production run-off water.
- M. Source Separation: The act of keeping different types of waste materials separate beginning from the first time they become waste.
- N. Toxic: Poisonous to humans either immediately or after a long period of exposure.
- O. Trash: Any product or material unable to be reused, returned, recycled, or salvaged.
- P. Waste: Extra material or material that has reached the end of its useful life in its intended use. Waste includes salvageable, returnable, recyclable, and reusable material.

PART 2 PRODUCTS

2.01 N/A

PART 3 EXECUTION

3.01 WASTE MANAGEMENT PROCEDURES

- A. See Section 01 3000 for additional requirements for project meetings, reports, submittal procedures, and project documentation.
- B. See Section 01 5000 for additional requirements related to trash/waste collection and removal facilities and services.
- C. See Section 01 6000 for waste prevention requirements related to delivery, storage, and handling.
- D. See Section 01 7000 for trash/waste prevention procedures related to demolition, cutting and patching, installation, protection, and cleaning.

3.02 WASTE MANAGEMENT PLAN IMPLEMENTATION

- A. Manager: Designate an on-site person or persons responsible for instructing workers and overseeing and documenting results of the Waste Management Plan.
- B. Communication: Distribute copies of the Waste Management Plan to job site foreman, each subcontractor, Owner, and Architect.
- C. Instruction: Provide on-site instruction of appropriate separation, handling, and recycling, salvage, reuse, and return methods to be used by all parties at the appropriate stages of the project.
- D. Meetings: Discuss trash/waste management goals and issues at project meetings.
 - 1. Prebid meeting.
 - 2. Preconstruction meeting.
 - 3. Regular job-site meetings.
- E. Facilities: Provide specific facilities for separation and storage of materials for recycling, salvage, reuse, return, and trash disposal, for use by all contractors and installers.
 - 1. Provide containers as required.
 - 2. Provide adequate space for pick-up and delivery and convenience to subcontractors.
 - 3. Keep recycling and trash/waste bin areas neat and clean and clearly marked in order to avoid contamination of materials.
- F. Hazardous Wastes: Separate, store, and dispose of hazardous wastes according to applicable regulations.
- G. Recycling: Separate, store, protect, and handle at the site identified recyclable waste products in order to prevent contamination of materials and to maximize recyclability of identified

materials. Arrange for timely pickups from the site or deliveries to recycling facility in order to prevent contamination of recyclable materials.

- H. Reuse of Materials On-Site: Set aside, sort, and protect separated products in preparation for reuse.
- I. Salvage: Set aside, sort, and protect products to be salvaged for reuse off-site.

END OF SECTION

This page intentionally left blank

**SECTION 01 7800
CLOSEOUT SUBMITTALS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project record documents.
- B. Operation and maintenance data.
- C. Warranties and bonds.

1.02 RELATED REQUIREMENTS

- A. Section 00 4000 05.1 Sub Bonds: Performance bond and labor and material payment bonds, warranty, and correction of work.
- B. Section 01 3000 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- C. Section 01 7000 - Execution and Closeout Requirements: Contract closeout procedures.
- D. Individual Product Sections: Specific requirements for operation and maintenance data.
- E. Individual Product Sections: Warranties required for specific products or Work.

1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to Architect with claim for final Application for Payment.
- B. Operation and Maintenance Data:
 - 1. Submit an electronic copy of preliminary draft or proposed formats and outlines of contents before start of Work. Architect will review draft and return one copy with comments.
 - 2. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within ten days after acceptance.
 - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with Architect comments. Revise content of all document sets as required prior to final submission.
 - 4. Submit 1 electronic copy and 3 hard sets of revised final documents in final form within 10 days after final inspection.
- C. Warranties and Bonds:
 - 1. For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within 10 days after acceptance.
 - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
 - 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.
 - 2. Addenda.
 - 3. Change Orders and other modifications to the Contract.
 - 4. Reviewed shop drawings, product data, and samples.
 - 5. Manufacturer's instruction for assembly, installation, and adjusting.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.

- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:
 - 1. Field changes of dimension and detail.
 - 2. Details not on original Contract drawings.

3.02 OPERATION AND MAINTENANCE DATA

- A. Source Data: For each product or system, list names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

3.03 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- C. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.

3.04 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS

- A. For Each Item of Equipment and Each System:
 - 1. Description of unit or system, and component parts.
 - 2. Identify function, normal operating characteristics, and limiting conditions.
 - 3. Include performance curves, with engineering data and tests.
 - 4. Complete nomenclature and model number of replaceable parts.
- B. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.
- C. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- D. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and trouble shooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- E. Provide servicing and lubrication schedule, and list of lubricants required.
- F. Include manufacturer's printed operation and maintenance instructions.
- G. Include sequence of operation by controls manufacturer.
- H. Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- I. Additional Requirements: As specified in individual product specification sections.

3.05 ASSEMBLY OF OPERATION AND MAINTENANCE MANUALS

- A. Assemble operation and maintenance data into durable manuals for Owner's personnel use, with data arranged in the same sequence as, and identified by, the specification sections.
- B. Where systems involve more than one specification section, provide separate tabbed divider for each system.
- C. Binders: Commercial quality, 8-1/2 by 11 inch three D side ring binders with durable plastic covers; 2 inch maximum ring size. When multiple binders are used, correlate data into related consistent groupings.
- D. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Project Directory: Title and address of Project; names, addresses, and telephone numbers of Architect, Consultants, CMGC Contractor and subcontractors, with names of responsible parties.
- F. Tables of Contents: List every item separated by a divider, using the same identification as on the divider tab; where multiple volumes are required, include all volumes Tables of Contents in each volume, with the current volume clearly identified.
- G. Dividers: Provide tabbed dividers for each separate product and system; identify the contents on the divider tab; immediately following the divider tab include a description of product and major component parts of equipment.
- H. Text: Manufacturer's printed data, or typewritten data on 20 pound paper.
- I. Drawings: Provide with reinforced punched binder tab. Bind in with text; fold larger drawings to size of text pages.

3.06 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Owner to determine the method of submittal delivery; manual in a commercial quality binder, submitted digitally or a combination of both.
- F. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.

END OF SECTION

This page intentionally left blank

**SECTION 01 9113
GENERAL COMMISSIONING REQUIREMENTS**

PART 1 GENERAL

1.01 SUMMARY

- A. Commissioning is intended to achieve the following specific objectives; this section specifies the CMGC Contractor 's responsibilities for commissioning:
 - 1. Verify that the work is installed in accordance with Contract Documents and the manufacturer's recommendations and instructions, and that it receives adequate operational checkout prior to startup: Startup reports and Prefunctional Checklists executed by CMGC Contractor are utilized to achieve this.
 - 2. Verify and document that functional performance is in accordance with Contract Documents: Functional Tests executed by CMGC Contractor and witnessed by the Commissioning Provider are utilized to achieve this.
 - 3. Verify that operation and maintenance manuals submitted to Owner are complete: Detailed operation and maintenance (O&M) data submittals by CMGC Contractor are utilized to achieve this.
 - 4. Verify that the Owner's operating personnel are adequately trained: Formal training conducted by CMGC Contractor is utilized to achieve this.
- B. The Commissioning Provider directs and coordinates all commissioning activities; this section describes some but not all of the Commissioning Provider's responsibilities.

1.02 SCOPE OF COMMISSIONING

- A. The following are to be commissioned:
- B. Building envelope:
 - 1. Air tightness.
- C. Plumbing Systems:
 - 1. See plumbing specifications
- D. HVAC System:
 - 1. See mechanical specifications
- E. Electrical Systems:
 - 1. See electrical specifications
- F. Electronic Safety and Security:
 - 1. Security system, including doors and hardware.
 - 2. Fire and smoke alarms.
- G. Other equipment and systems explicitly identified elsewhere in Contract Documents as requiring commissioning.

1.03 RELATED REQUIREMENTS

- A. Section 01 7800 - Closeout Submittals: Scope and procedures for operation and maintenance manuals and project record documents.

PART 2 PRODUCTS

2.01 TEST EQUIPMENT

- A. Provide all standard testing equipment required to perform startup and initial checkout and required Functional Testing; unless otherwise noted such testing equipment will NOT become the property of Owner.
- B. Calibration Tolerances: Provide testing equipment of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified. If not otherwise noted, the following minimum requirements apply:
 - 1. Temperature Sensors and Digital Thermometers: Certified calibration within past year to accuracy of 0.5 degree F and resolution of plus/minus 0.1 degree F.

2. Pressure Sensors: Accuracy of plus/minus 2.0 percent of the value range being measured (not full range of meter), calibrated within the last year.
 3. Calibration: According to the manufacturer's recommended intervals and when dropped or damaged; affix calibration tags or keep certificates readily available for inspection.
- C. Equipment-Specific Tools: Where special testing equipment, tools and instruments are specific to a piece of equipment, are only available from the vendor, and are required in order to accomplish startup or Functional Testing, provide such equipment, tools, and instruments as part of the work at no extra cost to Owner; such equipment, tools, and instruments are to become the property of Owner.
- D. Dataloggers: Independent equipment and software for monitoring flows, currents, status, pressures, etc. of equipment.
1. Dataloggers required for Functional Tests will be provided by the Commissioning Provider and will not become the property of Owner.

PART 3 EXECUTION

3.01 COMMISSIONING PLAN

- A. Commissioning Provider has prepared the Commissioning Plan.
1. Require attendance and participation of relevant subcontractors, installers, suppliers, and manufacturer representatives.
- B. CMGC Contractor is responsible for compliance with the Commissioning Plan.
- C. Commissioning Plan: The commissioning schedule, procedures, and coordination requirements for all parties in the commissioning process.
- D. Commissioning Schedule:
1. Submit anticipated dates of startup of each item of equipment and system to Commissioning Provider within 60 days after award of contract.
 2. Re-submit anticipated startup dates monthly, but not less than 4 weeks prior to startup.
 3. Prefunctional Checklists and Functional Tests are to be performed in sequence from components, to subsystems, to systems.
 4. Provide sufficient notice to Commissioning Provider for delivery of relevant Checklists and Functional Test procedures to avoid delay.

3.02 STARTUP PLANS AND REPORTS

- A. Startup Plans: For each item of equipment and system for which the manufacturer provides a startup plan, submit the plan not less than 8 weeks prior to startup.
- B. Startup Reports: For each item of equipment and system for which the manufacturer provides a startup checklist (or startup plan or field checkout sheet), document compliance by submitting the completed startup checklist prior to startup, signed and dated by responsible entity.
- C. Submit directly to the Commissioning Provider.

3.03 PREFUNCTIONAL CHECKLISTS

- A. A Prefunctional Checklist is required to be filled out for each item of equipment or other assembly specified to be commissioned.
1. No sampling of identical or near-identical items is allowed.
 2. These checklists do not replace manufacturers' recommended startup checklists, regardless of apparent redundancy.
 3. Prefunctional Checklist forms will not be complete until after award of the contract; the following types of information will be gathered via the completed Checklist forms:
 - a. Certification by installing contractor that the unit is properly installed, started up, and operating and ready for Functional Testing.
 - b. Confirmation of receipt of each shop drawing and commissioning submittal specified, itemized by unit.

- c. Manufacturer, model number, and relevant capacity information; list information "as specified," "as submitted," and "as installed."
 - d. Serial number of installed unit.
 - e. List of inspections to be conducted to document proper installation prior to startup and Functional Testing; these will be primarily static inspections and procedures; for equipment and systems may include normal manufacturer's start-up checklist items and minor testing.
 - f. Sensor and actuator calibration information.
- B. CMGC Contractor is responsible for filling out Prefunctional Checklists, after completion of installation and before startup; witnessing by the Commissioning Provider is not required unless otherwise specified.
 - 1. Each line item without deficiency is to be witnessed, initialed, and dated by the actual witness; checklists are not complete until all line items are initialed and dated complete without deficiencies.
 - 2. Checklists with incomplete items may be submitted for approval provided the CMGC Contractor attests that incomplete items do not preclude the performance of safe and reliable Functional Testing; re-submission of the Checklist is required upon completion of remaining items.
 - 3. Individual Checklists may contain line items that are the responsibility of more than one installer; CMGC Contractor shall assign responsibility to appropriate installers or subcontractors, with identification recorded on the form.
 - 4. If any Checklist line item is not relevant, record reasons on the form.
 - 5. CMGC Contractor may independently perform startup inspections and/or tests, at CMGC Contractor's option.
 - 6. Regardless of these reporting requirements, CMGC Contractor is responsible for correct startup and operation.
 - 7. Submit completed Checklists to Commissioning Provider within 2 days of completion.
- C. Commissioning Provider is responsible for furnishing the Prefunctional Checklists to CMGC Contractor.
 - 1. Initial Drafts: CMGC Contractor is responsible for initial draft of Prefunctional Checklist where so indicated in Contract Documents.
 - 2. Provide all additional information requested by Commissioning Provider to aid in preparation of checklists, such as shop drawing submittals, manufacturers' startup checklists, and O&M data.
 - 3. Commissioning Provider may add any relevant items deemed necessary regardless of whether they are explicitly mentioned in Contract Documents or not.
 - 4. When asked to review the proposed Checklists, do so in a timely manner.
- D. Commissioning Provider Witnessing: Required for:
 - 1. Each piece of primary equipment, unless sampling of multiple similar units is allowed by the commissioning plan.
 - 2. A sampling of non-primary equipment, as allowed by the commissioning plan.
- E. Deficiencies: Correct deficiencies and re-inspect or re-test, as applicable, at no extra cost to Owner.
 - 1. If difficulty in correction would delay progress, report deficiency to the Commissioning Provider immediately.

3.04 FUNCTIONAL TESTS

- A. A Functional Test is required for each item of equipment, system, or other assembly specified to be commissioned, unless sampling of multiple identical or near-identical units is allowed by the final test procedures.
- B. CMGC Contractor is responsible for execution of required Functional Tests, after completion of Prefunctional Checklist and before closeout.

- C. Commissioning Provider is responsible for witnessing and reporting results of Functional Tests, including preparation and completion of forms for that purpose.
- D. CMGC Contractor is responsible for correction of deficiencies and re-testing at no extra cost to Owner; if a deficiency is not corrected and re-tested immediately, the Commissioning Provider will document the deficiency and the CMGC Contractor's stated intentions regarding correction.
 - 1. Deficiencies are any condition in the installation or function of a component, piece of equipment or system that is not in compliance with Contract Documents or does not perform properly.
 - 2. When the deficiency has been corrected, the CMGC Contractor completes the form certifying that the item is ready to be re-tested and returns the form to the Commissioning Provider; the Commissioning Provider will reschedule the test, and the CMGC Contractor shall re-test.
 - 3. Identical or Near-Identical Items: If 10 percent, or three, whichever is greater, of identical or near-identical items fail to perform due to material or manufacturing defect, all items will be considered defective; provide a proposal for correction within 2 weeks after notification of defect, including provision for testing sample installations prior to replacement of all items.
 - 4. CMGC Contractor shall bear the cost of Owner and Commissioning Provider personnel time witnessing re-testing.
 - 5. CMGC Contractor shall bear the cost of Owner and Commissioning Provider personnel time witnessing re-testing if the test failed due to failure to execute the relevant Prefunctional Checklist correctly; if the test failed for reasons that would not have been identified in the Prefunctional Checklist process, CMGC Contractor shall bear the cost of the second and subsequent re-tests.
- E. Functional Test Procedures:
 - 1. Some test procedures are included in Contract Documents; where Functional Test procedures are not included in Contract Documents, test procedures will be determined by the Commissioning Provider with input by and coordination with CMGC Contractor.
 - 2. Examples of Functional Testing:
 - a. Test the dynamic function and operation of equipment and systems (rather than just components) using manual (direct observation) or monitoring methods under full operation (e.g., the chiller pump is tested interactively with the chiller functions to see if the pump ramps up and down to maintain the differential pressure setpoint).
 - b. Systems are tested under various modes, such as during low cooling or heating loads, high loads, component failures, unoccupied, varying outside air temperatures, fire alarm, power failure, etc.
 - c. Systems are run through all the HVAC control system's sequences of operation and components are verified to be responding as the sequence's state.
 - d. Traditional air or water test and balancing (TAB) is not Functional Testing; spot checking of TAB by demonstration to the Commissioning Provider is Functional Testing.
- F. Deferred Functional Tests: Some tests may need to be performed later, after substantial completion, due to partial occupancy, equipment, seasonal requirements, design or other site conditions; performance of these tests remains the CMGC Contractor's responsibility regardless of timing.

3.05 SENSOR AND ACTUATOR CALIBRATION

- A. Calibrate all field-installed temperature, relative humidity, carbon monoxide, carbon dioxide, and pressure sensors and gauges, and all actuators (dampers and valves) on this piece of equipment shall be calibrated. Sensors installed in the unit at the factory with calibration certification provided need not be field calibrated.
- B. Calibrate using the methods described below; alternate methods may be used, if approved by Architect beforehand. See PART 2 for test instrument requirements. Record methods used on

the relevant Prefunctional Checklist or other suitable forms, documenting initial, intermediate, and final results.

- C. All Sensors:
 - 1. Verify that sensor location is appropriate and away from potential causes of erratic operation.
 - 2. Verify that sensors with shielded cable are grounded only at one end.
 - 3. For sensor pairs that are used to determine a temperature or pressure difference, for temperature make sure they are reading within 0.2 degree F of each other, and for pressure, within tolerance equal to 2 percent of the reading, of each other.
 - 4. Tolerances for critical applications may be tighter.
- D. Sensors Without Transmitters - Standard Application:
 - 1. Make a reading with a calibrated test instrument within 6 inches of the site sensor.
 - 2. Verify that the sensor reading, via the permanent thermostat, gauge or building automation system, is within the tolerances in the table below of the instrument-measured value.
 - 3. If not, install offset, calibrate or replace sensor.
- E. Sensors With Transmitters - Standard Application.
 - 1. Disconnect sensor.
 - 2. Connect a signal generator in place of sensor.
 - 3. Connect ammeter in series between transmitter and building automation system control panel.
 - 4. Using manufacturer's resistance-temperature data, simulate minimum desired temperature.
 - 5. Adjust transmitter potentiometer zero until 4 mA is read by the ammeter.
 - 6. Repeat for the maximum temperature matching 20 mA to the potentiometer span or maximum and verify at the building automation system.
 - 7. Record all values and recalibrate controller as necessary to comply with specified control ramps, reset schedules, proportional relationship, reset relationship and P/I reaction.
 - 8. Reconnect sensor.
 - 9. Make a reading with a calibrated test instrument within 6 inches of the site sensor.
 - 10. Verify that the sensor reading, via the permanent thermostat, gauge or building automation system, is within the tolerances in the table below of the instrument-measured value.
 - 11. If not, replace sensor and repeat.
 - 12. For pressure sensors, perform a similar process with a suitable signal generator.
- F. Sensor Tolerances for Standard Applications: Plus/minus the following maximums:
 - 1. Watthour, Voltage, Amperage: 1 percent of design.
 - 2. Pressure, Air, Water, Gas: 3 percent of design.
 - 3. Air Temperatures (Outside Air, Space Air, Duct Air): 0.4 degrees F.
 - 4. Relative Humidity: 4 percent of design.
 - 5. Barometric Pressure: 0.1 inch of Hg.
 - 6. Flow Rate, Air: 10 percent of design.
 - 7. Flow Rate, Water: 4 percent of design.
 - 8. AHU Wet Bulb and Dew Point: 2.0 degrees F.
- G. Critical Applications: For some applications more rigorous calibration techniques may be required for selected sensors. Describe any such methods used on an attached sheet.
- H. Valve/Damper Stroke Setup and Check:
 - 1. For all valve/damper actuator positions checked, verify the actual position against the control system readout.
 - 2. Set pump/fan to normal operating mode.

3. Command valve/damper closed; visually verify that valve/damper is closed and adjust output zero signal as required.
 4. Command valve/damper to open; verify position is full open and adjust output signal as required.
 5. Command valve/damper to a few intermediate positions.
 6. If actual valve/damper position does not reasonably correspond, replace actuator or add pilot positioner (for pneumatics).
- I. Isolation Valve or System Valve Leak Check: For valves not associated with coils.
1. With full pressure in the system, command valve closed.
 2. Use an ultra-sonic flow meter to detect flow or leakage.

3.06 TEST PROCEDURES - GENERAL

- A. Provide skilled technicians to execute starting of equipment and to execute the Functional Tests. Ensure that they are available and present during the agreed upon schedules and for sufficient duration to complete the necessary tests, adjustments and problem-solving.
- B. Provide all necessary materials and system modifications required to produce the flows, pressures, temperatures, and conditions necessary to execute the test according to the specified conditions. At completion of the test, return all affected equipment and systems to their pre-test condition.
- C. Sampling: Where Functional Testing of fewer than the total number of multiple identical or near-identical items is explicitly permitted, perform sampling as follows:
1. Identical Units: Defined as units with same application and sequence of operation; only minor size or capacity difference.
 2. Sampling is not allowed for:
 - a. Major equipment.
 - b. Life-safety-critical equipment.
 - c. Prefunctional Checklist execution.
 3. XX = the percent of the group of identical equipment to be included in each sample; defined for specific type of equipment.
 4. YY = the percent of the sample that if failed will require another sample to be tested; defined for specific type of equipment.
 5. Randomly test at least XX percent of each group of identical equipment, but not less than three units. This constitutes the "first sample."
 6. If YY percent of the units in the first sample fail, test another XX percent of the remaining identical units.
 7. If YY percent of the units in the second sample fail, test all remaining identical units.
 8. If frequent failures occur, the Commissioning Provider may stop the testing and require CMGC Contractor to perform and document a checkout of the remaining units prior to continuing testing.
- D. Manual Testing: Use hand-held instruments, immediate control system readouts, or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the "observation").
- E. Simulating Conditions: Artificially create the necessary condition for the purpose of testing the response of a system; for example apply hot air to a space sensor using a hair dryer to see the response in a VAV box.
- F. Simulating Signals: Disconnect the sensor and use a signal generator to send an amperage, resistance or pressure to the transducer and control system to simulate the sensor value.
- G. Over-Writing Values: Change the sensor value known to the control system in the control system to see the response of the system; for example, change the outside air temperature value from 50 degrees F to 75 degrees F to verify economizer operation.

- H. Indirect Indicators: Remote indicators of a response or condition, such as a reading from a control system screen reporting a damper to be 100 percent closed, are considered indirect indicators.
- I. Monitoring: Record parameters (flow, current, status, pressure, etc.) of equipment operation using dataloggers or the trending capabilities of the relevant control systems; where monitoring of specific points is called for in Functional Test Procedures:
 - 1. All points that are monitored by the relevant control system shall be trended by CMGC Contractor ; at the Commissioning Provider's request, CMGC Contractor shall trend up to 20 percent more points than specified at no extra charge.
 - 2. Other points will be monitored by the Commissioning Provider using dataloggers.
 - 3. At the option of the Commissioning Provider, some control system monitoring may be replaced with datalogger monitoring.
 - 4. Provide hard copies of monitored data in columnar format with time down left column and at least 5 columns of point values on same page.
 - 5. Graphical output is desirable and is required for all output if the system can produce it.
 - 6. Monitoring may be used to augment manual testing.

3.07 OPERATION AND MAINTENANCE MANUALS

- A. See Section 01 7800 - Closeout Submittals for additional requirements.
- B. Add design intent documentation furnished by Architect to manuals prior to submission to Owner.
- C. Submit manuals related to items that were commissioned to Commissioning Provider for review; make changes recommended by Commissioning Provider.

END OF SECTION

This page intentionally left blank

**SECTION 02 4100
DEMOLITION**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Building demolition excluding removal of hazardous materials and toxic substances.
- B. Selective demolition of built site elements.
- C. Selective demolition of building elements for alteration purposes.
- D. Abandonment and removal of existing utilities and utility structures.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on CMGC Contractor 's use of site and premises.
- B. Section 01 1000 - Summary: Sequencing and staging requirements.
- C. Section 01 1000 - Summary: Description of items to be salvaged or removed for re-use by CMGC Contractor .
- D. Section 01 5000 - Temporary Facilities and Controls: Site fences, security, protective barriers, and waste removal.
- E. Section 01 5713 - Temporary Erosion and Sediment Control.
- F. Section 01 6000 - Product Requirements: Handling and storage of items removed for salvage and relocation.
- G. Section 01 7000 - Execution and Closeout Requirements: Project conditions; protection of bench marks, survey control points, and existing construction to remain; reinstallation of removed products; temporary bracing and shoring.
- H. Section 01 7419 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- I. Section 07 0150.19 - Preparation for Re-Roofing: Removal of existing roofing, roof insulation, flashing, trim, and accessories.
- J. Section 31 1000 - Site Clearing: Vegetation and existing debris removal.
- K. Section 31 2200 - Grading: Topsoil removal.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2027.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Site Plan: Showing:
 - 1. Vegetation to be protected.
 - 2. Areas for temporary construction and field offices.
 - 3. Areas for temporary and permanent placement of removed materials.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities and subsurface construction.

PART 2 PRODUCTS

2.01 MATERIALS

- A. N/A

PART 3 EXECUTION

3.01 SCOPE

- A. Remove portions of existing buildings:

1. see plans for extent.
- B. Remove other items indicated, for salvage, relocation, and recycling.

3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. Comply with other requirements specified in Section 01 7000.
- B. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
 1. Obtain required permits.
 2. Comply with applicable requirements of NFPA 241.
 3. Use of explosives is not permitted.
 4. Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 5. Provide, erect, and maintain temporary barriers and security devices.
 6. Use physical barriers to prevent access to areas that could be hazardous to workers or the public.
 7. Conduct operations to minimize effects on and interference with adjacent structures and occupants.
 8. Do not close or obstruct roadways or sidewalks without permit.
 9. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
 10. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.
- C. Do not begin removal until receipt of notification to proceed from Owner.
- D. Do not begin removal until built elements to be salvaged or relocated have been removed.
- E. Do not begin removal until vegetation to be relocated has been removed and specified measures have been taken to protect vegetation to remain.
- F. Protect existing structures and other elements that are not to be removed.
 1. Provide bracing and shoring.
- G. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- H. If hazardous materials are discovered during removal operations, stop work and notify Architect and Owner; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.

3.03 EXISTING UTILITIES

- A. Coordinate work with utility companies; notify before starting work and comply with their requirements; obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Owner.
- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least a 7 day prior written notification to Owner.
- F. Locate and mark utilities to remain; mark using highly visible tags or flags, with identification of utility type; protect from damage due to subsequent construction, using substantial barricades if necessary.
- G. Remove exposed piping, valves, meters, equipment, supports, and foundations of disconnected and abandoned utilities.

- H. Prepare building demolition areas by disconnecting and capping utilities outside the demolition zone; identify and mark utilities to be subsequently reconnected, in same manner as other utilities to remain.

3.04 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as indicated.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Separate areas in which demolition is being conducted from other areas that are still occupied.
 - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 01 5000 in locations indicated on drawings.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction specified.
 - 2. Remove items indicated on drawings.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove existing systems and equipment as indicated.
 - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
 - 2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - 3. See Section 01 1000 for other limitations on outages and required notifications.
 - 4. Verify that abandoned services serve only abandoned facilities before removal.
 - 5. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification.
- F. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
 - 4. Patch as specified for patching new work.

3.05 DEBRIS AND WASTE REMOVAL

- A. Remove debris, junk, and trash from site.
- B. Remove from site all materials not to be reused on site; comply with requirements of Section 01 7419 - Waste Management.
- C. Leave site in clean condition, ready for subsequent work.
- D. Clean up spillage and wind-blown debris from public and private lands.

END OF SECTION

This page intentionally left blank

**SECTION 03 4500
PRECAST ARCHITECTURAL CONCRETE**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Architectural precast concrete cap at top of CMU veneer.
- B. Architectural precast concrete accessories.
- C. Supports, anchors, and attachments.

1.02 RELATED REQUIREMENTS

- A. Section 03 3000 - Cast-in-Place Concrete: Admixtures.
- B. Section 07 9200 - Joint Sealants: Sealing perimeter and intermediate joints.

1.03 REFERENCE STANDARDS

- A. ACI CODE-318 - Building Code for Structural Concrete—Code Requirements and Commentary; 2025.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel; 2019.
- C. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2023.
- D. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement; 2026.
- E. ASTM C150/C150M - Standard Specification for Portland Cement; 2024.
- F. ASTM C260/C260M - Standard Specification for Air-Entraining Admixtures for Concrete; 2024.
- G. ASTM C979/C979M - Standard Specification for Pigments for Integrally Colored Concrete; 2024.
- H. ASTM C1602/C1602M - Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete; 2022.
- I. PCI MNL-117 - Manual for Quality Control for Plants and Production of Architectural Precast Concrete Products; 2013.
- J. PCI MNL-120 - PCI Design Handbook; 2025.
- K. PCI MNL-122 - Architectural Precast Concrete; 2007.
- L. PCI MNL-123 - Connections Manual: Design and Typical Details of Connections for Precast and Prestressed Concrete; 1988.
- M. PCI MNL-135 - Tolerance Manual for Precast and Prestressed Concrete Construction; 2000.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Manufacturer's information on accessory products, including pigments, admixtures, inserts, plates, etc.
- C. Shop Drawings: Indicate layout, unit locations, configuration, unit identification marks, reinforcement, integral insulation, insulated panel system connectors, connection details, support items, location of lifting devices, dimensions, openings, and relationship to adjacent materials. Provide erection drawings.
- D. Samples: Submit two _____, 12" by 12" inch in size, illustrating surface finish, color and texture.
- E. Maintenance Data: Indicate surface cleaning instructions.

1.05 QUALITY ASSURANCE

- A. Fabricator Qualifications:

1. Firm having at least 2 years of documented experience in production of precast concrete of the type required.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Handling: Lift and support precast units only from support points.
- B. Protect units to prevent staining, chipping, or spalling of concrete.

PART 2 PRODUCTS

2.01 PRECAST UNITS, GENERAL

- A. Precast Architectural Concrete Units: Comply with PCI MNL-120, PCI MNL-122, PCI MNL-123, PCI MNL-135, and ACI CODE-318.
 1. Concrete Face Mix: Minimum 5000 psi, 28 day strength, air entrained to 5 to 7 percent; comply with ACI SPEC-301.
- B. Finish Type A: Ensure exposed-to-view finish surfaces of precast units are uniform in color and appearance. Replace any units deemed not acceptable by the architect
- C. Hone any exposed to view edges which are rough or otherwise unfinished looking.

2.02 REINFORCEMENT

- A. Reinforcing Steel: ASTM A615/A615M, Grade 60 (60,000 psi).
 1. Deformed billet-steel bars.

2.03 CONCRETE MATERIALS

- A. Cement: ASTM C150/C150M, Type I - Normal Portland type.
- B. Color Additives: Pure, concentrated mineral pigments specifically intended for mixing into concrete and complying with ASTM C979/C979M.
 1. Color(s): As selected by Architect from manufacturer's full range.
- C. Water: ASTM C1602/C1602M; clean, potable, and not detrimental to concrete.
- D. Air Entrainment Admixture: ASTM C260/C260M.

2.04 SUPPORT DEVICES

- A. Connecting and Support Devices; Anchors and Inserts: ASTM A36/A36M steel; hot-dip galvanized in accordance with ASTM A153/A153M.
 1. Clean surfaces of rust, scale, grease, and foreign matter.

2.05 FABRICATION

- A. Fabricate in compliance with PCI MNL-117 and PCI MNL-135.
- B. Maintain consistent quality during manufacture.
- C. Fabricate connecting devices, plates, angles, items fit to steel framing members, inserts, bolts, and accessories. Fabricate to permit initial placement and final attachment.
- D. Embed reinforcing steel, anchors, inserts plates, angles, and other cast-in items.
- E. Cure units to develop concrete quality, and to minimize appearance blemishes such as non-uniformity, staining, or surface cracking.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that building structure, anchors, devices, and openings are ready to receive work of this section.

3.02 ERECTION

- A. Erect units without damage to shape or finish. Replace or repair damaged panels.
- B. Erect units level and plumb within allowable tolerances.
- C. Fasten units in place with mechanical connections.

3.03 PROTECTION

- A. Protect installed wall caps from subsequent construction operations.

3.04 SCHEDULES

- A. Profiles: see architectural drawings for profiles.

END OF SECTION

This page intentionally left blank

**SECTION 04 7300
MANUFACTURED STONE MASONRY**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Adhered manufactured stone masonry veneer (AMSMV).
- B. Installation materials.
- C. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 04 2000 - Unit Masonry: Through-wall masonry flashings.
- B. Section 05 4000 - Cold-Formed Metal Framing: Steel stud backup for AMSMV.
- C. Section 07 2500 - Weather Barriers: Water-resistive barrier over sheathing.
- D. Section 07 6200 - Sheet Metal Flashing and Trim: Through-wall masonry flashings.
- E. Section 09 2236 - Lath: Lathing and accessories for scratch coat.

1.03 REFERENCE STANDARDS

- A. ASTM C270 - Standard Specification for Mortar for Unit Masonry; 2025b.
- B. ASTM C841 - Standard Specification for Installation of Interior Lathing and Furring; 2023.
- C. ASTM C847 - Standard Specification for Metal Lath; 2018 (Reapproved 2024).
- D. ASTM C926 - Standard Specification for Application of Portland Cement-Based Plaster; 2026.
- E. ASTM C1063 - Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster; 2025a.
- F. ASTM C1670/C1670M - Standard Specification for Adhered Manufactured Stone Masonry Veneer Units; 2024a.
- G. ASTM C1714/C1714M - Standard Specification for Preblended Dry Mortar Mix for Unit Masonry; 2025.
- H. ASTM C1780 - Standard Practice for Installation Methods for Cement-Based Adhered Masonry Veneer; 2026.
- I. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- J. ICC-ES AC51 - Acceptance Criteria for Adhered Manufactured Stone Masonry Veneer; 2018, with Editorial Revision (2021).
- K. NCMA (AMSV) - Installation Guide and Detailing Options for Compliance with ASTM C1780 for Adhered Manufactured Stone Veneer; Current Edition, Including All Revisions.
- L. NCMA TEK 20-01 - Key Installation Checkpoints for Manufactured Stone Veneer; 2014.
- M. TMS 402/602 - Building Code Requirements and Specification for Masonry Structures; 2022, with Errata (2024).

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Samples: Submit four samples of AMSMV units to illustrate color, texture, and extremes of color range.

1.05 MOCK-UPS

- A. Construct mock-up panel 6 feet long by 6 feet high; include AMSMV, lightweight synthetic stone veneer, mortar, accessories, substrate, and representative wall openings.
- B. See Section 01 4000 - Quality Requirements for additional requirements.
- C. Mock-up may remain as part of the work.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect products from precipitation combined with freezing temperatures. Do not install products with visible frozen moisture.
- C. Protect Portland cement based materials from moisture and humidity. Store under cover off the ground in a dry location.

1.07 FIELD CONDITIONS

- A. Cold and Hot Weather Requirements: Comply with requirements of TMS 402/602 or applicable building code, whichever is more stringent.

1.08 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.
- B. Correct defective work within a five year period after Date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Adhered Manufactured Stone Masonry Veneer (AMSMV):
 - 1. Eldorado Stone, Westlake Royal Building Products:
www.westlakeroyalbuildingproducts.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 ADHERED MANUFACTURED STONE MASONRY VENEER (AMSMV)

- A. AMSMV: Cast masonry units using a mixture of cement, lightweight aggregates, concrete additives and color pigments to replicate appearance of natural stone and designed to be applied with a cementitious mortar to a backing surface, complying with ASTM C1670/C1670M and ICC-ES AC51.
 - 1. Style: As indicated on drawings.
 - 2. Color, Texture, Range, Special Shapes: As indicated on drawings.
 - 3. Walls: Provide with single color and texture throughout.

2.03 MORTAR APPLICATIONS

- A. Use only factory premixed packaged dry materials for mortar, with addition of water only at project site.
 - 1. Exception: If a specified mix design is not available in a premixed dry package, provide equivalent mix design using standard non-premixed materials.

2.04 MORTAR MIXES

- A. Packaged Dry Material for Mortar for Unit Masonry: Premixed Portland cement, hydrated lime, and sand; complying with ASTM C1714/C1714M and capable of producing mortar of specified strength in accordance with ASTM C270 with addition of water only.
 - 1. Type: Type S.
 - 2. Color: Mineral pigments added as required to produce approved color sample.

2.05 ACCESSORIES

- A. Lath: See Section 09 2236.
- B. Metal Lath with Rainscreen Drainage Material: Factory-assembled combination of mesh drainage material and metal lath.
 - 1. Diamond Mesh Metal Lath: ASTM C847, galvanized, self-furring.
 - a. Weight: To suit application and as specified in ASTM C841 for framing spacing.
 - b. Weight: 2.5 lb/sq yd, minimum.
 - 2. Rainscreen Drainage Mesh: 90 percent open non-woven polyester mesh.
 - a. Thickness: 1/4 inch.

- b. Surface Burning Characteristics: Flame spread index of 25 or less, smoke developed index of 450 or less (Class A), when tested in accordance with ASTM E84.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that backup wall system construction complies with AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 and ICC-ES AC51.
- B. Verify that substrates to receive mortar scratch coat or setting bed comply with AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 and ICC-ES AC51:
 - 1. Concrete Masonry: Verify joints are cut flush and surface is ready to receive mortar setting bed. Verify no bituminous or water repellent coatings exist on masonry surface.
 - 2. Metal Lath and Accessories: Verify lath is flat, secured to substrate, and joint and surface perimeter accessories are in place.
- C. Verify that related items provided under other sections are properly sized and located.
- D. Verify that built-in items are in proper location, and ready for installation of AMSMV.

3.02 INSTALLATION - WATER-RESISTIVE BARRIER

- A. Where required by AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 or ICC-ES AC51, install 2 layers of water-resistive barrier in accordance with water-resistive barrier manufacturer's instructions. Integrate water-resistive barrier with all flashing accessories, adjacent water-resistive barriers, doors, windows, penetrations, and cladding transitions.

3.03 INSTALLATION - RAINSCREEN DRAINAGE MATERIAL

- A. Install rainscreen drainage material and metal lath with accessories over sheathing material and water-resistive barrier with fastening system in accordance with ASTM C1063 into wood or metal studs. Install drainage material with filter fabric mortar screen to exterior.
- B. Install metal lath with rainscreen drainage material in accordance with manufacturer's instructions.

3.04 INSTALLATION - SCRATCH COAT

- A. Apply mortar scratch coat of 1/2 inch nominal to cover metal lath in accordance with ASTM C926. Scratch surface when somewhat firm. If scratch coat dries before applying setting bed mortar and AMSMV, moisten scratch coat by misting it with water.

3.05 INSTALLATION - AMSMV

- A. Install AMSMV with a cementitious mortar setting bed to a scratch coat backing surface, in accordance with AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 and ICC-ES AC51.
- B. Mortar Joints: Flush.
 - 1. Style: Wide overgrout.
- C. Windows, Doors and Wall Openings: Butt AMSMV units to wall opening.
- D. Sills: Install sills where located on drawings.
- E. Caps: Install capstones where located on drawings.
- F. Seal all joints at wall openings and penetrations with sealant approved for use with AMSMV.

3.06 INSTALLATION - MASONRY FLASHINGS

- A. Whether or not specifically indicated, install masonry flashing to divert water to exterior at all locations where downward flow of water will be interrupted.

3.07 CUTTING AND FITTING

- A. Cut and fit for pipes and conduit. Coordinate with other sections of work to provide correct size, shape, and location.

3.08 CLEANING

- A. Remove excess mortar and mortar smears as work progresses.
- B. Replace defective mortar. Match adjacent work.
- C. Clean AMSMV in accordance with manufacturer's installation instructions.
- D. Clean soiled surfaces with cleaning solution.

END OF SECTION

**SECTION 06 1000
ROUGH CARPENTRY**

PART 1 GENERAL

1.01 SECTION INCLUDES (SEE STRUCTURAL SHEET NOTES)

- A. Nonstructural dimension lumber framing.
- B. Rough opening framing for doors, windows, and roof openings.
- C. Sheathing.
- D. Roof-mounted curbs.
- E. Roofing nailers.
- F. Preservative treated wood materials.
- G. Miscellaneous framing and sheathing.
- H. Concealed wood blocking, nailers, and supports.
- I. Miscellaneous wood nailers, furring, and grounds.

1.02 RELATED REQUIREMENTS

- A. Section 05 1200 - Structural Steel Framing: Prefabricated beams and columns for support of wood framing.
- B. Section 05 5000 - Metal Fabrications: Miscellaneous steel connectors and support angles for wood framing.
- C. Section 07 6200 - Sheet Metal Flashing and Trim:

1.03 REFERENCE STANDARDS

- A. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2023.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- C. AWC (WFCM) - Wood Frame Construction Manual for One- and Two-Family Dwellings; 2024, with Errata.
- D. AWPA U1 - Use Category System: User Specification for Treated Wood; 2025.
- E. PS 1 - Structural Plywood; 2023.
- F. PS 20 - American Softwood Lumber Standard; 2025.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide technical data on wood preservative materials.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.

1.06 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
 - 1. Species: Douglas Fir, unless otherwise indicated. See structural dwgs
 - 2. Grading Agency: Grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee at www.alsc.org, and who provides grading

service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.

- B. Lumber fabricated from old growth timber is not permitted.

2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

- A. Sizes: Nominal sizes as indicated on drawings, S4S.
- B. Moisture Content: S-dry or MC19.
- C. Stud Framing (2 by 2 through 2 by 6):
 - 1. Grade: No. 2. or better
- D. Joist, Rafter, and Small Beam Framing (2 by 6 through 4 by 16):
 - 1. Machine stress-rated (MSR) as follows:
 - 2. Species: Douglas Fir.
- E. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
 - 1. Lumber: S4S, No. 2 or Standard Grade.
 - 2. Boards: Standard or No. 3.

2.03 CONSTRUCTION PANELS

- A. Communications and Electrical Room Mounting Boards: PS 1 A-D plywood, or medium density fiberboard; 3/4 inch thick; flame spread index of 25 or less, smoke developed index of 450 or less, when tested in accordance with ASTM E84.

2.04 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Metal and Finish: Hot-dipped galvanized steel complying with ASTM A153/A153M for high humidity and preservative-treated wood locations, unfinished steel elsewhere.

2.05 FACTORY WOOD TREATMENT

- A. Treated Lumber and Plywood: Comply with requirements of AWWA U1 - Use Category System for wood treatments determined by use categories, expected service conditions, and specific applications.
 - 1. Fire-Retardant Treated Wood: Mark each piece of wood with producer's stamp indicating compliance with specified requirements.
 - 2. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWWA standards.
- B. Preservative Treatment:
 - 1. Preservative Pressure Treatment of Lumber Above Grade: AWWA U1, Use Category UC3B, Commodity Specification A using waterborne preservative.
 - a. Kiln dry lumber after treatment to maximum moisture content of 19 percent.
 - b. Treat lumber exposed to weather.
 - c. Treat lumber in contact with roofing, flashing, or waterproofing.
 - d. Treat lumber in contact with masonry or concrete.
 - e. Treat lumber less than 18 inches above grade.
 - f. Treat lumber in other locations as indicated.
 - 2. Preservative Pressure Treatment of Plywood Above Grade: AWWA U1, Use Category UC2 and UC3B, Commodity Specification F using waterborne preservative.
 - a. Kiln dry plywood after treatment to maximum moisture content of 19 percent.
 - b. Treat plywood in contact with roofing, flashing, or waterproofing.
 - c. Treat plywood in contact with masonry or concrete.
 - d. Treat plywood less than 18 inches above grade.
 - e. Treat plywood in other locations as indicated.

PART 3 EXECUTION

3.01 PREPARATION

- A. Where wood framing bears on cementitious foundations, install full width sill flashing continuous over top of foundation, lap ends of flashing minimum of 4 inches and seal.
- B. Coordinate installation of rough carpentry members specified in other sections.

3.02 INSTALLATION - GENERAL

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.

3.03 FRAMING INSTALLATION

- A. Set structural members level, plumb, and true to line. Discard pieces with defects that would lower required strength or result in unacceptable appearance of exposed members.
- B. Make provisions for temporary construction loads, and provide temporary bracing sufficient to maintain structure in true alignment and safe condition until completion of erection and installation of permanent bracing.
- C. Install structural members full length without splices unless otherwise specifically detailed.
- D. Comply with member sizes, spacing, and configurations indicated, and fastener size and spacing indicated, but not less than required by applicable codes and AWC (WFCM) Wood Frame Construction Manual.
- E. Install horizontal spanning members with crown edge up and not less than 1-1/2 inches of bearing at each end.
- F. Frame wall openings with two or more studs at each jamb; support headers on cripple studs.

3.04 BLOCKING, NAILERS, AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In walls, provide blocking attached to studs as backing and support for wall-mounted items, unless item can be securely fastened to two or more studs or other method of support is explicitly indicated.
- C. Where ceiling-mounting is indicated, provide blocking and supplementary supports above ceiling, unless other method of support is explicitly indicated.
- D. Provide the following specific nonstructural framing and blocking:
 - 1. Cabinets and shelf supports.
 - 2. Wall brackets.
 - 3. Handrails.
 - 4. Grab bars.
 - 5. Towel and bath accessories.
 - 6. Wall-mounted door stops.
 - 7. Wall mounted medical equipment or other as directed by owner
 - 8. Art work as directed by owner
 - 9. Chalkboards and marker boards.
 - 10. Wall paneling and trim.
 - 11. Joints of rigid wall coverings that occur between studs.

3.05 ROOF-RELATED CARPENTRY

- A. Coordinate installation of roofing carpentry with deck construction, framing of roof openings, and roofing assembly installation.
- B. Provide wood curb at each roof opening except where prefabricated curbs are specified and where specifically indicated otherwise; form corners by alternating lapping side members.

3.06 INSTALLATION OF CONSTRUCTION PANELS

- A. Wall Sheathing: Secure with long dimension perpendicular to wall studs, with ends over firm bearing and staggered, using nails, screws, or staples.
- B. Communications and Electrical Room Mounting Boards: Secure with screws to studs with edges over firm bearing; space fasteners at maximum 24 inches on center on all edges and into studs in field of board.
 - 1. At fire-rated walls, install board over wall board indicated as part of the fire-rated assembly.
 - 2. Where boards are indicated as full floor-to-ceiling height, install with long edge of board parallel to studs.
 - 3. Install adjacent boards without gaps.
 - 4. Size and Location: As indicated on drawings.

3.07 TOLERANCES

- A. Framing Members: 1/4 inch from true position, maximum.
- B. Variation from Plane, Other than Floors: 1/4 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

3.08 CLEANING

- A. Do not leave wood, shavings, sawdust, etc. on the ground or buried in fill.
- B. Prevent sawdust and wood shavings from entering the storm drainage system.

END OF SECTION

**SECTION 07 1300
VAPOR BARRIER**

PART 1 – GENERAL

1.01 SUMMARY

- A. Products supplied under this section:
 - 1. Vapor barrier and installation accessories for installation under concrete slabs.
- B. Related sections:
 - 1. Section 07 26 00 Vapor Retarders

REFERENCES

- A. American Society for Testing and Materials (ASTM):
 - 1. ASTM E1745- 11Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill Under Concrete Slabs.
 - 2. ASTM E1643- 11Selection, Design, Installation, and Inspection of Water Vapor Retarders Used in Contact with Earth or Granular Fill Under Concrete Slabs.
- B. Technical Reference - American Concrete Institute (ACI):
 - 1. ACI 302.2R-06 Guide for Concrete Slabs that Receive Moisture-Sensitive Flooring Materials.
 - 2. ACI 302.1R-15 Guide to Concrete Floor and Slab Construction.

SUBMITTALS

- A. Quality control/assurance:
 - 1. Summary of test results per paragraph 9.3 of ASTM E1745.
 - 2. Manufacturer's samples and literature.
 - 3. Manufacturer's installation instructions for placement, seaming, penetration prevention and repair, and perimeter seal per ASTM E1643.
 - 4. All mandatory ASTM E1745 testing must be performed on a single production roll per ASTM E1745 Section 8.1.
 - 5. Contact vapor barrier manufacturer to schedule a pre-construction meeting and to coordinate a review, in-person or digital, of the vapor barrier installation.
 - 6. Vapor barrier manufacturer must warrant in writing (a) compliance with the designated ASTM E1745 classification, and (b) no manufacturing defects in the product for, at least, the Life of the Building.
 - 7. Manufacturer verify in writing 20 years in the industry with no reported product failures.

PART 2 – PRODUCTS

4.01 MATERIALS

4.02 VAPOR BARRIER SHALL HAVE ALL OF THE FOLLOWING QUALITIES:

- 1. Maintain permeance of less than 0.01 Perms [grains/(ft² · hr · inHg)] as tested in accordance with mandatory conditioning tests per ASTM E1745 Section 7.1 (7.1.1-7.1.5).
- 2. Other performance criteria:
 - a. Strength: ASTM E1745 Class A.
 - b. Thickness: 15 mils minimum
- 3. Provide third party documentation that all testing was performed on a single production roll per ASTM E1745 Section 8.1
- B. Vapor barrier products:
 - 1. Basis of Design: Stego Wrap Vapor Barrier (15-mil) by Stego Industries LLC., (877) 464-7834 www.stegoindustries.com.
 - 2. No substitutions.

ACCESSORIES

- A. Seams:

STEGO TAPE BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

- A. Sealing Penetrations of Vapor barrier:

STEGO MASTIC BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

STEGO TAPE BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

- A. Stego Crete Claw by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com.

STEGO TERM BAR BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

1. StegoTack Tape (double-sided sealant tape) by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com.
- B. Penetration Prevention:
 1. Beast Foot by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com.
 2. Beast Form Stake by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com
- C. Vapor Barrier-Safe Screed System
 1. Beast Screed by Stego Industries, LLC, (877) 464-7834 www.stegoindustries.com.

PART 3 – EXECUTION

10.01 PREPARATION

- A. Ensure that bottom of joist are free of sharp objects that can penetrate the vapor barrier

INSTALLATION

- A. Install vapor barrier in accordance ASTM E1643.
1. Unroll vapor barrier with the longest dimension parallel with the direction of the crawl space and face laps away from the expected direction of the placement whenever possible.
 2. Extend vapor barrier to the perimeter of the foundation. Terminate it 6" below the top of the foundation.
 3. Crete Claw is the best option. When sealing to a stem wall or wall,
 4. the best option is to use StegoTack Tape or both StegoTack Tape and Stego Term Bar.]
 - a. OR
 - b. Seal vapor barrier to the entire perimeter wall or footing/grade beam with double sided StegoTack Tape, or both Stego Term Bar and StegoTack Tape, per manufacturer's instructions. Ensure the concrete is clean and dry prior to adhering tape.
 5. Overlap joints 6 inches and seal with manufacturer's seam tape.
 6. Apply seam tape/Crete Claw to a clean and dry vapor barrier.
 7. Seal all penetrations (including pipes) and mechanical attachments per manufacturer's instructions.
 8. Repair damaged areas with vapor barrier material of similar (or better) permeance, puncture and tensile.

END OF SECTION

SECTION 07 2100 THERMAL INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Board insulation at exterior wall behind _____ wall finish.

1.02 RELATED REQUIREMENTS

1.03 REFERENCE STANDARDS

- A. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation; 2023.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on product characteristics, performance criteria, and product limitations.
- C. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 FIELD CONDITIONS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

PART 2 PRODUCTS

2.01 APPLICATIONS

- A. Insulation Over Wood Stud Framed Walls, Continuous: Extruded polystyrene (XPS) board.

2.02 FOAM BOARD INSULATION MATERIALS

- A. Extruded Polystyrene (XPS) Continuous Insulation (CI) Board: Comply with ASTM C578, and manufactured using carbon black technology.
 - 1. Flame Spread Index (FSI): Class A - 0 to 25, when tested in accordance with ASTM E84.
 - 2. Smoke Developed Index (SDI): 450 or less, when tested in accordance with ASTM E84.
 - 3. Type and Thermal Resistance, R-value: Type IV, 5.6 (0.98), minimum, per 1 inch thickness at 75 degrees F mean temperature.
 - 4. Board Size: 48 inch by 96 inch.
 - 5. Board Thickness: 1-3/4 inch.
 - 6. Board Edges: Shiplap, at long edges.

2.03 ACCESSORIES

- A. Adhesive: Type recommended by insulation manufacturer for application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation.
- B. Verify substrate surfaces are flat, free of honeycomb, fins, irregularities, or materials or substances that may impede adhesive bond.

3.02 BOARD INSTALLATION AT EXTERIOR WALLS

- A. Adhere 6 inches wide strip of polyethylene sheet over expansion joints with double beads of adhesive each side of joint.
- B. Apply adhesive to back of boards:
- C. Install boards horizontally on walls.

1. Place boards to maximize adhesive contact.
 2. Butt edges and ends tightly to adjacent boards and protrusions.
- D. Extend boards over expansion joints, unbonded to wall on one side of joint.
- E. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements for additional requirements.

3.04 PROTECTION

- A. Do not permit installed insulation to be damaged prior to its concealment.

END OF SECTION

SECTION 07 2500 WEATHER BARRIERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Water-resistive barriers.

1.02 RELATED REQUIREMENTS

- A. Section 07 2100 - Thermal Insulation: Weather barrier installed in conjunction with batt insulation.
- B. Section 07 6200 - Sheet Metal Flashing and Trim: Metal flashings installed in conjunction with weather barriers.

1.03 DEFINITIONS

- A. Weather Barriers: Materials or assemblies forming water-resistive barriers, air barriers, vapor retarders, or combination of one or more assemblies.

1.04 REFERENCE STANDARDS

- A. ASTM D5590 - Standard Test Method for Determining the Resistance of Paint Films and Related Coatings to Fungal Defacement by Accelerated Four-Week Agar Plate Assay; 2026.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- C. ASTM E96/E96M - Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials; 2024a.
- D. ASTM E2178 - Standard Test Method for Determining Air Leakage Rate and Calculation of Air Permeance of Building Materials; 2021a.
- E. ASTM E2357 - Standard Test Method for Determining Air Leakage Rate of Air Barrier Assemblies; 2025.
- F. ICC-ES AC212 - Acceptance Criteria for Water-Resistive Coatings Used as Water-Resistive Barriers over Exterior Sheathing; 2015, with Editorial Revision (2020).

1.05 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on material characteristics.
- C. Shop Drawings: Provide drawings of special joint conditions.

1.06 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by materials manufacturers before, during, and after installation.

PART 2 PRODUCTS

2.01 WATER-RESISTIVE BARRIERS

- A. Description: Materials installed behind exterior wall coverings; designed to prevent liquid water from further penetration into exterior wall assembly. Primary materials include fluid-applied membranes; accessory materials include flashings and seam tapes.
- B. Weather-Resistive Barrier Coating: Fluid-applied air and water-resistive coating for various exterior substrates.
 - 1. Dry Film Thickness (DFT): 17 mils, 0.017 inch, minimum.
 - 2. Air Permeance, Building Assembly Air Leakage Rate: Not greater than 0.04 cfm/sq ft when tested at 1.57 psf in accordance with ASTM E2357.
 - 3. Air Permeance, Building Material Air Leakage Rate: 0.004 cfm/sq ft maximum leakage when tested at 1.57 psf pressure difference in accordance with ASTM E2178.
 - 4. Water-Resistive Barrier over Sheathing Compliance: Complying with ICC-ES AC212.

5. Water Vapor Permeance: Tested in accordance with ASTM E96/E96M.
 - a. Procedure A: Greater than 5 perms.
 - b. Procedure B: Greater than 14 perms.
6. Ultraviolet (UV) and Weathering Resistance: Approved by manufacturer for up to 120 days of weather exposure.
7. Surface Burning Characteristics: Flame spread index of 25 or less, smoke developed index of 450 or less, Class A when tested in accordance with ASTM E84.
8. Resistance to Fungal Growth: No growth when tested in accordance with ASTM D5590.
9. System Accessory Products: As recommended by coating manufacturer.

2.02 ACCESSORIES

- A. Flashings and Sealants: As recommended by water-resistive barrier manufacturer for application.
- B. Sealant for Cracks and Joints In Substrates: Resilient elastomeric joint sealant compatible with substrates and weather barrier materials.
 1. Application: Apply at 30 to 40 mil, 0.030 to 0.040 inch nominal thickness.
 2. Color: Green.
- C. Primer: Liquid applied polymer.
 1. Color: Green.
- D. Liquid Flashing: One part, fast curing, nonsag, elastomeric, gun grade, trowelable liquid flashing.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and conditions comply with requirements of this section.

3.02 PREPARATION

- A. Remove projections, protruding fasteners, and loose or foreign matter that might interfere with proper installation.

3.03 INSTALLATION

- A. Install materials in accordance with manufacturer's installation instructions.
- B. Fluid-Applied Membranes:
 1. Prepare substrate in accordance with coating manufacturer's installation instructions; treat joints in substrate and between dissimilar materials as indicated.
 2. Apply flashing to seal with adjacent construction and to bridge joints in coating substrate.
- C. Openings and Penetrations in Exterior Water-Resistive Barriers:
 1. Install flashing over sills, covering entire sill framing member, and extend at least 5 inches onto water-resistive barrier and at least 6 inches up jambs; mechanically fasten stretched edges.
 2. At openings filled with frames having nailing flanges, seal head and jamb flanges using a continuous bead of sealant compressed by flange and cover flanges with sealing tape at least 4 inches wide; do not seal sill flange.
 3. At openings filled with nonflanged frames, seal water-resistive barrier to each side of framing at opening using flashing at least 9 inches wide, and covering entire depth of framing.
 4. At head of openings, install flashing under water-resistive barrier extending at least 2 inches beyond face of jambs; seal water-resistive barrier to flashing.
 5. At interior face of openings, seal gaps between window and door frames and rough framing using appropriate joint sealant over backer rod.
 6. Service and Other Penetrations: Form flashing around penetrating items and seal to surface of water-resistive barrier.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements for additional requirements.

3.05 PROTECTION

- A. Do not leave materials exposed to weather longer than recommended by manufacturer.

END OF SECTION

This page intentionally left blank

**SECTION 07 4213.13
METAL WALL PANELS - MBCI**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Manufactured metal exterior wall panels.

1.02 RELATED REQUIREMENTS

- A. Section 06 1000 - Rough Carpentry: Wall panel substrate.
- B. Section 07 2500 - Weather Barriers: Weather barrier under wall panels.

1.03 REFERENCE STANDARDS

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Shop Drawings: Indicate dimensions, layout, joints, construction details, support clips, _____, and anchorage methods.
- C. Samples: Submit two samples of wall panel and soffit panel, 12 by 12 inches in size illustrating finish color, sheen, and texture.
- D. Warranty Documentation for Installation of Building Rainscreen Assembly: Submit installer warranty and ensure forms have been completed in Owner's name and registered with installer.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Protect panels from accelerated weathering by removing or venting sheet plastic shipping wrap.
- B. Store prefinished material off the ground and protected from weather; prevent twisting, bending, or abrasion; provide ventilation; slope metal sheets to ensure proper drainage.
- C. Prevent contact with materials that cause discoloration or staining of products.

1.06 FIELD CONDITIONS

- A. Do not install wall panels when air temperature or relative humidity is outside manufacturer's limits.

1.07 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Metal Wall Panels - Exposed Fasteners:
 - 1. MBCI, a Cornerstone Building Brands Company; Corrugated Panel: www.mbc.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.
- B. Metal Wall Panels - Concealed Fasteners:
 - 1. MBCI, a Cornerstone Building Brands Company; Designer Series 16.0 Fluted Panel: www.mbc.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PERFORMANCE REQUIREMENTS

- A. Metal Wall Panels: Provide exterior wall panels.
 - 1. Provide components to support assembly dead loads and to withstand live loads caused by positive and negative wind pressure acting normally to plane of wall.
 - 2. Maximum Allowable Deflection of Panel: L/180 for length (L) of span.
 - 3. Movement:

- a. Accommodate movement within system without damage to components or deterioration of seals
- b. Accommodate movement between system and perimeter components when subject to 100 degrees F temperature cycling.
- c. Accommodate dynamic loading and release of loads on system, as well as deflection of structural support framing.
4. Drainage: Provide positive drainage to exterior for moisture entering or condensation occurring within panel system.
5. Fabrication: Formed true to shape, accurate in size, square, and free from distortion or defects; select pieces of longest practical lengths.

2.03 METAL WALL PANEL SYSTEM

- A. Wall Panel System: Factory-fabricated, prefinished metal panel system; site assembled.
- B. Exterior Wall Panels:
 1. Profile: Vertical and horizontal, as indicated; style as indicated.
 2. Side Seams: Double-interlocked, tight-fitting, sealed with continuous gaskets.
 3. Material: Precoated steel sheet, 29-gauge, 0.014-inch minimum thickness.
 4. Panel Width: 24 inches.
 5. Color: As indicated on drawings.
- C. Trim: Same material, thickness, and finish as exterior sheets; brake-form to required profiles.

2.04 ATTACHMENT SYSTEM

- A. Concealed System: Provide manufacturer's standard stainless steel concealed anchor clips designed for specific wall panel system and engineered to meet performance requirements, including anticipated thermal movement.

2.05 FABRICATION

- A. Panels: Provide factory- or field-fabricated panels with applied finish and accessory items, using manufacturer's standard processes as required to achieve specified appearance and performance requirements.
- B. Joints: Provide captive gaskets, sealants, or separator strips at panel joints to ensure weathertight seals, eliminate metal-to-metal contact, and minimize noise from panel movements.

2.06 MATERIALS

- A. Precoated Steel Sheet: Hot-dip galvanized steel sheet, ASTM A653/A653M, Structural Steel (SS) or Forming Steel (FS), with G90/Z275 coating; continuous-coil coated on exposed surfaces with specified finish coating and on panel back with specified panel back coating.

2.07 ACCESSORIES

- A. Gaskets: Manufacturer's standard type suitable for use with system, permanently resilient; ultraviolet and ozone resistant.
- B. Fasteners: Manufacturer's standard type to suit application; with soft neoprene washers, steel, hot-dip galvanized. Fastener cap same color as exterior panel.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify building framing members are ready to receive panels.

3.02 PREPARATION

- A. Install sub-girts perpendicular to panel length, securely fastened to substrates and shimmed and leveled to uniform plane, and spaced at intervals indicated.
- B. Protect surrounding areas and adjacent surfaces from damage during execution of this work.

3.03 INSTALLATION

- A. Install panels on walls in accordance with manufacturer's instructions.
- B. Protect surfaces in contact with cementitious materials and dissimilar metals with bituminous paint; allow to dry prior to wall panel installation.
- C. Fasten panels to structural supports; align, level, and plumb.
- D. Locate joints over supports.
- E. Lap panel ends 2 inches, minimum.
- F. Use concealed fasteners unless otherwise indicated by Architect.
- G. Seal and place gaskets to prevent weather penetration. Maintain neat appearance.

3.04 TOLERANCES

3.05 CLEANING

- A. Remove site cuttings from finish surfaces.
- B. Remove protective material from wall panel surfaces.

3.06 PROTECTION

- A. Protect metal wall panels until completion of project.
- B. Touch up, repair, or replace damaged wall panels or accessories before Date of Substantial Completion.

END OF SECTION

This page intentionally left blank

**SECTION 07 6200
SHEET METAL FLASHING AND TRIM**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fabricated sheet metal items, including flashings, counterflashings, and parapet coping/cap flashings.
- B. Sealants for joints within sheet metal fabrications.

1.02 REFERENCE STANDARDS

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.
- B. ASTM A755/A755M - Standard Specification for Steel Sheet, Metallic Coated by the Hot-Dip Process and Prepainted by the Coil-Coating Process for Exterior Exposed Building Products; 2018 (Reapproved 2024).
- C. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2018 (Reapproved 2024).
- D. ASTM D226/D226M - Standard Specification for Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing; 2025.
- E. SMACNA (ASMM) - Architectural Sheet Metal Manual; 2012.

1.03 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.
- C. Samples: Submit two samples, ___ by ___ inches in size, illustrating metal finish color.

1.04 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA (ASMM) requirements and standard details, except as otherwise indicated.
- B. Fabricator and Installer Qualifications: Company specializing in sheet metal work with 3 years of documented experience.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

PART 2 PRODUCTS

2.01 PREPAINTED, METALLIC-COATED STEEL SHEETS

- A. Description: Factory-applied coatings applied to metallic-coated steel sheet substrates prior to fabrication by coil coating; topcoat systems consist of primers and organic topcoats on exposed, top side of sheet; washcoats on bottom, unexposed sheet side.
- B. Comply with ASTM A755/A755M.
- C. Metallic-Coated Steel Sheet Substrates:
 - 1. Zinc-Coated, Galvanized, Steel Sheets: Commercial steel sheets, galvanized by hot-dip process; comply with ASTM A653/A653M; coating designation G90.
- D. Substrate Preparation for Prefinishing: Clean and prepare substrate surfaces in accordance with coating manufacturer's recommendations for substrate type and application.
- E. Washcoats or Backercoats: Provide washcoats or backercoats in accordance with organic coating manufacturer's recommendations.

- F. Primer Coats: Provide basecoat primers in accordance with coating manufacturer's recommendations for substrate type, topcoat, and application.

2.02 FABRICATION

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Form pieces in longest possible lengths.
- C. Hem exposed edges on underside 1/2 inch; miter and seam corners.
- D. Form material with standing seams, except where otherwise indicated; at moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- E. Fabricate corners from one piece with minimum 18-inch long legs; seam for rigidity, seal with sealant.
- F. Fabricate vertical faces with bottom edge formed outward 1/4 inch and hemmed to form drip.
- G. Fabricate flashings to allow toe to extend 2 inches over roofing _____. Return and brake edges.

2.03 ACCESSORIES

- A. Fasteners: Galvanized steel, with soft neoprene washers.
- B. Underlayment: ASTM D226/D226M, organic roofing felt, Type I, No. 15.
- C. Primer Type: Zinc chromate.
- D. Concealed Sealants: Non-curing butyl sealant.
- E. Exposed Sealants: ASTM C920; elastomeric sealant, with minimum movement capability as recommended by manufacturer for substrates to be sealed; color to match adjacent material.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, and vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Back paint concealed metal surfaces with protective backing paint to a minimum dry film thickness of 15 mil, 0.015 inch.

3.03 INSTALLATION

- A. Insert flashings into reglets to form tight fit; secure in place with lead wedges; pack remaining spaces with lead wool; seal flashings into reglets with sealant.
- B. Secure flashings in place using concealed fasteners, and use exposed fasteners only where permitted.
- C. Apply plastic cement compound between metal flashings and felt flashings.
- D. Fit flashings tight in place; make corners square, surfaces true and straight in planes, and lines accurate to profiles.
- E. Seal metal joints watertight.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements for field inspection requirements.
- B. Inspection will involve surveillance of work during installation to ascertain compliance with specified requirements.

END OF SECTION

**SECTION 08 1113
HOLLOW METAL FRAMES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Hollow metal frames for wood doors.

1.02 RELATED REQUIREMENTS

- A. Section 08 7100 - Door Hardware.
- B. Section 09 9123 - Interior Painting: Field painting.

1.03 ABBREVIATIONS AND ACRONYMS

- A. ANSI: American National Standards Institute.
- B. HMMA: Hollow Metal Manufacturers Association.
- C. NFPA: National Fire Protection Association.
- D. SDI: Steel Door Institute.
- E. UL: Underwriters Laboratories.

1.04 REFERENCE STANDARDS

- A. ADA Standards - 2010 ADA Standards for Accessible Design; 2010.
- B. ANSI/SDI A250.4 - Test Procedure and Acceptance Criteria for Physical Endurance for Steel Doors, Frames and Frame Anchors; 2026.
- C. ANSI/SDI A250.8 - Specifications for Standard Steel Doors and Frames (SDI-100); 2023.
- D. ANSI/SDI A250.10 - Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors and Frames; 2025.
- E. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.
- F. ASTM A1008/A1008M - Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable; 2026.
- G. ASTM A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength; 2025.
- H. ASTM C143/C143M - Standard Test Method for Slump of Concrete; 2026a.
- I. ASTM C476 - Standard Specification for Grout for Masonry; 2023.
- J. BHMA A156.115 - Hardware Preparation in Steel Doors and Frames; 2016.
- K. ICC A117.1 - Accessible and Usable Buildings and Facilities; 2017.
- L. NAAMM HMMA 830 - Hardware Selection for Hollow Metal Doors and Frames; 2002.
- M. NAAMM HMMA 831 - Hardware Locations for Hollow Metal Doors and Frames; 2024.
- N. NAAMM HMMA 840 - Guide Specifications for Receipt, Storage and Installation of Hollow Metal Doors and Frames; 2024.

1.05 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Materials and details of design and construction, hardware locations, reinforcement type and locations, anchorage and fastening methods, and finishes.
 - 1. **NOTE:** On doors receiving exit devices no universal preps are allowed and the doors shall be prepared specifically for the exit device functions as scheduled.

- C. Shop Drawings: Details of each opening, showing elevations, glazing, frame profiles, and any indicated finish requirements.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than three years documented experience.
- B. Maintain at project site copies of reference standards relating to installation of products specified.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Comply with NAAMM HMMA 840 or ANSI/SDI A250.8 (SDI-100) in accordance with specified requirements.
- B. Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion and adverse effects on factory applied painted finish.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Hollow Metal Doors and Frames:
 - 1. Ceco Door, an Assa Abloy Group company; None - N/A: www.assaabloydss.com/#sle.
 - 2. Curries, an Assa Abloy Group company; None - N/A: www.assaabloydss.com/#sle.
 - 3. Fleming Door Products, an Assa Abloy Group company; None - N/A: www.assaabloydss.com/#sle.
 - 4. Republic Doors, an Allegion brand; None - N/A: www.republicdoor.com/#sle.
 - 5. Steelcraft, an Allegion brand; None - N/A: www.allegion.com/#sle.
 - 6. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PERFORMANCE REQUIREMENTS

- A. Requirements for Hollow Metal Doors and Frames:
 - 1. Steel Sheet: Comply with one or more of the following requirements; galvanized steel complying with ASTM A653/A653M, cold-rolled steel complying with ASTM A1008/A1008M, or hot-rolled pickled and oiled (HRPO) steel complying with ASTM A1011/A1011M, commercial steel (CS) Type B, for each.
 - 2. Accessibility: Comply with ICC A117.1 and ADA Standards.
 - 3. Exterior Door Top Closures: Flush end closure channel, with top and door faces aligned.
 - 4. Door Edge Profile: Manufacturers standard for application indicated.
 - 5. Typical Door Face Sheets: Flush.
 - 6. Glazed Lights: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings. Style: Manufacturer's standard.
 - 7. Hardware Preparations, Selections and Locations: Comply with NAAMM HMMA 830 and NAAMM HMMA 831 or BHMA A156.115 and ANSI/SDI A250.8 (SDI-100) in accordance with specified requirements.
 - 8. Zinc Coating for Typical Interior and/or Exterior Locations: Provide metal components zinc-coated (galvanized) and/or zinc-iron alloy-coated (galvanized) by the hot-dip process in accordance with ASTM A653/A653M, with manufacturer's standard coating thickness, unless noted otherwise for specific hollow metal doors and frames.
- B. Combined Requirements: If a particular door and frame unit is indicated to comply with more than one type of requirement, comply with the specified requirements for each type; for instance, an exterior door that is also indicated as being sound-rated must comply with the requirements specified for exterior doors and for sound-rated doors; where two requirements conflict, comply with the most stringent.

2.03 HOLLOW METAL FRAMES

- A. Comply with standards and/or custom guidelines as indicated for corresponding door in accordance with applicable door frame requirements.

- B. Frame Finish: Factory primed and field finished.
- C. Frames for Wood Doors: Comply with frame requirements in accordance with corresponding door.
- D. Provide mortar guard boxes for hardware cut-outs in frames to be installed in masonry or to be grouted.
- E. Frames in Masonry Walls: Size to suit masonry coursing with head member 4 inches high to fill opening without cutting masonry units.

2.04 FINISHES

- A. Primer: Rust-inhibiting, complying with ANSI/SDI A250.10, door manufacturer's standard.
- B. Bituminous Coating: Cold-applied asphalt mastic, compounded for 15 mil, 0.015 inch dry film thickness (DFT) per coat; provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.

2.05 ACCESSORIES

- A. Removable Stops: Rolled steel bar, shape as indicated on drawings, mitered or butted corners; prepared for countersink style tamper proof screws.
- B. Grout for Frames: Mortar grout complying with ASTM C476 with maximum slump of 4 inches as measured in accordance with ASTM C143/C143M for hand troweling in place; plaster grout and thinner pumpable grout are prohibited.
- C. Silencers: Resilient rubber, fitted into drilled hole; provide three on strike side of single door, three on center mullion of pairs, and two on head of pairs without center mullions.
- D. Temporary Frame Spreaders: Provide for factory- or shop-assembled frames.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- C. Verify that finished walls are in plane to ensure proper door alignment.

3.02 PREPARATION

- A. Coat inside of frames to be installed in masonry or to be grouted, with bituminous coating, prior to installation.

3.03 INSTALLATION

- A. Install doors and frames in accordance with manufacturer's instructions and related requirements of specified door and frame standards or custom guidelines indicated.
- B. Coordinate frame anchor placement with wall construction.
- C. Grout frames in masonry construction, using hand trowel methods; brace frames so that pressure of grout before setting will not deform frames.
- D. Install door hardware as specified in Section 08 7100.
- E. Coordinate installation of electrical connections to electrical hardware items.

3.04 ADJUSTING

- A. Adjust for smooth and balanced door movement.

3.05 SCHEDULE

- A. Refer to Door and Frame Schedule on the drawings.

END OF SECTION

This page intentionally left blank

**SECTION 08 1416
FLUSH WOOD DOORS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Flush wood doors; flush and flush glazed configuration; fire-rated and non-rated.
- B. **NOTE:** On doors receiving exit devices no universal preps are allowed and the doors shall be prepared specifically for the exit device functions as scheduled.

1.02 RELATED REQUIREMENTS

- A. Section 08 1113 - Hollow Metal Frames.
- B. Section 08 7100 - Door Hardware.
- C. Section 08 8000 - Glazing.

1.03 REFERENCE STANDARDS

- A. AWI (QCP) - Quality Certification Program; Current Edition.
- B. AWI/AWMAC/WI (AWS) - Architectural Woodwork Standards, 2nd Edition; 2014, with Errata (2016).
- C. AWMAC/WI (NAAWS) - North American Architectural Woodwork Standards; 2021, with Errata.
- D. NFPA 80 - Standard for Fire Doors and Other Opening Protectives; 2025, with Amendment (2024).
- E. UL 10C - Standard for Positive Pressure Fire Tests of Door Assemblies; Current Edition, Including All Revisions.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Indicate door core materials and construction; veneer species, type and characteristics.
- C. Shop Drawings: Show doors, elevations, sizes, types, swings, undercuts, beveling, blocking for hardware, factory machining, factory finishing, cutouts for glazing and other details.
 - 1. Provide information as required by AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS).
 - 2. **NOTE:** On doors receiving exit devices no universal preps are allowed and the doors shall be prepared specifically for the exit device functions as scheduled.
- D. Samples: Submit two samples of door veneer, 6 x 6 inch in size illustrating wood grain, stain color, and sheen.
- E. Test Reports: Show compliance with specified requirements for the following:
 - 1. Fire ratings for fire doors
- F. Warranty, executed in Owner's name.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section, with not less than three years of documented experience.
 - 1. Accredited participant in the specified certification program prior to the commencement of fabrication and throughout the duration of the project.
- B. Installer Qualifications: Company specializing in performing work of the type specified in this section, with not less than three years of documented experience.
- C. Woodwork Quality Assurance Program:
 - 1. Comply with AWI (QCP) woodwork association quality assurance service/program in accordance with requirements for work specified in this section; www.awiqcp.org/#sle.
 - 2. Provide labels indicating that the installed work complies with AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS) requirements for grade or grades specified.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Package, deliver and store doors in accordance with specified quality standard.
- B. Accept doors on site in manufacturer's packaging, and inspect for damage.
- C. Protect doors with resilient packaging sealed with heat shrunk plastic; do not store in damp or wet areas or areas where sunlight might bleach veneer; seal top and bottom edges with tinted sealer if stored more than one week, and break seal on site to permit ventilation.

1.07 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Wood Veneer Faced Doors:
 - 1. Eggers Industries: www.eggersindustries.com/#sle.
 - 2. Graham Wood Doors: www.grahamdoors.com/#sle.
 - 3. VT Industries, Inc; www.vtindustries.com.
 - 4. Weyerhaeuser; www.weyerhaeuser.com
 - 5. Substitutions: See Section 01 6000 - Product Requirements.

2.02 DOORS AND PANELS

- A. Doors: See drawings for locations and additional requirements.
 - 1. Quality Standard: Premium Grade, Extra Heavy Duty performance, in accordance with AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS), unless noted otherwise.
 - 2. Wood Veneer Faced Doors: 5-ply or 7-ply unless otherwise indicated.
- B. Interior Doors: 1-3/4 inches thick unless otherwise indicated; flush construction.
 - 1. Provide solid core doors at each location.
 - 2. Fire Rated Doors: Tested to ratings indicated on drawings in accordance with UL 10C - Positive Pressure; Underwriters Laboratories Inc (UL) or Intertek/Warnock Hersey (WHI) labeled without any visible seals when door is open.
 - 3. Wood veneer facing with factory transparent finish as indicated on drawings.

2.03 DOOR AND PANEL CORES

- A. Non-Rated Solid Core and 20 Minute Rated Doors: Type particleboard core (PC), plies and faces as indicated.

2.04 DOOR FACINGS

- A. Veneer Facing for Transparent Finish: Red oak, veneer grade in accordance with quality standard indicated, plain sliced (flat cut), with book match between leaves of veneer, running match of spliced veneer leaves assembled on door or panel face; wood grain to run horizontally.

2.05 DOOR CONSTRUCTION

- A. Fabricate doors in accordance with door quality standard specified.
- B. Cores Constructed with stiles and rails:
- C. Glazed Openings: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings.
- D. Factory machine doors for hardware other than surface-mounted hardware, in accordance with hardware requirements and dimensions.
- E. Factory fit doors for frame opening dimensions identified on shop drawings, with edge clearances in accordance with specified quality standard.
- F. Provide edge clearances in accordance with the quality standard specified.

2.06 FINISHES - WOOD VENEER DOORS

- A. Factory finish doors in accordance with approved sample.

2.07 ACCESSORIES

- A. Hollow Metal Door Frames: See Section 08 1113.
- B. Glazing: See Section 08 8000.
- C. Glazing Stops: Wood with metal clips for rated doors, butted corners; prepared for countersink style tamper proof screws.
- D. Door Hardware: See Section 08 7100.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- C. Do not install doors in frame openings that are not plumb or are out-of-tolerance for size or alignment.

3.02 INSTALLATION

- A. Install doors in accordance with manufacturer's instructions and specified quality standard.
 - 1. Install fire-rated doors in accordance with NFPA 80 requirements.
- B. Factory-Finished Doors: Do not field cut or trim; if fit or clearance is not correct, replace door.
- C. Use machine tools to cut or drill for hardware.
- D. Coordinate installation of doors with installation of frames and hardware.
- E. Coordinate installation of glazing.

3.03 TOLERANCES

- A. Comply with specified quality standard for fit and clearance tolerances.
- B. Comply with specified quality standard for telegraphing, warp, and squareness.

3.04 ADJUSTING

- A. Adjust doors for smooth and balanced door movement.
- B. Adjust closers for full closure.

END OF SECTION

This page intentionally left blank

**SECTION 08 3100
ACCESS DOORS AND PANELS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Floor mounted access door and frame units, interior.

1.02 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate exact position of each access door and/or panel unit.
- C. Manufacturer's Installation Instructions: Indicate installation requirements.

1.03 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

PART 2 PRODUCTS

2.01 FLOOR MOUNTED ACCESS UNITS

- A. Manufacturers:
 - 1. Best Access Doors; STEEL FLOOR ACCESS DOOR: www.bestaccessdoors.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.
- B. Floor Mounted Access Units: Factory fabricated, fully assembled units with corner joints welded, filled, and ground flush; square and without rack or warp; coordinate requirements with type of installation assembly being used for each unit.
 - 1. Size: As indicated on drawings.
 - 2. Hardware: Steel, hot-dipped galvanized.
 - a. Hinges: Removable pin.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that rough openings are correctly sized and located.
- B. Begin installation only after substrates have been properly prepared, and if the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.02 PREPARATION

- A. Clean surfaces thoroughly prior to proceeding with this work.
- B. Prepare surfaces using methods recommended by manufacturer for applicable substrates in accordance with project conditions.

3.03 INSTALLATION

- A. Install units in accordance with manufacturer's instructions.
- B. Install frames plumb and level in openings, and secure units rigidly in place.
- C. Position units to provide convenient access to concealed equipment when necessary.

END OF SECTION

This page intentionally left blank

**SECTION 08 5400
COMPOSITE WINDOWS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Factory fabricated composite windows with fixed sash.
- B. Insect screens.

1.02 RELATED REQUIREMENTS

- A. Section 07 9200 - Joint Sealants: Sealing joints between frames and adjacent construction.
- B. Section 08 8000 - Glazing.

1.03 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide component dimensions, anchorage and fasteners, glass, internal drainage details, and _____.
- C. Submit two samples ____ by ____ inches in size illustrating window frame section, mullion section, screen and frame, factory finished surfaces, glazing, infill panels, glazing materials, and _____.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Protect finished surfaces with wrapping. Do not use adhesive papers or sprayed coatings that bond when exposed to sunlight or weather.
- B. Jig, brace, and box the window frame assemblies for transport to minimize flexing of members or joints.

1.05 FIELD CONDITIONS

- A. Do not install sealants when ambient temperature is less than 40 degrees F.
- B. Maintain this minimum temperature during and after installation of sealants.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Composite Windows:
 - 1. Andersen Windows, Inc; 100 Series Casement Window:
www.andersenwindows.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 COMPOSITE WINDOW UNITS

- A. Composite Windows: Hollow, extruded composite material consisting of 40 percent wood fiber and 60 percent thermoplastic polymer by weight; factory fabricated; with vision glass, related flashings, anchorage and attachment devices.
 - 1. Interior Color: White.
 - 2. Exterior Color: As selected by Architect from manufacturer's standard line.
 - 3. Frame Depth: 3-1/4 inch, minimum.
 - 4. Frame Joining System: Attachment system for horizontal and vertical multiple window frames in compliance with designated project requirements.
 - a. Joining Strip: Kerfed and reinforced fiberglass strip, 3-11/64 inch wide by 1/2 inch thick for applying interior and exterior vinyl trim, end plugs, flange and gusset gasket, and galvanized steel gusset plates.
 - b. Vinyl trim color to match exposed frame colors.
 - c. Fasteners: Corrosion resistant screws as recommended by manufacturer for required applications.
 - 5. Glass Stops: Same material and color as frame, sloped for wash, factory applied.

2.03 COMPONENTS

- A. Frames: ____ inch wide by ____ inch deep profile; flush glass stops of screw fastened type.
 - 1. Type: Nailing flange (for new windows).
 - 2. Frame Corners: Mitered and joined with nylon corner locks.
- B. Fasteners: Stainless steel.

2.04 GLASS AND GLAZING MATERIALS

- A. Glass and Glazing Materials: See Section 08 8000 for types as indicated.

2.05 FABRICATION

- A. Factory fabricate framing, mullions and sash members with rigid corners and joints. Supplement frame sections with internal reinforcement where required for structural rigidity.
- B. Form sills and stools in one piece. Slope sills for wash.
- C. Fabricate components with minimum clearances and shim spacing around perimeter of window assembly, and allowing for installation and dynamic movement of perimeter seal.
- D. Arrange fasteners to be concealed from view.
- E. Permit internal drainage weep holes and channels to migrate moisture to exterior. Provide internal drainage of glazing spaces to exterior through weep holes.
- F. Factory glaze window units.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install composite window units in accordance with manufacturer's instructions.
- B. Attach window frame and shims to perimeter of opening to accommodate construction tolerances and other irregularities.
- C. Align window plumb and level, free of warp or twist. Maintain dimensional tolerances and alignment with adjacent work.

3.02 TOLERANCES

- A. Maximum Variation from Level or Plumb: 1/16 inch per 3 ft or 1/2 inch per 100 ft, non-cumulative, whichever is less.

3.03 CLEANING

- A. Remove protective material from pre-finished surfaces.
- B. Wash surfaces by method recommended and acceptable to window manufacturer; rinse and wipe surfaces clean.
- C. Remove excess glazing sealant by moderate use of mineral spirits or other solvent acceptable to sealant manufacturer.

END OF SECTION

**SECTION 08 7100
DOOR HARDWARE**

PART 1 GENERAL

1.01 REFERENCE STANDARDS

- A. ANSI/SDI A250.8 - Specifications for Standard Steel Doors and Frames (SDI-100); 2023.
- B. BHMA A156.1 - Standard for Butts and Hinges; 2025.
- C. BHMA A156.2 - Bored and Preamsembled Locks and Latches; 2022.
- D. BHMA A156.3 - Exit Devices; 2025.
- E. BHMA A156.4 - Door Closers and Pivots; 2024.
- F. BHMA A156.5 - Cylinders and Input Devices for Locks; 2020.
- G. BHMA A156.19 - Power Assist and Low Energy Power Operated Swinging Doors; 2019.
- H. BHMA A156.26 - Standard for Continuous Hinges; 2025.
- I. BHMA A156.28 - Standard for Recommended Practices for Mechanical Keying Systems; 2023.
- J. BHMA A156.31 - Electric Strikes and Frame Mounted Actuators; 2024.
- K. ISO 9000 - Quality Management — Fundamentals and Vocabulary; 2026.
- L. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- M. NFPA 80 - Standard for Fire Doors and Other Opening Protectives; 2025, with Amendment (2024).
- N. NFPA 101 - Life Safety Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- O. NFPA 105 - Standard for Smoke Door Assemblies and Other Opening Protectives; 2025.
- P. NFPA 252 - Standard Methods of Fire Tests of Door Assemblies; 2022.
- Q. UL 10B - Standard for Fire Tests of Door Assemblies; Current Edition, Including All Revisions.
- R. UL 10C - Standard for Positive Pressure Fire Tests of Door Assemblies; Current Edition, Including All Revisions.
- S. UL 305 - Standard for Panic Hardware; Current Edition, Including All Revisions.
- T. UL 1784 - Standard for Air Leakage Tests of Door Assemblies and Other Opening Protectives; Current Edition, Including All Revisions.
- U. WDMA I.S. 1A - Interior Architectural Wood Flush Doors; 2021, with Errata (2022).

1.02 SUMMARY

- A. Section includes:
 - 1. Mechanical door hardware
- B. Section excludes:
 - 1. Windows
 - 2. Cabinets (casework), including locks in cabinets
 - 3. Signage
 - 4. Toilet accessories
 - 5. Overhead doors
- C. Related Sections:
 - 1. Division 01 "General Requirements" sections for Allowances, Alternates, Owner Furnished Contractor Installed, Project Management and Coordination.
 - 2. Division 06 Section "Rough Carpentry"
 - 3. Division 06 Section "Finish Carpentry"

4. Division 07 Section "Joint Sealants" for sealant requirements applicable to threshold installation specified in this section.
5. Division 08 Sections:
 - a. "Metal Doors and Frames"
 - b. "Flush Wood Doors"
 - c. "Stile and Rail Wood Doors"
 - d. "Interior Aluminum Doors and Frames"
 - e. "Aluminum-Framed Entrances and Storefronts"
 - f. "Stainless Steel Doors and Frames"
 - g. "Special Function Doors"
 - h. "Entrances"
6. Division 26 "Electrical" sections for connections to electrical power system and for low-voltage wiring.
7. Division 28 "Electronic Safety and Security" sections for coordination with other components of electronic access control system and fire alarm system.

1.03 REFERENCES

- A. UL LLC
 1. UL 10B - Fire Test of Door Assemblies
 2. UL 10C - Positive Pressure Test of Fire Door Assemblies
 3. UL 1784 - Air Leakage Tests of Door Assemblies
 4. UL 305 - Panic Hardware
- B. DHI - Door and Hardware Institute
 1. Sequence and Format for the Hardware Schedule
 2. Recommended Locations for Builders Hardware
 3. Keying Systems and Nomenclature
 4. Installation Guide for Doors and Hardware
- C. NFPA – National Fire Protection Association
 1. NFPA 70 – National Electric Code
 2. NFPA 80 – Standard for Fire Doors and Other Opening Protectives
 3. NFPA 101 – Life Safety Code
 4. NFPA 105 – Smoke and Draft Control Door Assemblies
 5. NFPA 252 – Fire Tests of Door Assemblies
- D. ANSI - American National Standards Institute
 1. ANSI A117.1 – 2017 Edition – Accessible and Usable Buildings and Facilities
 2. ANSI/BHMA A156.1 - A156.29, and ANSI/BHMA A156.31 - Standards for Hardware and Specialties
 3. ANSI/BHMA A156.28 - Recommended Practices for Keying Systems
 4. ANSI/WDMA I.S. 1A - Interior Architectural Wood Flush Doors
 5. ANSI/SDI A250.8 - Standard Steel Doors and Frames

1.04 SUBMITTALS

- A. General:
 1. Submit in accordance with Conditions of Contract and Division 01 Submittal Procedures.
 2. Prior to forwarding submittal:
 - a. Review drawings and Sections from related trades to verify compatibility with specified hardware.
 - b. Highlight, encircle, or otherwise specifically identify on submittals: deviations from Contract Documents, issues of incompatibility or other issues which may detrimentally affect the Work.
- B. Action Submittals:

1. Product Data: Submit technical product data for each item of door hardware, installation instructions, maintenance of operating parts and finish, and other information necessary to show compliance with requirements.
 2. Door Hardware Schedule:
 - a. Submit concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate fabrication of other work critical in Project construction schedule.
 - b. Submit with hardware sets in vertical format as illustrated by Sequence of Format for the Hardware Schedule published by DHI.
 - c. Indicate complete designations of each item required for each opening, include:
 - 1) Door Index: door number, heading number, and Architect's hardware set number.
 - 2) Quantity, type, style, function, size, and finish of each hardware item.
 - 3) Name and manufacturer of each item.
 - 4) Fastenings and other pertinent information.
 - 5) Location of each hardware set cross-referenced to indications on Drawings.
 - 6) Explanation of all abbreviations, symbols, and codes contained in schedule.
 - 7) Mounting locations for hardware.
 - 8) Door and frame sizes and materials.
 - 9) Degree of door swing and handing.
 - 10) Operational Description of openings with electrified hardware covering egress, ingress (access), and fire/smoke alarm connections.
 3. Key Schedule:
 - a. After Keying Conference, provide keying schedule that includes levels of keying, explanations of key system's function, key symbols used, and door numbers controlled.
 - b. Use ANSI/BHMA A156.28 "Recommended Practices for Keying Systems" as guideline for nomenclature, definitions, and approach for selecting optimal keying system.
 - c. Provide 3 copies of keying schedule for review prepared and detailed in accordance with referenced DHI publication. Include schematic keying diagram and index each key to unique door designations.
 - d. Index keying schedule by door number, keyset, hardware heading number, cross keying instructions, and special key stamping instructions.
 - e. Provide one complete bitting list of key cuts and one key system schematic illustrating system usage and expansion. Forward bitting list, key cuts and key system schematic directly to Owner, by means as directed by Owner.
 - f. Prepare key schedule by or under supervision of supplier, detailing Owner's final keying instructions for locks.
- C. Informational Submittals:
1. Provide Qualification Data for Supplier, Installer and Architectural Hardware Consultant.
 2. Provide Product Data:
 - a. Certify that door hardware approved for use on types and sizes of labeled fire-rated doors complies with listed fire-rated door assemblies.
 - b. Include warranties for specified door hardware.
- D. Closeout Submittals:
1. Operations and Maintenance Data: Provide in accordance with Division 01 and include:
 - a. Complete information on care, maintenance, and adjustment; data on repair and replacement parts, and information on preservation of finishes.
 - b. Catalog pages for each product.
 - c. Final approved hardware schedule edited to reflect conditions as installed.
 - d. Final keying schedule

- e. Copy of warranties including appropriate reference numbers for manufacturers to identify project.

1.05 QUALITY ASSURANCE

- A. Qualifications and Responsibilities:
 - 1. Supplier: Recognized architectural hardware supplier with a minimum of 5 years documented experience supplying both mechanical and electromechanical door hardware similar in quantity, type, and quality to that indicated for this Project. Supplier to be recognized as a factory direct distributor by the manufacturer of the primary materials with a warehousing facility in the Project's vicinity. Supplier to have on staff, a certified Architectural Hardware Consultant (AHC) or Door Hardware Consultant (DHC) available to Owner, Architect, and Contractor, at reasonable times during the Work for consultation.
 - 2. Installer: Qualified tradesperson skilled in the application of commercial grade hardware with experience installing door hardware similar in quantity, type, and quality as indicated for this Project.
 - 3. Single Source Responsibility: Obtain each type of door hardware from single manufacturer.
- B. Pre-Installation Meetings
 - 1. Keying Conference
 - a. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including:
 - 1) Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
 - 2) Preliminary key system schematic diagram.
 - 3) Requirements for key control system.
 - 4) Requirements for access control.
 - 5) Address for delivery of keys.
 - 2. Pre-installation Conference
 - a. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 - b. Inspect and discuss preparatory work performed by other trades.
 - c. Inspect and discuss electrical roughing-in for electrified door hardware.
 - d. Review sequence of operation for each type of electrified door hardware.
 - e. Review required testing, inspecting, and certifying procedures.
 - f. Review questions or concerns related to proper installation and adjustment of door hardware.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for hardware delivered to Project site. Promptly replace products damaged during shipping
- B. Tag each item or package separately with identification coordinated with final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package. Deliver each article of hardware in manufacturer's original packaging.
- C. Maintain manufacturer-recommended environmental conditions throughout storage and installation periods.
- D. Provide secure lock-up for door hardware delivered to Project. Control handling and installation of hardware items so that completion of Work will not be delayed by hardware losses both before and after installation.
- E. Handle hardware in manner to avoid damage, marring, or scratching. Correct, replace or repair products damaged during Work. Protect products against malfunction due to paint, solvent, cleanser, or any chemical agent.

1.07 COORDINATION

- A. Coordinate layout and installation of floor-recessed door hardware with floor construction. Cast anchoring inserts into concrete.
- B. Installation Templates: Distribute for doors, frames, and other work specified to be factory or shop prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- C. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- D. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

1.08 WARRANTY

- A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within published warranty period.
 - 1. Warranty does not cover damage or faulty operation due to improper installation, improper use or abuse.
 - 2. Warranty Period: Beginning from date of Substantial Completion, for durations indicated in manufacturer's published listings.

1.09 MAINTENANCE

- A. Turn over unused materials to Owner for maintenance purposes.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Approval of alternate manufacturers and/or products other than those listed as "Scheduled Manufacturer" or "Acceptable Manufacturers" in the individual article for the product category are only to be considered by official substitution request in accordance with section 01 25 00.
- B. Approval of products from manufacturers indicated in "Acceptable Manufacturers" is contingent upon those products providing all functions and features and meeting all requirements of scheduled manufacturer's product.
- C. Where specified hardware is not adaptable to finished shape or size of members requiring hardware, furnish suitable types having same operation and quality as type specified, subject to Architect's approval.

2.02 MATERIALS

- A. Fabrication
 - 1. Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. provide screws according to manufacturer's recognized installation standards for application intended.
 - 2. Finish exposed screws to match hardware finish, or, if exposed in surfaces of other work, to match finish of this other work including prepared for paint surfaces to receive painted finish.
 - 3. Provide concealed fasteners wherever possible for hardware units exposed when door is closed. Coordinate with "Metal Doors and Frames", "Flush Wood Doors", "Stile and Rail Wood Doors" to ensure proper reinforcements. Advise the Architect where visible fasteners, such as thru bolts, are required.
- B. Provide screws, bolts, expansion shields, drop plates and other devices necessary for hardware installation.
 - 1. Where fasteners are exposed to view: Finish to match adjacent door hardware material.
- C. Cable and Connectors:
 - 1. Where scheduled in the hardware sets, provide each item of electrified hardware and wire harnesses with number and gage of wires enough to accommodate electric function of specified hardware.

2. Provide Molex connectors that plug directly into connectors from harnesses, electric locking and power transfer devices.
3. Provide through-door wire harness for each electrified locking device installed in a door and wire harness for each electrified hinge, electrified continuous hinge, electrified pivot, and electric power transfer for connection to power supplies.

2.03 HINGES

- A. Manufacturers and Products:
 1. Scheduled Manufacturer and Product:
 - a. Ives 5BB series
 2. Acceptable Manufacturers and Products:
 - a. McKinney TB series
 - b. Best FBB series
- B. Requirements:
 1. Provide hinges conforming to ANSI/BHMA A156.1.
 2. Provide five knuckle, ball bearing hinges.
 3. 1-3/4 inch thick doors, up to and including 36 inches wide:
 - a. Exterior: Standard weight, bronze or stainless steel, 4-1/2 inches high
 - b. Interior: Standard weight, steel, 4-1/2 inches high
 4. 1-3/4 inch thick doors over 36 inches wide:
 - a. Exterior: Heavy weight, bronze/stainless steel, 5 inches high
 - b. Interior: Heavy weight, steel, 5 inches high
 5. 2 inches or thicker doors:
 - a. Exterior: Heavy weight, bronze or stainless steel, 5 inches high
 - b. Interior: Heavy weight, steel, 5 inches high
 6. Adjust hinge width for door, frame, and wall conditions to allow proper degree of opening.
 7. Provide three hinges per door leaf for doors 90 inches or less in height, and one additional hinge for each 30 inches of additional door height.
 8. Where new hinges are specified for existing doors or existing frames, provide new hinges of identical size to hinge preparation present in existing door or existing frame.
 9. Hinge Pins: Except as otherwise indicated, provide hinge pins as follows:
 - a. Steel Hinges: Steel pins
 - b. Non-Ferrous Hinges: Stainless steel pins
 - c. Out-Swinging Exterior Doors: Non-removable pins
 - d. Out-Swinging Interior Lockable Doors: Non-removable pins
 - e. Interior Non-lockable Doors: Non-rising pins
 10. Provide hinges with electrified options as scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware. Locate electric hinge at second hinge from bottom or nearest to electrified locking component. Provide mortar guard for each electrified hinge specified.

2.04 CYLINDRICAL LOCKS – GRADE 1

- A. Manufacturers and Products:
 1. Scheduled Manufacturer and Product:
 - a. Schlage ND series
 2. Acceptable Manufacturers and Products:
 - a. Marks 195 Series
- B. Requirements:
 1. Provide cylindrical locks conforming to ANSI/BHMA A156.2 Series 4000, Grade 1, and UL Listed for 3-hour fire doors.
 2. Indicators: Where specified, provide escutcheon with lock status indicator window on top of lockset rose:
 - a. Escutcheon height (including rose) 6.05 inches high by 3.68 inches wide.

- b. Indicator window measuring a minimum 3.52-inch by .60 inch with 1.92 square-inches of front facing viewing area and 180-degree visibility with a total of .236 square-inches of total viewable area.
 - c. Provide snap-in serviceable window to prevent tampering. Lock must function if indicator is compromised.
 - d. Provide messages color-coded with full text and symbol, as scheduled, for easy visibility.
 - e. Unlocked and Unoccupied message will display on white background, and Locked and Occupied message will display on red background.
- 3. Cylinders: Refer to "KEYING" article, herein.
 - 4. Provide locks with standard 2-3/4 inches backset, unless noted otherwise, with 1/2-inch latch throw. Provide proper latch throw for UL listing at pairs.
 - 5. Provide locksets with separate anti-rotation thru-bolts, and no exposed screws.
 - 6. Provide independently operating levers with two external return spring cassettes mounted under roses to prevent lever sag.
 - 7. Provide standard ASA strikes unless extended lip strikes are necessary to protect trim.
 - 8. Provide electrified options as scheduled in the hardware sets.
 - 9. Lever Trim: Solid cast levers without plastic inserts and wrought roses on both sides.

2.05 CYLINDERS

- A. Manufacturers:
 - 1. Scheduled Manufacturer and Product:
 - a. Schlage (SC4)
 - 2. Acceptable Manufacturers and Products:
 - a. Substitutions by Architect approval only
- B. Requirements:
 - 1. Provide cylinders/cores to match Owner's existing key system, compliant with ANSI/BHMA A156.5; latest revision; cylinder face finished to match lockset, manufacturer's series as indicated. Refer to "KEYING" article, herein.

2.06 KEYING

- A. Scheduled System:
 - 1. Existing factory registered system:
 - a. Provide cylinders/cores keyed into Owner's existing factory registered keying system. Comply with guidelines in ANSI/BHMA A156.28, incorporating decisions made at keying conference.
- B. Requirements:
 - 1. Construction Keying:
 - a. Temporary Construction Cylinder Keying.
 - 1) Provide construction cores that permit voiding construction keys without cylinder removal, furnished in accordance with the following requirements.
 - (a) Split Key or Lost Ball Construction Keying System.
 - (b) 3 construction control keys, and extractor tools or keys as required to void construction keying.
 - (c) 12 construction change (day) keys.
 - 2) Owner or Owner's Representative will void operation of temporary construction keys.
 - 2. Permanent Keying:
 - a. Provide permanent cylinders/cores keyed by the manufacturer according to the following key system.
 - 1) Master Keying system as directed by the Owner.
 - b. Forward biting list and keys separately from cylinders, by means as directed by Owner. Failure to comply with forwarding requirements will be cause for replacement of cylinders/cores involved at no additional cost to Owner.

- c. Provide keys with the following features:
 - 1) Material: Nickel silver; minimum thickness of .107-inch (2.3mm)
- d. Identification:
 - 1) Mark permanent cylinders/cores and keys with applicable blind code for identification. Do not provide blind code marks with actual key cuts.
 - 2) Identification stamping provisions must be approved by the Architect and Owner.
 - 3) Stamp cylinders/cores and keys with Owner's unique key system facility code as established by the manufacturer; key symbol and embossed or stamped with "DO NOT DUPLICATE" along with the "PATENTED" or patent number to enforce the patent protection.
 - 4) Failure to comply with stamping requirements will be cause for replacement of keys involved at no additional cost to Owner.
 - 5) Forward permanent cylinders/cores to Owner, separately from keys, by means as directed by Owner.
- e. Quantity: Furnish in the following quantities.
 - 1) Master Keys: 6.
 - 2) Change (Day) Keys: 3 per cylinder/core that is keyed differently
 - 3) Key Blanks: Quantity as determined in the keying meeting.

2.07 DOOR CLOSERS

- A. Manufacturers and Products:
 - 1. Scheduled Manufacturer and Product:
 - a. LCN 4050A series
 - 2. Acceptable Manufacturers and Products:
 - a. Substitutions by Architect approval only
- B. Requirements:
 - 1. Provide door closers conforming to ANSI/BHMA A156.4 Grade 1 requirements by BHMA certified independent testing laboratory. ISO 9000 certify closers. Stamp units with date of manufacture code.
 - 2. Provide door closers with fully hydraulic, full rack and pinion action with cast aluminum cylinder.
 - 3. Closer Body: 1-1/2-inch 1.5 inch diameter with 11/16-inch (0.67 inch) diameter heat-treated pinion journal and full complement bearings.
 - 4. Hydraulic Fluid: Fireproof, passing requirements of UL 10C, and all weather requiring no seasonal closer adjustment for temperatures ranging from 120 degrees Fahrenheit to -30 degrees Fahrenheit.
 - 5. Spring Power: Continuously adjustable over full range of closer sizes, and providing reduced opening force as required by accessibility codes and standards.
 - 6. Hydraulic Regulation: By tamper-proof, non-critical valves, with separate adjustment for latch speed, general speed, and back check.
 - 7. Pressure Relief Valve (PRV) Technology: Not permitted.
 - 8. Provide stick on templates, special templates, drop plates, mounting brackets, or adapters for arms as required for details, overhead stops, and other door hardware items interfering with closer mounting.

2.08 DOOR TRIM

- A. Manufacturers:
 - 1. Scheduled Manufacturer:
 - a. Ives
 - 2. Acceptable Manufacturers:
 - a. Trimco
 - b. Rockwood
- B. Requirements:

1. Provide push plates, push bars, pull plates, pulls, and hands-free reversible door pulls with diameter and length as scheduled.

2.09 DOOR STOPS AND HOLDERS

- A. Manufacturers:
 1. Scheduled Manufacturer:
 - a. Ives
 2. Acceptable Manufacturers:
 - a. Trimco
 - b. Rockwood
- B. Provide door stops at each door leaf:
 1. Provide wall stops wherever possible. Provide concave type where lockset has a push button or thumbturn.
 2. Where a wall stop cannot be used, provide universal floor stops.
 3. Where wall or floor stop cannot be used, provide overhead stop.
 4. Provide roller bumper where doors open into each other and overhead stop cannot be used.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Prior to installation of hardware, examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance. Verify doors, frames, and walls have been properly reinforced for hardware installation.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Submit a list of deficiencies in writing and proceed with installation only after unsatisfactory conditions have been corrected.

3.02 INSTALLATION

- A. Mount door hardware units at heights to comply with the following, unless otherwise indicated or required to comply with governing regulations.
 1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
 2. Custom Steel Doors and Frames: HMMA 831.
 3. Interior Architectural Wood Flush Doors: ANSI/WDMA I.S. 1A
 4. Installation Guide for Doors and Hardware: DHI TDH-007-20
- B. Install door hardware in accordance with NFPA 80, NFPA 101 and provide post-install inspection, testing as specified in section 1.03.E unless otherwise required to comply with governing regulations.
- C. Install each hardware item in compliance with manufacturer's instructions and recommendations, using only fasteners provided by manufacturer.
- D. Do not install surface mounted items until finishes have been completed on substrate. Protect all installed hardware during painting.
- E. Set units level, plumb and true to line and location. Adjust and reinforce attachment substrate as necessary for proper installation and operation.
- F. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- G. Install operating parts so they move freely and smoothly without binding, sticking, or excessive clearance.
- H. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than quantity recommended by manufacturer for application indicated.

- I. Lock Cylinders:
 - 1. Install construction cores to secure building and areas during construction period.
 - 2. Replace construction cores with permanent cores as indicated in keying section.
 - 3. Furnish permanent cores to Owner for installation.
- J. Wiring: Coordinate with Division 26, ELECTRICAL and Division 28 ELECTRONIC SAFETY AND SECURITY sections for:
 - 1. Conduit, junction boxes and wire pulls.
 - 2. Connections to and from power supplies to electrified hardware.
 - 3. Connections to fire/smoke alarm system and smoke evacuation system.
 - 4. Connection of wire to door position switches and wire runs to central room or area, as directed by Architect.
 - 5. Connections to panel interface modules, controllers, and gateways.
 - 6. Testing and labeling wires with Architect's opening number.
- K. Continuous Hinges: Re-locate the door and frame fire rating labels where they will remain visible so that the hinge does not cover the label once installed.
- L. Door Closers & Auto Operators: Mount closers/operators on room side of corridor doors, inside of exterior doors, and stair side of stairway doors from corridors. Mount closers/operators so they are not visible in corridors, lobbies and other public spaces unless approved by Architect.
- M. Overhead Stops/Holders: Mount overhead stops/holders on room side of corridor doors, inside of exterior doors, and stair side of stairway doors.
- N. Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings or in equipment room, or alternate location as directed by Architect.
- O. Thresholds:
 - 1. Set thresholds in full bed of sealant complying with requirements specified in Division 07 Section "Joint Sealants."
 - 2. Aluminum thresholds to be cut-in, and scribed around mullions, frame members, and stops. Do not butt to thresholds. Provide a continuous surface across full width of opening from jamb to jamb.
 - 3. Where aluminum panic-type (rabbeted) thresholds with neoprene inserts are specified, undercut doors as required to properly mate with seal in threshold.
- P. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they may impede traffic or present tripping hazard.
- Q. Perimeter Gasketing:
 - 1. Apply to head and jamb, forming seal between door and frame.
 - 2. Install gasketing in a manner eliminating need to cut any seal to install surface mounted hardware. Install compatible mounting bracket for surface mounted hardware unless minimum 1/4 inch thick solid aluminum seals are provided for mounting of surface applied hardware.
- R. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
- S. Door Bottoms and Sweeps: Apply to bottom of door, forming seal with threshold when door is closed.

3.03 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

- B. Occupancy Adjustment: Approximately three to six months after date of Substantial Completion, examine and readjust each item of door hardware, including adjusting operating forces, as necessary to ensure function of doors and door hardware.

3.04 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items per manufacturer's instructions to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.05 DOOR HARDWARE SCHEDULE

- A. The intent of the hardware specification is to specify the hardware for interior and exterior doors, and to establish a type, continuity, and standard of quality. However, it is the door hardware supplier's responsibility to thoroughly review existing conditions, schedules, specifications, drawings, and other Contract Documents to verify the suitability of the hardware specified.
- B. Discrepancies, conflicting hardware, and missing items are to be brought to the attention of the architect with corrections made prior to the bidding process. Omitted items not included in a hardware set should be scheduled with the appropriate additional hardware required for proper application.
- C. Hardware items are referenced in the following hardware schedule. Refer to the above specifications for special features, options, cylinders/keying, and other requirements.
- D. Hardware Sets:

Abbreviation	Name
GLY	Glynn-Johnson Corp
IVE	H.B. Ives
LCN	LCN Commercial Division
SCH	Schlage Lock Company
VON	Von Duprin
ZER	Zero International Inc

HARDWARE GROUP NO. 01

101					
-----	--	--	--	--	--

PROVIDE EACH SGL DOOR(S) WITH THE FOLLOWING:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	SET	INTERIOR HINGE	5BB1 SERIES (QTY, WEIGHT, SIZE, NRP AS REQ'D)		652	IVE
1	EA	ENTRANCE LOCK	ND53P6D RHO		626	SCH
1	EA	SURFACE CLOSER	4050A EDA		689	LCN
1	EA	WALL STOP	WS406/407CCV		626	IVE
1	EA	GASKETING	488S @ HEAD & JAMBS		BK	ZER

END OF SECTION

This page intentionally left blank

**SECTION 08 8000
GLAZING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Insulating glass units.
- B. Glazing units.
- C. Glazing compounds.

1.02 RELATED REQUIREMENTS

- A. Section 07 2500 - Weather Barriers.
- B. Section 07 9200 - Joint Sealants: Sealants for other than glazing purposes.
- C. Section 08 1113 - Hollow Metal Frames: Glazed lites in doors and borrowed lites.
- D. Section 08 1416 - Flush Wood Doors: Glazed lites in doors.
- E. Section 08 3200 - Sliding Glass Doors: Glazing provided by door manufacturer.
- F. Section 08 4229 - Automatic Entrances: Glazing provided as part of door assembly.
- G. Section 08 4313 - Aluminum-Framed Storefronts: Glazing provided as part of storefront assembly.
- H. Section 10 2800 - Toilet, Bath, and Laundry Accessories: Mirrors.

1.03 REFERENCE STANDARDS

- A. 16 CFR 1201 - Safety Standard for Architectural Glazing Materials; Current Edition.
- B. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test; 2026.
- C. ASCE 7 - Minimum Design Loads and Associated Criteria for Buildings and Other Structures; Most Recent Edition Cited by Referring Code or Reference Standard.
- D. ASTM C864 - Standard Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers; 2005 (Reapproved 2026).
- E. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2018 (Reapproved 2024).
- F. ASTM C1036 - Standard Specification for Flat Glass; 2025.
- G. ASTM C1048 - Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass; 2025.
- H. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2025.
- I. ASTM C1376 - Standard Specification for Pyrolytic and Vacuum Deposition Coatings on Flat Glass; 2021a.
- J. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- K. ASTM E1300 - Standard Practice for Determining Load Resistance of Glass in Buildings; 2024.
- L. ASTM E2190 - Standard Specification for Insulating Glass Unit Performance and Evaluation; 2019.
- M. GANA (SM) - GANA Sealant Manual; 2008.
- N. ITS (DIR) - Directory of Listed Products; Current Edition.
- O. NFRC 100 - Procedure for Determining Fenestration Product U-factors; 2023.
- P. NFRC 200 - Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence; 2023.
- Q. NFRC 300 - Test Method for Determining the Solar Optical Properties of Glazing Materials and Systems; 2026.

- R. UL (DIR) - Online Certifications Directory; Current Edition.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene a preinstallation meeting one week before starting work of this section; require attendance by each of the affected installers.

1.05 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data on Insulating Glass Unit, Glazing Unit, and Plastic Film Glazing Types: Provide structural, physical and environmental characteristics, size limitations, special handling and installation requirements.
- C. Product Data on Glazing Compounds and Accessories: Provide chemical, functional, and environmental characteristics, limitations, special application requirements, and identify available colors.
- D. Samples: Submit one samples 12 by 12 inch in size of glass units, showing coloration.
- E. Samples: Submit 2 inch long bead of glazing sealant, color as selected.
- F. Certificate: Certify that products of this section meet or exceed specified requirements.
- G. Warranty Documentation: Submit manufacturer warranty and ensure that forms have been completed in Owner's name and registered with manufacturer.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least three years documented experience.

1.07 FIELD CONDITIONS

- A. Do not install glazing when ambient temperature is less than 40 degrees F.
- B. Maintain minimum ambient temperature before, during and 24 hours after installation of glazing compounds.

1.08 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.
- B. Insulating Glass Units: Provide a five (5) year manufacturer warranty to include coverage for seal failure, interpane dusting or misting, including providing products to replace failed units.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Float Glass Manufacturers:
1. Guardian Glass, LLC; _____: www.guardianglass.com/#sle.
 2. Pilkington North America Inc; _____: www.pilkington.com/na/#sle.
 3. Vitro Architectural Glass (formerly PPG Glass): www.vitroglazings.com/#sle.

2.02 PERFORMANCE REQUIREMENTS - EXTERIOR GLAZING ASSEMBLIES

- A. Provide type and thickness of exterior glazing assemblies to support assembly dead loads, and to withstand live loads caused by positive and negative wind pressure acting normal to plane of glass.
1. Design Pressure: Calculated in accordance with ASCE 7.
 2. Comply with ASTM E1300 for design load resistance of glass type, thickness, dimensions, and maximum lateral deflection of supported glass.
 3. Seismic Loads: Design and size glazing components to withstand seismic loads and sway displacement in accordance with the requirements of ASCE 7

4. Provide glass edge support system sufficiently stiff to limit the lateral deflection of supported glass edges to less than 1/175 of their lengths under specified design load.
5. Glass thicknesses listed are minimum.
- B. Weather-Resistive Barrier Seals: Provide completed assemblies that maintain continuity of building enclosure water-resistive barrier, vapor retarder, and/or air barrier.
 1. In conjunction with weather barrier related materials described in other sections, as follows:
 - a. Water-Resistive Barriers: See Section 07 2500.
 2. To maintain a continuous vapor retarder and/or air barrier throughout glazed assembly from glass pane to heel bead of glazing sealant.
- C. Thermal and Optical Performance: Provide exterior glazing products with performance properties as indicated. Performance properties are in accordance with manufacturer's published data as determined with the following procedures and/or test methods:
 1. Center of Glass U-Value: Comply with NFRC 100 using Lawrence Berkeley National Laboratory (LBNL) WINDOW 6.3 computer program.
 2. Center of Glass Solar Heat Gain Coefficient (SHGC): Comply with NFRC 200 using Lawrence Berkeley National Laboratory (LBNL) WINDOW 6.3 computer program.
 3. Solar Optical Properties: Comply with NFRC 300 test method.

2.03 GLASS MATERIALS

- A. Float Glass: Provide float glass based glazing unless otherwise indicated.
 1. Annealed Type: ASTM C1036, Type I - Transparent Flat, Class 1 - Clear, Quality - Q3.
 2. Kind HS - Heat-Strengthened Type: Complies with ASTM C1048.
 3. Thicknesses: As indicated; provide greater thickness as required for exterior glazing wind load design.

2.04 INSULATING GLASS UNITS

- A. Manufacturers:
 1. Glass: Any of the manufacturers specified for float glass.
- B. Insulating Glass Units: Types as indicated.
 1. Durability: Certified by an independent testing agency to comply with ASTM E2190.
 2. Coated Glass: Comply with requirements of ASTM C1376 for pyrolytic (hard-coat) or magnetic sputter vapor deposition (soft-coat) type coatings on flat glass; coated vision glass, Kind CV; coated overhead glass, Kind CO; or coated spandrel glass, Kind CS.
 3. Metal-Edge Spacers: Aluminum, bent and soldered corners.
 4. Spacer Color: Bronze.
 5. Edge Seal:
 - a. Dual-Sealed System: Provide polyisobutylene sealant as primary seal applied between spacer and glass panes, and silicone, polysulfide, or polyurethane sealant as secondary seal applied around perimeter.
 6. Color: Black.
 7. Purge interpane space with dry air, hermetically sealed.
 8. Capillary Tubes: Provide tubes from air space for insulating glass units without inert type gas that have a change of altitude greater than 2500 feet between point of fabrication and point of installation to permit pressure equalization of air space.
 - a. Breather Tubes: Seal or crimp breather tubes upon installation in accordance with insulating glass fabricator's requirements.
 - b. Inert gas may be installed in the field into air space in accordance with insulating glass fabricator's and installer's requirements.
- C. Type IG-1 - Insulating Glass Units: Vision glass, double glazed.
 1. Applications: Exterior glazing unless otherwise indicated.
 2. Space between lites filled with air.
 3. Outboard Lite: Annealed float glass, 1/4 inch thick, minimum.

- a. Tint: Clear.
- b. Coating: Self-cleaning type, on #1 surface.
- c. Coating: Low-E (passive type), on #2 surface.
4. Inboard Lite: Annealed float glass, 1/4 inch thick, minimum.
 - a. Tint: Clear.
5. Total Thickness: 1 inch.
6. Thermal Transmittance (U-Value), Summer - Center of Glass: .26, nominal.
7. Visible Light Transmittance (VLT): 32% to 64% percent, nominal.
8. Solar Heat Gain Coefficient (SHGC): 0.19 to 0.27, nominal.

2.05 BASIS OF DESIGN - INSULATING GLASS UNITS

- A. Basis of Design - Insulating Glass Units: Vision glazing, with low-e coating.
 1. Applications: Exterior insulating glass glazing unless otherwise indicated.
 2. Space between lites filled with argon.
 3. Total Thickness: 1 inch.
 4. Thermal Transmittance (U-Value), Summer - Center of Glass: .26, nominal.
 5. Visible Light Transmittance (VLT): 32% to 64% percent, nominal.
 6. Solar Heat Gain Coefficient (SHGC): 0.19 to 0.27, nominal.
 7. Visible Light Reflectance, Outside: 64 percent, nominal.
 8. Glazing Method: Dry glazing method, gasket glazing.
 9. Coated Glass: Comply with requirements of ASTM C1376 for pyrolytic (hard-coat) or magnetic sputter vapor deposition (soft-coat) type coatings on flat glass; coated vision glass, Kind CV; coated overhead glass, Kind CO; or coated spandrel glass, Kind CS.
 10. Spacer Color: Black.
 11. Edge Seal:
 12. Color: Black.
 13. Purge interpane space with dry air, hermetically sealed.
 14. Basis of Design - Vitro Architectural Glass (formerly PPG Glass):
www.vitroglazings.com/#sle.
 15. Outboard Lite: Annealed float glass, 1/4 inch thick, minimum.
 - a. Low-E Coating: Vitro Architectural Glass (formerly PPG Glass) Solarban 70 glass on #2 surface.
 - b. Glass: Clear.
 16. Inboard Lite: Heat-strengthened float glass, 1/4 inch thick.
 17. Other Manufacturers: Provide either the product identified as "Basis of Design" or an equivalent product of another acceptable manufacturer.
 18. Substitution Procedures: See Section 01 6000 - Product Requirements.

2.06 GLAZING COMPOUNDS

- A. Type GC-2 - Butyl Sealant: Single component; ASTM C920 Grade NS, Class 12-1/2, Uses M and A, Shore A hardness of 10 to 20; black color.
- B. Type GC-5 - Silicone Sealant: Single component; neutral curing; capable of water immersion without loss of properties; nonbleeding, nonstaining; ASTM C920 Type S, Grade NS, Class 25, Uses M, A, and G; with cured Shore A hardness range of 15 to 25; _____ color.
- C. Manufacturers:
 1. Dow Corning Corporation: www.dowcorning.com/construction/#sle. Dow Corning Corporation: www.dowcorning.com/construction/#sle.
 2. Tremco Commercial Sealants & Waterproofing; Proglaze: www.tremcosealants.com/#sle.
 3. Substitutions: See Section 01 6000 - Product Requirements.

2.07 ACCESSORIES

- A. Setting Blocks: Silicone, with 80 to 90 Shore A durometer hardness; ASTM C864 Option II. Length of 0.1 inch for each square foot of glazing or minimum 4 inch by width of glazing rabbet space minus 1/16 inch by height to suit glazing method and pane weight and area.

- B. Spacer Shims: Neoprene, 50 to 60 Shore A durometer hardness; ASTM C864 Option II. Continuous by one half the height of the glazing stop by thickness to suit application, self adhesive on one face.
- C. Glazing Tape, Back Bedding Mastic Type: Preformed, butyl-based, 100 percent solids compound with integral resilient spacer rod applicable to application indicated; 5 to 30 cured Shore A durometer hardness; coiled on release paper; black color.
 - 1. Width: As required for application.
 - 2. Thickness: As required for application.
 - 3. Spacer Rod Diameter: As required for application.
- D. Glazing Splines: Resilient silicone extruded shape to suit glazing channel retaining slot; ASTM C864 Option II; color black.
- E. Glazing Clips: Manufacturer's standard type.

PART 3 EXECUTION

3.01 VERIFICATION OF CONDITIONS

- A. Verify that openings for glazing are correctly sized and within tolerances, including those for size, squareness, and offsets at corners.
- B. Verify that surfaces of glazing channels or recesses are clean, free of obstructions that may impede moisture movement, weeps are clear, and support framing is ready to receive glazing system.
- C. Verify that sealing between joints of glass framing members has been completed effectively.

3.02 PREPARATION

- A. Clean contact surfaces with appropriate solvent and wipe dry within maximum of 24 hours before glazing. Remove coatings that are not tightly bonded to substrates.
- B. Seal porous glazing channels or recesses with substrate compatible primer or sealer.
- C. Prime surfaces scheduled to receive sealant where required for proper sealant adhesion.

3.03 INSTALLATION, GENERAL

- A. Install glazing in compliance with written instructions of glass, gaskets, and other glazing material manufacturers, unless more stringent requirements are indicated, including those in glazing referenced standards.
- B. Install glazing sealants in accordance with ASTM C1193, GANA (SM), and manufacturer's instructions.
- C. Set glass lites in proper orientation so that coatings face exterior or interior as indicated.
- D. Prevent glass from contact with any contaminating substances that may be the result of construction operations such as, and not limited to the following; weld splatter, fire-safing, plastering, mortar droppings, and paint.

3.04 INSTALLATION - DRY GLAZING METHOD (GASKET GLAZING)

- A. Application - Exterior and/or Interior Glazed: Set glazing infills from either the exterior or the interior of the building.
- B. Place setting blocks at 1/4 points with edge block no more than 6 inch from corners.
- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure on gasket to attain full contact.
- D. Install removable stops without displacing glazing gasket; exert pressure for full continuous contact.

3.05 INSTALLATION - WET/DRY GLAZING METHOD (PREFORMED TAPE AND SEALANT)

- A. Application - Exterior Glazed: Set glazing infills from the exterior of the building.

- B. Cut glazing tape to length and set against permanent stops, 3/16 inch below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- C. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- D. Place setting blocks at 1/4 points with edge block no more than 6 inch from corners.
- E. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to attain full contact at perimeter of pane or glass unit.
- F. Install removable stops, with spacer strips inserted between glazing and applied stops 1/4 inch below sight lines.
 - 1. Place glazing tape on glazing pane of unit with tape flush with sight line.
- G. Fill gap between glazing and stop with _____ type sealant to depth equal to bite of frame on glazing, but not more than 3/8 inch below sight line.
- H. Apply cap bead of _____ type sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.06 INSTALLATION - WET/DRY GLAZING METHOD (TAPE AND SEALANT)

- A. Application - Interior Glazed: Set glazing infills from the interior of the building.
- B. Cut glazing tape to length and install against permanent stops, projecting 1/16 inch above sight line.
- C. Place setting blocks at 1/4 points with edge block no more than 6 inch from corners.
- D. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- E. Install removable stops, spacer shims inserted between glazing and applied stops at 24 inch intervals, 1/4 inch below sight line.
- F. Fill gaps between pane and applied stop with _____ type sealant to depth equal to bite on glazing, to uniform and level line.
- G. Carefully trim protruding tape with knife.

3.07 CLEANING

- A. Remove excess glazing materials from finish surfaces immediately after application using solvents or cleaners recommended by manufacturers.
- B. Remove nonpermanent labels immediately after glazing installation is complete.
- C. Clean glass and adjacent surfaces after sealants are fully cured.
- D. Clean glass on both exposed surfaces not more than 4 days prior to Date of Substantial Completion in accordance with glass manufacturer's written recommendations.

3.08 PROTECTION

- A. Remove and replace glass that is damaged during construction period prior to Date of Substantial Completion.

END OF SECTION

**SECTION 09 0561
COMMON WORK RESULTS FOR FLOORING PREPARATION**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. This section applies to floors identified in contract documents that are receiving the following types of floor coverings:
 - 1. Resilient tile and sheet.
 - 2. Carpet tile.
 - 3. Cementitious underlayments and patching compounds.
- B. Removal of existing floor coverings.
- C. Preparation of existing concrete floor slabs for installation of floor coverings.
- D. Patching compound.

1.02 RELATED REQUIREMENTS

1.03 REFERENCE STANDARDS

- A. ASTM C109/C109M - Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 50 mm [2 in.] Cube Specimens); 2026.
- B. ASTM C472 - Standard Test Methods for Physical Testing of Gypsum, Gypsum Plasters, and Gypsum Concrete; 2020.
- C. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring; 2022.
- D. ASTM F2170 - Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes; 2019a.
ASTM F2659 - surface moisture test using electrical impedance meter

1.04 SUBMITTALS

- A. Visual Observation Report: For existing floor coverings to be removed.
- B. Adhesive Bond and Compatibility Test Report.

1.05 QUALITY ASSURANCE

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, handle, and protect products in accordance with manufacturer's instructions and recommendations.
- B. Deliver materials in manufacturer's packaging; include installation instructions.
- C. Keep materials from freezing.

1.07 FIELD CONDITIONS

- A. Maintain ambient temperature in spaces where concrete testing is being performed, and for at least 72 hours prior to testing, at not less than 65 degrees F or more than 85 degrees F.
- B. Maintain relative humidity in spaces where concrete testing is being performed, and for at least 48 hours prior to testing, at not less than 40 percent and not more than 60 percent or as per manufacturers requirements.
- C. Product, substrate and adhesive are to acclimatize together. All are to be within 5° of each other prior to installation.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Patching Compound: Floor covering manufacturer's recommended product, suitable for conditions, and compatible with adhesive and floor covering. In the absence of any

recommendation from flooring manufacturer, provide a product with the following characteristics:

1. Cementitious moisture-, mildew-, and alkali-resistant compound, compatible with floor, floor covering, and floor covering adhesive, and capable of being feathered to nothing at edges.
 2. Compressive Strength: 3000 psi, minimum, after 28 days, when tested in accordance with ASTM C109/C109M or ASTM C472, whichever is appropriate.
- B. Self Leveling Underlayment: Floor covering manufacturer's recommended product, suitable for the moisture and pH conditions present; low-VOC. In the absence of any recommendation from flooring manufacturer, provide the following:
1. Manufacturers:
 - a. Sika
 2. Thickness: As required for application and in accordance with manufacturer's installation instructions.
 3. Products:
 - a. SikaLevel
 - b. Substitutions: See Section 01 6000-Product Requirements.

PART 3 EXECUTION

3.01 CONCRETE SLAB PREPARATION

- A. Follow recommendations of testing agency.
- B. Perform following operations in the order indicated:
 1. Existing concrete slabs (on-grade and elevated) with existing floor coverings:
 - a. Visual observation of existing floor covering, for adhesion, water damage, alkaline deposits, and other defects.
 - b. Removal of existing floor covering.
 2. Preliminary cleaning.
 3. Specified remediation, if required.
 4. Patching, smoothing, and leveling, as required.
 5. Other preparation specified.
 6. Adhesive bond and compatibility test.
 7. Protection.
- C. Remediations:
 1. Active Water Leaks or Continuing Moisture Migration to Surface of Slab: Correct this condition before doing any other remediation; re-test after correction.
 2. Excessive Moisture Emission or Relative Humidity: If an adhesive that is resistant to the level of moisture present is available and acceptable to flooring manufacturer, use that adhesive for installation of the flooring; if not, apply remedial floor coating or remedial sheet membrane over entire suspect floor area.

3.02 REMOVAL OF EXISTING FLOOR COVERINGS

- A. Dispose of removed materials in accordance with local, State, and federal regulations and as specified.

3.03 PRELIMINARY CLEANING

- A. Clean floors of dust, solvents, paint, wax, oil, grease, asphalt, residual adhesive, adhesive removers, film-forming curing compounds, sealing compounds, alkaline salts, excessive laitance, mold, mildew, and other materials that might prevent adhesive bond.
- B. Do not use solvents or other chemicals for cleaning.

3.04 INTERNAL RELATIVE HUMIDITY TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.

- B. Test in accordance with ASTM F2170 Procedure A and as follows.
- C. In the event that test values exceed floor covering manufacturer's limits, perform remediation as indicated. In the absence of manufacturer limits, perform remediation if any test value exceeds 75 percent relative humidity.

3.05 ALKALINITY TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.
- B. The following procedure is the equivalent of that described in ASTM F710, repeated here for the CMGC Contractor's convenience.
- C. Use a wide range alkalinity (pH) test paper, its associated chart, and distilled or deionized water.
- D. Place several drops of water on a clean surface of concrete, forming a puddle approximately 1 inch in diameter. Allow the puddle to set for approximately 60 seconds, then dip the alkalinity (pH) test paper into the water, remove it, and compare immediately to chart to determine alkalinity (pH) reading.

3.06 PREPARATION

- A. See individual floor covering section(s) for additional requirements.
- B. Comply with requirements and recommendations of floor covering manufacturer.
- C. Fill and smooth surface cracks, grooves, depressions, control joints and other non-moving joints, and other irregularities with patching compound.
- D. Do not fill expansion joints, isolation joints, or other moving joints.

3.07 ADHESIVE BOND AND COMPATIBILITY TESTING

- A. Comply with requirements and recommendations of floor covering manufacturer.

3.08 PROTECTION

- A. Cover prepared floors with building paper or other durable covering.

This page intentionally left blank

**SECTION 09 2116
GYPSUM BOARD ASSEMBLIES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Gypsum wallboard.
- B. Joint treatment and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 01 6116 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 06 1000 - Rough Carpentry: Wood blocking product and execution requirements.
- C. Section 07 2100 - Thermal Insulation: Acoustic insulation.
- D. Section 07 2500 - Weather Barriers: Water-resistive barrier over sheathing.
- E. Section 07 8400 - Firestopping: Top-of-wall assemblies at fire-resistance-rated walls.
- F. Section 07 9200 - Joint Sealants: Sealing acoustical gaps in construction other than gypsum board or plaster work.

1.03 REFERENCE STANDARDS

- A. ASTM C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products; 2020.
- B. ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board; 2025.
- C. ASTM C1396/C1396M - Standard Specification for Gypsum Board; 2024.
- D. GA-216 - Application and Finishing of Gypsum Panel Products; 2024.
- E. GA-600 - Fire Resistance and Sound Control Design Manual; 2024.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data:

1.05 DELIVERY, STORAGE, AND HANDLING

- A. See Section 01 7419 - Construction Waste Management and Disposal for packaging waste requirements.
- B. Store gypsum products and accessories indoors and keep above freezing. Elevate boards above floor, on nonwicking supports, in accordance with manufacturer's recommendations.

PART 2 PRODUCTS

2.01 BOARD MATERIALS

- A. Manufacturers - Gypsum-Based Board:
 - 1. American Gypsum Company: www.americangypsum.com/#sle.
 - 2. CertainTeed Corporation: www.certainteed.com/#sle.
 - 3. Georgia-Pacific Gypsum: www.gpgypsum.com/#sle.
 - 4. National Gypsum Company: www.nationalgypsum.com/#sle.
 - 5. USG Corporation: www.usg.com/#sle.
 - 6. Substitutions: See Section 01 6000 - Product Requirements.
- B. Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 - 1. Application: Use for vertical surfaces and ceilings, unless otherwise indicated.
 - 2. At Assemblies Indicated with Fire-Resistance Rating: Use type required by indicated tested assembly; if no tested assembly is indicated, use Type X board, UL or WH listed.
 - 3. Thickness:
 - a. Vertical Surfaces: 5/8 inch.

- b. Ceilings: 5/8 inch.
- C. Ceiling Board: Special sag resistant gypsum ceiling board as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 - 1. Application: ceilings in wet areas, unless otherwise indicated.
 - 2. Thickness: 5/8 inch.
 - 3. Edges: Tapered.

2.02 GYPSUM BOARD ACCESSORIES

- A. Beads, Joint Accessories, and Other Trim: ASTM C1047, galvanized steel or rolled zinc, unless noted otherwise.
 - 1. Corner Beads: Low profile, for 90 degree outside corners.
 - 2. Expansion Joints:
 - a. Type: V-shaped metal with factory-installed protective tape.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that project conditions are appropriate for work of this section to commence.

3.02 BOARD INSTALLATION

- A. Comply with ASTM C840, GA-216, and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- B. Single-Layer Nonrated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.

3.03 INSTALLATION OF TRIM AND ACCESSORIES

- A. Control Joints: Place control joints consistent with lines of building spaces and as indicated on drawings.
 - 1. Not more than 30 feet apart on walls and ceilings over 50 feet long.
 - 2. At exterior soffits, not more than 30 feet apart in both directions.
- B. Corner Beads: Install at external corners, using longest practical lengths.
- C. Edge Trim: Install at locations where gypsum board abuts dissimilar materials.

END OF SECTION

**SECTION 09 3000
TILING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Tile for floor applications.
- B. Tile for wall applications.

NOTE: SOME PRODUCTS HAVE LONGER LEAD TIMES. CONTRACTOR SHALL SCHEDULE ACCORDINGLY.

1.02 RELATED REQUIREMENTS

- A. Section 07 9200 - Joint Sealants: Sealing joints between tile work and adjacent construction and fixtures.

1.03 REFERENCE STANDARDS

- A. ANSI A118.3 - American National Standard Specifications for Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy and Water Cleanable Tile-Setting Epoxy Adhesive; 2021.
- B. ANSI A118.4 - American National Standard Specifications for Modified Dry-Set Cement Mortar; 2023.
- C. ANSI A118.10 - American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation; 2023.
- D. ANSI A118.12 - American National Standard Specifications for Crack Isolation Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation; 2014 (Reaffirmed 2024).
- E. ANSI A137.1 - American National Standard Specifications for Ceramic Tile; 2022.
- F. ANSI A326.3 - American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials; 2021.
- G. ASTM C373 - Standard Test Methods for Determination of Water Absorption and Associated Properties by Vacuum Method for Pressed Ceramic Tiles and Glass Tiles and Boil Method for Extruded Ceramic Tiles and Non-tile Fired Ceramic Whiteware Products; 2018 (Reapproved 2023).
- H. TCNA (HB) - Handbook for Ceramic, Glass, and Stone Tile Installation; 2026.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide manufacturers' data sheets on tile, mortar, grout, and accessories. Include instructions for using grouts and adhesives.
- C. Shop Drawings: Indicate tile layout, patterns, color arrangement, perimeter conditions, junctions with dissimilar materials, control and expansion joints, thresholds, and setting details.
- D. Samples: Mount tile and apply grout on two plywood panels, minimum 18 by 18 inches in size illustrating pattern, color variations, and grout joint size variations.
- E. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 6000 - Product Requirements, for additional provisions.
 - 2. Extra Tile: 2 percent of each size, color, and surface finish combination, but not less than 1 box of each type.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the types of products specified in this section, with minimum five years of documented experience.
- B. Installer Qualifications: Company specializing in performing tile installation, with minimum of five years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. See Section 01 7419 - Construction Waste Management and Disposal for packaging waste requirements.
- B. Protect adhesives from freezing or overheating in accordance with manufacturer's instructions.

1.07 FIELD CONDITIONS

- A. Maintain ambient and substrate temperature above 50 degrees F and below 100 degrees F during installation and curing of setting materials.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Tile:
 - 1. As indicated on drawings.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PERFORMANCE REQUIREMENTS

- A. Floor Tile: Provide tile for flooring applications with minimum wet Dynamic Coefficient of Friction (DCOF) of 0.42 when tested in accordance with ANSI A326.3.

2.03 TILE

- A. Ceramic Mosaic Tile: ANSI A137.1 standard grade.
 - 1. Moisture Absorption: 0 to 0.5 percent as tested in accordance with ASTM C373.
 - 2. Size: As indicated on drawings.
 - 3. Shape: As indicated on drawings.
 - 4. Edges: Square.
 - 5. Color: As indicated on drawings.
 - 6. Trim Units: Cove Base as indicated in drawings.

2.04 TRIM AND ACCESSORIES

- A. Ceramic Trim: Matching cove base ceramic shapes in sizes coordinated with field tile.
 - 1. Applications:
 - a. Floor to Wall Joints: Cove base.
- B. Non-Ceramic Trim: Anodized extruded aluminum, style and dimensions to suit application, set with tile mortar or adhesive.
 - 1. Applications:
 - a. As indicated on drawings.
 - 2. Products:
 - a. Schluter-Systems; ____: www.schluter.com/#sle.
 - b. Substitutions: See Section 01 6000 - Product Requirements.

2.05 SETTING MATERIALS

- A. Latex-Portland Cement Mortar Bond Coat: ANSI A118.4.

2.06 GROUTS

- A. Epoxy Grout: ANSI A118.3 chemical resistant and water-cleanable epoxy grout.
 - 1. Applications: Where indicated.
 - 2. Color: As indicated on drawings.

2.07 MAINTENANCE MATERIALS

2.08 ACCESSORY MATERIALS

- A. Waterproofing Membrane at Floors: Specifically designed for bonding to cementitious substrate under thick mortar bed or thin-set tile; complying with ANSI A118.10.
 - 1. Crack Resistance: No failure at 1/16-inch gap, minimum; comply with ANSI A118.12.
 - 2. Fluid or Trowel Applied Type:

- a. Material: Synthetic rubber or Acrylic.
- b. Thickness: 25 mils, minimum, dry film thickness.
- c. Products:
 - 1) Custom Building Products; RedGard Crack Prevention and Waterproofing Membrane: www.custombuildingproducts.com/#sle.
 - 2) Substitutions: See Section 01 6000 - Product Requirements.

B. Reinforcing Mesh: 2 by 2 inch size weave of 16/16 wire size; welded fabric, galvanized.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify subfloor surfaces are smooth and flat within tolerances specified for that type of work and are ready to receive tile.
- B. Verify that subfloor surfaces are dust free and free of substances that could impair bonding of setting materials to subfloor surfaces.

3.02 PREPARATION

- A. Vacuum clean surfaces and damp clean.
- B. Seal substrate surface cracks with filler.

3.03 INSTALLATION - GENERAL

- A. Install tile and thresholds and grout in accordance with applicable requirements of ANSI A108.1a through ANSI A108.13, manufacturer's instructions, and TCNA (HB) recommendations.
- B. Lay tile to pattern indicated on drawings. Do not interrupt tile pattern through openings.
- C. Cut and fit tile to penetrations through tile, leaving sealant joint space. Form corners and bases neatly. Align floor joints.
- D. Place tile joints uniform in width, subject to variance in tolerance allowed in tile size. Make grout joints without voids, cracks, excess mortar or excess grout, or too little grout.
- E. Form internal angles square and external angles bullnosed.
- F. Install non-ceramic trim in accordance with manufacturer's instructions.
- G. Sound tile after setting. Replace hollow sounding units.
- H. Keep control and expansion joints free of mortar, grout, and adhesive.
- I. Prior to grouting, allow installation to completely cure; minimum of 48 hours.
- J. Grout tile joints unless otherwise indicated.
- K. At changes in plane and tile-to-tile control joints, use tile sealant instead of grout, with either bond breaker tape or backer rod as appropriate to prevent three-sided bonding.

3.04 INSTALLATION - FLOORS - THIN-SET METHODS

- A. Over interior concrete substrates, install in accordance with TCNA (HB) Method as listed below, with grout, unless otherwise indicated.
 - 1. Where epoxy or furan grout is indicated on drawings, but not epoxy or furan bond coat, install in accordance with TCNA (HB) Method F115.

3.05 INSTALLATION - WALL TILE

- A. Over cementitious backer units on studs, install in accordance with TCNA (HB) Method W244C, using membrane at toilet rooms.
- B. Over gypsum wallboard on wood or metal studs, install in accordance with TCNA (HB) Method W243, thin-set with dry-set or latex-Portland cement bond coat.

3.06 CLEANING

- A. Clean tile and grout surfaces.

3.07 PROTECTION

- A. Do not permit traffic over finished floor surface for 4 days after installation.

END OF SECTION

**SECTION 09 6500
RESILIENT FLOORING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Resilient tile flooring.
- B. Resilient base.
- C. Installation accessories.

1.02 RELATED REQUIREMENTS

- A. Section 03 3000 - Cast-in-Place Concrete: Restrictions on curing compounds for concrete slabs and floors to receive adhesive-applied resilient flooring.
- B. Section 09 0561 - Common Work Results for Flooring Preparation: Removal of existing floor coverings, cleaning, and preparation.
- C. Section 09 0561-Common Work Results for Flooring Preparation: Time of Install Testing & Environmental Verification.
- D. Section 26 0526 - Grounding and Bonding for Electrical Systems: Grounding and bonding of static control flooring to building grounding system.

1.03 REFERENCE STANDARDS

- A. ASTM F1066 - Standard Specification for Vinyl Composition Floor Tile; 2025.
- B. ASTM F1303 - Standard Specification for Sheet Vinyl Floor Covering with Backing; 2026.
- C. ASTM F1861 - Standard Specification for Resilient Wall Base; 2021 (Reapproved 2025).

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.
- C. Shop Drawings: Indicate seaming plans and floor patterns.
- D. Verification Samples: Submit two samples, 6 by 6 inch in size illustrating color and pattern for each resilient flooring product specified.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing specified flooring with minimum three years documented experience.
- B. Installer Qualifications: Company specializing in installing specified flooring with minimum three years documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Upon receipt, immediately remove any shrink-wrap and check materials for damage and the correct style, color, quantity and run numbers.
- B. Store all materials off of the floor in an acclimatized, weather-tight space.
- C. Maintain temperature in storage area between 55 degrees F and 90 degrees F.
- D. Protect roll materials from damage by storing on end.
- E. Do not double stack pallets.

1.07 FIELD CONDITIONS

- A. Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

PART 2 PRODUCTS

2.01 SHEET FLOORING

- A. Vinyl Sheet Flooring - Type ____: Heterogenous, transparent or translucent vinyl wear layer over interlayer and backing.
 - 1. Manufacturers:
 - a. As indicated on drawings
 - b. Substitutions: See Section 01 6000 - Product Requirements.
 - 2. Minimum Requirements: Comply with ASTM F1303, Type I, with Class A fibrous backing.
 - 3. Wear Layer Thickness: 0.020 inch minimum.
 - 4. Total Thickness: 0.080 inch minimum.

2.02 TILE FLOORING

- A. Vinyl Composition Tile - Type ____: Homogeneous, with color extending throughout thickness.
 - 1. Manufacturers:
 - a. As indicated on drawings.
 - b. Substitutions: See Section 01 6000 - Product Requirements.
 - 2. Minimum Requirements: Comply with ASTM F1066, of Class corresponding to type specified.
 - 3. Size: 12 by 12 inch.
 - 4. Thickness: 0.125 inch.

2.03 RESILIENT BASE

- A. Resilient Base: ASTM F1861, Type TP, rubber, thermoplastic; top set Style B, Cove.
 - 1. Manufacturers:
 - a. Roppe Corporation: www.roppe.com/#sle.
 - b. Substitutions: See Section 01 6000 - Product Requirements.
 - 2. Height: 4 inches.
 - 3. Thickness: 0.125 inch.
 - 4. Finish: Satin.
 - 5. Length: Roll.
 - 6. Color: As indicated on drawings.
 - 7. Accessories: Premolded external corners.

2.04 ACCESSORIES

- A. Primers, Adhesives, and Seam Sealer: Waterproof; types recommended by flooring manufacturer.
- B. Moldings, Transition and Edge Strips: Same material as flooring.
 - 1. Manufacturers:
 - a. Johnsonite: www.johnsonite.com.
 - b. Roppe Corp:[None - N/A]: www.roppe.com/#sle.
 - c. Substitutions: See Section 01 6000 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces are flat to tolerances acceptable to flooring manufacturer, free of cracks that might telegraph through flooring, clean, dry, and free of curing compounds, surface hardeners, and other chemicals that might interfere with bonding of flooring to substrate.
- B. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive resilient base.
- C. Cementitious Subfloor Surfaces: Verify that substrates are ready for resilient flooring installation by testing for moisture and alkalinity (pH).
 - 1. Test in accordance with Section 09 0561.

2. Obtain instructions if test results are not within limits recommended by resilient flooring manufacturer and adhesive materials manufacturer.

3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Remove subfloor ridges and bumps. Fill minor low spots, cracks, joints, holes, and other defects with subfloor filler to achieve smooth, flat, hard surface.
- C. Prohibit traffic until filler is fully cured.
- D. Clean substrate.

3.03 INSTALLATION - GENERAL

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install in accordance with manufacturer's written instructions.
- C. Spread only enough adhesive to permit installation of materials before initial set.
- D. Fit joints and butt seams tightly.
- E. Set flooring in place, press with heavy roller to attain full adhesion.
- F. Where type of floor finish, pattern, or color are different on opposite sides of door, terminate flooring under centerline of door.
- G. Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated.
- H. Scribe flooring to walls, columns, cabinets, floor outlets, and other appurtenances to produce tight joints.

3.04 INSTALLATION - SHEET FLOORING

- A. Lay flooring with joints and seams parallel to longer room dimensions, to produce minimum number of seams. Lay out seams to avoid widths less than 1/3 of roll width; match patterns at seams.
- B. Cut sheet at seams in accordance with manufacturer's instructions.

3.05 INSTALLATION - TILE FLOORING

- A. Mix tile from container to ensure shade variations are consistent when tile is placed, unless otherwise indicated in manufacturer's installation instructions.
- B. Fully adhere resilient flooring to substrate.

3.06 INSTALLATION - RESILIENT BASE

- A. Fit joints tightly and make vertical. Maintain minimum dimension of 18 inches between joints.
- B. Install base on solid backing. Bond tightly to wall and floor surfaces.
- C. Scribe and fit to door frames and other interruptions.

3.07 CLEANING

- A. Remove excess adhesive from floor, base, and wall surfaces without damage.
- B. Clean in accordance with manufacturer's written instructions.

3.08 PROTECTION

- A. Prohibit traffic on resilient flooring for 48 hours after installation.

END OF SECTION

This page intentionally left blank

**SECTION 09 6813
TILE CARPETING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Carpet tile, fully adhered.

1.02 RELATED REQUIREMENTS

- A. Section 01 6116 - Volatile Organic Compound (VOC) Content Restrictions.

1.03 REFERENCE STANDARDS

- A. ASTM D2859 - Standard Test Method for Ignition Characteristics of Finished Textile Floor Covering Materials; 2016 (Reapproved 2021).
- B. ASTM E648 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source; 2025a.
- C. CRI 104 - Standard for Installation of Commercial Carpet; 2018.
- D. NFPA 253 - Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source; 2023.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Samples: Submit two carpet tiles illustrating backing,color and pattern design for each carpet color selected.
- C. Operation and Maintenance Data: Include maintenance procedures, recommended maintenance materials, and suggested schedule for cleaning.
- D. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 6000 - Product Requirements, for additional provisions.
 - 2. Extra Carpet Tiles: Quantity equal to 5 percent of total installed of each color and pattern installed.

1.05 QUALITY ASSURANCE

- A. Installer Qualifications: Company specializing in installing carpet tile with minimum three years documented experience and approved by carpet tile manufacturer.

1.06 FIELD CONDITIONS

- A. Store materials in area of installation for minimum period of 24 hours prior to installation.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Tile Carpeting:
 - 1. As indicated on drawings.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 MATERIALS

- A. Tile Carpeting: manufactured in one color dye lot.
 - 1. Tile Size: varies
 - 2. Color: As indicated on drawings.
 - 3. Pattern: As indicated on drawings.
 - 4. Critical Radiant Flux: Minimum of 0.22 watts/sq cm, when tested in accordance with ASTM E648 or NFPA 253.
 - 5. Surface Flammability Ignition: Pass ASTM D2859 (the "pill test").
 - 6. VOC Content: Comply with Section 01 6116.

2.03 ACCESSORIES

- A. Carpet Tile Adhesive: Recommended by carpet tile manufacturer.
- B. Transitions: As indicated on drawings.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that subfloor surfaces are smooth and flat within tolerances specified for that type of work and are ready to receive carpet tile.
- B. Verify that subfloor surfaces are dust-free and free of substances that could impair bonding of adhesive materials to subfloor surfaces.
- C. Verify that required floor-mounted utilities are in correct location.

3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Remove subfloor ridges and bumps. Fill minor or local low spots, cracks, joints, holes, and other defects with subfloor filler.
- C. Apply, trowel, and float filler to achieve smooth, flat, hard surface. Prohibit traffic until filler is cured.

3.03 INSTALLATION

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install carpet tile in accordance with manufacturer's instructions and CRI 104 (Commercial).
- C. Blend carpet from different cartons to ensure minimal variation in color match.
- D. Cut carpet tile clean. Fit carpet tight to intersection with vertical surfaces without gaps.
- E. Locate change of color or pattern between rooms under door centerline.
- F. Fully adhere carpet tile to substrate.
- G. Trim carpet tile neatly at walls and around interruptions.
- H. Complete installation of edge strips, concealing exposed edges.

3.04 CLEANING

- A. Remove excess adhesive without damage, from floor, base, and wall surfaces.
- B. Clean and vacuum carpet surfaces.

END OF SECTION

**SECTION 09 9123
INTERIOR PAINTING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints, stains and varnishes.
- C. Scope: Finish interior surfaces exposed to view, unless fully factory-finished and unless otherwise indicated.
 - 1. Prime surfaces to receive wall coverings.
 - 2. Mechanical and Electrical:
 - a. In finished areas, paint insulated and exposed pipes, conduit, and boxes, insulated and exposed ducts, hangers, brackets, collars and supports, mechanical equipment and electrical equipment, unless otherwise indicated.
 - b. Paint interior surfaces of air ducts and convectors and baseboard heating cabinets that are visible through grilles and louvers with one coat of flat black paint to visible surfaces.
- D. Do Not Paint or Finish the Following Items:
 - 1. Items factory-finished unless otherwise indicated; materials and products having factory-applied primers are not considered factory finished.
 - 2. Items indicated to receive other finishes.
 - 3. Items indicated to remain unfinished.
 - 4. Fire rating labels, equipment serial number and capacity labels, bar code labels, and operating parts of equipment.
 - 5. Floors, unless specifically indicated.
 - 6. Glass.
 - 7. Concealed pipes, ducts, and conduits.

1.02 RELATED REQUIREMENTS

- A. Section 016116 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 055000 - Metal Fabrications: Shop-primed items.
- C. Section 099600 - High-Performance Coatings.

1.03 REFERENCE STANDARDS

- A. ASTM D16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications; 2024.
- B. ASTM D4258 - Standard Practice for Surface Cleaning Concrete for Coating; 2023.
- C. SSPC-SP 1 - Solvent Cleaning; 2015, with Editorial Revision (2016).
- D. SSPC-SP 2 - Hand Tool Cleaning; 2024.
- E. SSPC-SP 3 - Power Tool Cleaning; 2024.
- F. SSPC-SP 6 - Commercial Blast Cleaning 2007.
- G. SSPC-SP 13 - Surface Preparation of Concrete 1997 (Reaffirmed 2003).

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide complete list of products to be used, with the following information for each:
 - 1. Manufacturer's name, product name and/or catalog number, and general product category (e.g. "alkyd enamel").

2. Cross-reference to specified paint system(s) product is to be used in; include description of each system.
3. Manufacturer's installation instructions.
- C. Samples: Submit TWO paper "draw down" samples, 8" X 11" in size, and illustrating range of colors available for each finishing product specified.
 1. Where sheen is specified, submit samples in only that sheen.
- D. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 016000 - Product Requirements, for additional provisions.
 2. Extra Paint and Finish Materials: 1 gallon (4 L) of each color; from the same product run, store where directed.
 3. Label each container with color in addition to the manufacturer's label.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified, with minimum three years documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified with minimum three years' experience and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees Fahrenheit and a maximum of 90 degrees Fahrenheit, in ventilated area, and as required by manufacturer's instructions.
- D. FIELD CONDITIONS
 1. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
 2. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
 3. Provide lighting level of 80 ft candles (860 lx) measured mid-height at substrate surface.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Provide paints and finishes from the same manufacturer to the greatest extent possible.
 1. In the event that a single manufacturer cannot provide specified products, minor exceptions will be permitted provided approval by Architect is obtained using the specified procedures for substitutions.
 - a. Basis-of-Design Product: Painting and coating products manufactured by
 - 1) Sherwin-Williams Company: www.protective.sherwin-williams.com/industries/#sle.
 - b. Paints:
 - 1) Benjamin Moore Paints; benjaminmoore.com.
 - 2) PPG Paints: www.ppgpaints.com

2.02 PAINTS AND FINISHES - GENERAL

- A. Paints and Finishes: Ready mixed, unless intended to be a field-catalyzed paint.
 1. Provide paints and finishes of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.

2. Provide materials that are compatible with one another and the substrates indicated under conditions of service and application, as demonstrated by manufacturer based on testing and field experience.
 3. Supply each paint material in quantity required to complete entire project's work from a single production run.
 4. Do not reduce, thin, or dilute paint or finishes or add materials.
- B. Volatile Organic Compound (VOC) Content: Comply with Section 016116.
- C. Flammability: Comply with applicable code for surface burning characteristics.
- D. Sheens: Provide the sheens specified; where sheen is not specified, sheen will be selected later by Architect from the manufacturer's full line.
- E. Colors: To be selected from manufacturer's full range of available colors.
1. Selection to be made by Architect after award of contract.
 2. Extend colors to surface edges; colors may change at any edge as directed by Architect.
 3. In finished areas, finish pipes, ducts, conduit, and equipment the same color as the wall/ceiling they are mounted on/under.
 4. In utility areas, finish equipment, piping, conduit, and exposed duct work in colors according to the color coding scheme indicated.

2.03 PAINT SYSTEMS - INTERIOR

- A. Paint I-OP - Interior Surfaces to be Painted, Unless Otherwise Indicated: Including gypsum board, concrete, concrete masonry units, brick, wood, plaster, uncoated steel, shop primed steel, galvanized steel and aluminum.
1. Two top coats and one coat primer.
 2. Top Coat(s): High Performance Architectural Interior Latex.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial DTM B66 Series or Scuff Tuff S24 Series (drywall high traffic)
 - 2) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1110 Series, Satin.
 3. Top Coat(s): Institutional Low Odor/VOC Interior Latex.
 - a. Products:
 - 1) Sherwin Williams - ProMar 200 Zero B20 Series
 - 2) PPG Paints Speed-hide zero Latex, 6-4410XI Series, Satin.
 4. Top Coat Sheen:
 - a. Satin: MPI gloss level 4; use this sheen for items subject to frequent touching by occupants, including door frames and railings.
 - b. Semi-Gloss: MPI gloss level 5; use this sheen at all locations.
 5. Primer: As recommended by top coat manufacturer for specific substrate.
- B. Paint I-OP-MD-DT - Medium Duty Door/Trim: For surfaces subject to frequent contact by occupants, including metals and wood:
1. Two top coats and one coat primer.
 2. Top Coat(s): High Performance Architectural Interior Latex.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial DTM B66 Series Satin
 - 2) Sherwin Williams - Pro Industrial DTM B66 Series Semi-Gloss
 - 3) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1110 Series, Satin.
 - 4) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1210 Series, Semi-Gloss.
 3. Top Coat Sheen:
 - a. Satin: MPI gloss level 4; use this sheen at all locations.
 - b. Semi-Gloss: MPI gloss level 5; use this sheen at all locations.
 4. Primer: As recommended by top coat manufacturer for specific substrate.

- C. Paint I-OP-MD-WC - Medium Duty Vertical and Overhead: Including gypsum board, plaster, concrete, concrete masonry units, uncoated steel, shop primed steel, galvanized steel and aluminum.
 - 1. Two top coats and one coat primer.
 - 2. Top Coat(s): Interior Light Industrial Coating, Water Based.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial DTM B66 Series Satin
 - 2) Sherwin Williams - Pro Industrial DTM B66 Series Semi-Gloss
 - 3) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1110 Series, Satin.
 - 4) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1210 Series, Semi-Gloss.
 - 3. Primer: As recommended by top coat manufacturer for specific substrate.
- D. Paint I-OP-DF - Dry Fall: Metals; exposed structure and overhead-mounted services in utilitarian spaces, including shop primed steel deck, structural steel, metal fabrications, galvanized ducts, galvanized conduit, galvanized piping.
 - 1. Shop primer by others.
 - 2. Top Coat: Water Based Dry Fall for Galvanized Steel.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial Waterborne Dryfall B42 Flat
 - 2) Sherwin Williams - Pro Industrial Waterborne Dryfall B42 SG
 - 3) PPG Paints Speed hide Super Tech Water Based Interior Dry-Fog, 6-735XI, Flat.
 - 4) PPG Paints Speed hide Super Tech Water Based Interior Dry-Fog, 6-727XI, Semi-Gloss.
 - 3. Primer: As recommended by top coat manufacturer for specific substrate.
- E. Paint I-TR-C - Transparent Finish on Concrete Floors.
 - 1. 2 coats sealer.
 - 2. Sealer: Water Based for Concrete Floors; MPI #99.
 - a. Products:
 - 1) Sherwin Williams – H&C Clarishield Sealer
 - 2) PPG Paints Perma-Crete Plex-Seal WB Interior/Exterior Clear Sealer Stain, 4-6200. (MPI #99)

2.04 PRIMERS

- A. Primers: Provide the following unless other primer is required or recommended by manufacturer of top coats.
 - 1. Alkali Resistant Water Based Primer.
 - a. Products:
 - 1) Sherwin Williams – Loxon & Masonry Primer LX02
 - 2) PPG Paints Perma-Crete Interior/Exterior Alkali Resistant Primer, 4-603 Series.
 - 2. Interior Institutional Low Odor/VOC Primer Sealer.
 - a. Products:
 - 1) Sherwin Williams – ProMar 200 Zero Primer B28
 - 2) PPG Paints Speed hide zero Interior Latex Sealer, 6-4900XI.
 - 3. Interior/Exterior Latex Block Filler.
 - a. Products:
 - 1) Sherwin Williams – PrepRite Block Filler B25 Series
 - 2) PPG Paints Speed hide Masonry Hi Fill Latex Block Filler, 6-15.
 - 4. Interior Latex Primer Sealer.
 - a. Products:
 - 1) Sherwin Williams – ProMar 200 Zero Primer B28
 - 2) PPG Paints Speed hide Interior Latex Sealer, 6-2.
 - 5. Interior Drywall Primer Sealer.

- a. Products:
 - 1) Sherwin Williams - ProMar 200 Zero Primer B28
 - 2) PPG Paints Speed hide Interior Latex Sealer, 6-2.
- 6. Anti-Corrosive Alkyd Primer for Metal.
 - a. Products:
 - 1) Sherwin Williams – ProCryl Universal Metal Primer B66-310
 - 2) PPG Devguard Multi-Purpose Primer, 4160 Series.
- 7. Interior/Exterior Quick Dry Alkyd Primer for Metal.
 - a. Products:
 - 1) Sherwin Williams – ProCryl Universal Metal Primer B66-310
 - 2) PPG Devguard Multi-Purpose Primer, 4160 Series.
- 8. Interior Water Based Primer for Galvanized Metal.
 - a. Products:
 - b. Sherwin Williams – Pro Industrial DTM Primer Finish B66 Series
 - c. PPG Paints Pitt-Tech plus DTM Industrial Primer, 90-912 Series.

2.05 ACCESSORY MATERIALS

- A. Accessory Materials: Provide primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials as required for final completion of painted surfaces.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin application of paints and finishes until substrates have been properly prepared.
- B. Verify that surfaces are ready to receive work as instructed by the product manufacturer.
- C. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially effect proper application.
- D. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- E. Test shop-applied primer for compatibility with subsequent cover materials.
- F. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
 - 1. Gypsum Wallboard: 12 percent.
 - 2. Plaster and Stucco: 12 percent.
 - 3. Masonry, Concrete, and Concrete Masonry Units: 12 percent.
 - 4. Concrete Floors and Traffic Surfaces: 8 percent.

3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Remove or repair existing paints or finishes that exhibit surface defects.
- D. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- E. Seal surfaces that might cause bleed through or staining of topcoat.
- F. Concrete:
 - 1. Remove release agents, curing compounds, efflorescence, and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces to be coated exceeds that permitted in manufacturer's written instructions.

2. Clean concrete according to ASTM D4258. Allow to dry.
 3. Prepare surface as recommended by top coat manufacturer and according to SSPC-SP 13.
- G. Masonry:
1. Remove efflorescence and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces or if alkalinity of mortar joints exceed that permitted in manufacturer's written instructions. Allow to dry.
 2. Prepare surface as recommended by top coat manufacturer.
- H. Concrete Floors and Traffic Surfaces: Remove contamination, acid etch, and rinse floors with clear water. Verify required acid-alkali balance is achieved. Allow to dry.
- I. Gypsum Board: Fill minor defects with filler compound. Spot prime defects after repair.
- J. Galvanized Surfaces:
1. Remove surface contamination and oils and wash with solvent according to SSPC-SP 1.
 2. Prepare surface according to SSPC-SP 2.
- K. Ferrous Metal:
1. Solvent clean according to SSPC-SP 1.
 2. Shop-Primed Surfaces: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces. Re-prime entire shop-primed item.
 3. Remove rust, loose mill scale, and other foreign substances using methods recommended in writing by paint manufacturer and blast cleaning according to SSPC-SP 6 "Commercial Blast Cleaning". Protect from corrosion until coated.

3.03 APPLICATION

- A. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components and paint separately.
- B. Apply products in accordance with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual".
- C. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- D. Apply each coat to uniform appearance in thicknesses specified by manufacturer.
- E. Dark Colors and Deep Clear Colors: Regardless of number of coats specified, apply as many coats as necessary for complete hide.
- F. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- G. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.04 CLEANING

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.05 PROTECTION

- A. Protect finishes until completion of project.
- B. Touch-up damaged finishes after Substantial Completion.

END OF SECTION

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase)



PROJECT: _____ SUBSTITUTION
REQUEST NUMBER: _____

FROM: _____

TO: _____ DATE: _____

A/E PROJECT NUMBER: _____

RE: _____ CONTRACT FOR: _____

SPECIFICATION TITLE: _____ DESCRIPTION: _____

SECTION: _____ PAGE: _____ ARTICLE/PARAGRAPH: _____

PROPOSED SUBSTITUTION: _____

MANUFACTURER: _____ ADDRESS: _____ PHONE: _____

TRADE NAME: _____ MODEL NO.: _____

INSTALLER: _____ ADDRESS: _____ PHONE: _____

HISTORY: ☐ New Product ☐ 1-4 years old ☐ 5-10 years old ☐ More than 10 years old

DIFFERENCES BETWEEN PROPOSED SUBSTITUTION AND SPECIFIED PRODUCT: _____

☐ Point-by-point comparative data attached — REQUIRED BY A/E

REASON FOR NOT PROVIDING SPECIFIED ITEM: _____

SIMILAR INSTALLATION:

PROJECT: _____ ARCHITECT: _____

ADDRESS: _____ OWNER: _____

DATE INSTALLED: _____

PROPOSED SUBSTITUTION AFFECTS OTHER PARTS OF WORK: ☐ No ☐ Yes; explain _____

SAVINGS TO OWNER FOR ACCEPTING SUBSTITUTION:

PROPOSED SUBSTITUTION CHANGES CONTRACT TIME: ☐ No ☐ Yes [Add] [Deduct] _____ days.

SUPPORTING DATA ATTACHED: ☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports ☐ _____

CONTINUE ON NEXT PAGE

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase—Continued)



The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
- Same warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent are to be waived.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all respects.

SUBMITTED BY: _____

SIGNED BY: _____

FIRM: _____

ADDRESS: _____

TELEPHONE: _____

☐ **Attachments**

A/E's REVIEW AND RECOMMENDATION:

- ☐ Approve Substitution—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Approve Substitution as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Reject Substitution—Use specified materials.
- ☐ Substitution Request received too late—Use specified materials.

SIGNED BY: _____

DATE: _____

OWNER'S REVIEW AND ACTION:

- ☐ Substitution approved—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order
- ☐ Substitution approved as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order.
- ☐ Substitution rejected—Use specified materials.

SIGNED BY: _____

DATE: _____

ADDITIONAL COMMENTS:

☐

Contractor

☐

Subcontractor

☐

Supplier

☐

Manufacturer

☐

A/E

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase)



PROJECT: _____ SUBSTITUTION REQUEST NUMBER: _____

FROM: _____

TO: _____ DATE: _____

A/E PROJECT NUMBER: _____

RE: _____ CONTRACT FOR: _____

SPECIFICATION TITLE: _____ DESCRIPTION: _____

SECTION: _____ PAGE: _____ ARTICLE/PARAGRAPH: _____

PROPOSED SUBSTITUTION: _____

MANUFACTURER: _____ ADDRESS: _____ PHONE: _____

TRADE NAME: _____ MODEL NO.: _____

INSTALLER: _____ ADDRESS: _____ PHONE: _____

HISTORY: ☐ New Product ☐ 1-4 years old ☐ 5-10 years old ☒ More than 10 years old

DIFFERENCES BETWEEN PROPOSED SUBSTITUTION AND SPECIFIED PRODUCT: _____

☐ Point-by-point comparative data attached — REQUIRED BY A/E

REASON FOR NOT PROVIDING SPECIFIED ITEM: _____

SIMILAR INSTALLATION:

PROJECT: _____ ARCHITECT: _____

ADDRESS: _____ OWNER: _____

DATE INSTALLED: _____

PROPOSED SUBSTITUTION AFFECTS OTHER PARTS OF WORK: ☐ No ☐ Yes; explain _____

SAVINGS TO OWNER FOR ACCEPTING SUBSTITUTION:

PROPOSED SUBSTITUTION CHANGES CONTRACT TIME: ☐ No ☐ Yes [Add] [Deduct] _____ days.

SUPPORTING DATA ATTACHED: ☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports ☐ _____

CONTINUE ON NEXT PAGE

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase—Continued)



The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
- Same warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent are to be waived.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all respects.

SUBMITTED BY: _____
SIGNED BY: _____
FIRM: _____
ADDRESS: _____
TELEPHONE: _____
☐ Attachments

A/E's REVIEW AND RECOMMENDATION:

- ☐ Approve Substitution—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Approve Substitution as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Reject Substitution—Use specified materials.
- ☐ Substitution Request received too late—Use specified materials.

SIGNED BY:

DATE:

OWNER'S REVIEW AND ACTION:

- ☐ Substitution approved—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order
- ☐ Substitution approved as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order.
- ☐ Substitution rejected—Use specified materials.

SIGNED BY:

DATE:

ADDITIONAL COMMENTS: ☐ Contractor ☐ Subcontractor ☐ Supplier ☐ Manufacturer ☐ A/E

**SECTION 00 3100
AVAILABLE PROJECT INFORMATION**

PART 1 GENERAL

1.01 EXISTING CONDITIONS

- A. Certain information relating to existing surface and subsurface conditions and structures is available to bidders but will not be part of Contract Documents, as follows:
- B. Geotechnical Report: Entitled Geotechnical Investigation for the proposed Gossner Foods Retail Chalet and Learning Lodge, dated May 15, 2026.
 - 1. Original copy is attached at the end of this section .
 - 2. This report identifies properties of below grade conditions and offers recommendations for the design of foundations, prepared primarily for the use of Architect.
 - 3. This report, by its nature, cannot reveal all conditions that exist on the site. Should subsurface conditions be found to vary substantially from this report, changes in the design and construction of foundations will be made, with resulting credits or expenditures to the Contract Price accruing to Owner.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

Gossner Foods

SECTION 00 4325
SUBSTITUTION REQUEST FORM - DURING PROCUREMENT
SEE ATTACHED DOCUMENT
END OF SECTION

This page intentionally left blank

Gossner Foods

SECTION 00 6325
SUBSTITUTION REQUEST FORM - DURING CONSTRUCTION
SEE ATTACHED FORM
END OF SECTION

This page intentionally left blank

**SECTION 01 1000
SUMMARY**

PART 1 GENERAL

1.01 PROJECT

- A. Project Name: 826333 - DFCM Hardware Ranch Refresh
- B. Owner's Name: Gossner Foods
- C. Architect's Name: Design West Architects.
- D. The Project consists of the construction of a new retail location with a learning and interactive experiential component in the building.

1.02 OWNER OCCUPANCY

- A. Owner intends to occupy the Project upon Substantial Completion.
- B. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- C. Schedule the Work to accommodate Owner occupancy.

1.03 CONTRACTOR USE OF SITE AND PREMISES

- A. Provide access to and from site as required by law and by Owner:
 - 1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
 - 2. Do not obstruct roadways, sidewalks, or other public ways without permit.
- B. Utility Outages and Shutdown:
 - 1. Prevent accidental disruption of utility services to other facilities.

1.04 WORK SEQUENCE

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 2000
PRICE AND PAYMENT PROCEDURES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Change procedures.
- C. Correlation of CMGC Contractor submittals based on changes.

1.02 SCHEDULE OF VALUES

- A. Use Schedule of Values Form: AIA G703, edition stipulated in the Agreement.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit draft to Architect for approval.
- C. Forms filled out by hand will not be accepted.

1.03 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Use Form AIA G702 and Form AIA G703, edition stipulated in the Agreement.
- C. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to Architect for approval.
- D. Forms filled out by hand will not be accepted.
- E. Execute certification by signature of authorized officer.
- F. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of work performed and for stored products.
- G. List each authorized Change Order as a separate line item, listing Change Order number and dollar amount as for an original item of work.
- H. Submit one electronic and three hard-copies of each Application for Payment.

1.04 MODIFICATION PROCEDURES

- A. Submit name of the individual authorized to receive change documents and who will be responsible for informing others in CMGC Contractor 's employ or subcontractors of changes to Contract Documents.
- B. For minor changes not involving an adjustment to the Contract Sum or Contract Time, Architect will issue instructions directly to CMGC Contractor .
- C. For other required changes, Architect will issue a document signed by Owner instructing CMGC Contractor to proceed with the change, for subsequent inclusion in a Change Order.
 - 1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
 - 2. Promptly execute the change.
- D. For changes for which advance pricing is desired, Architect will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. CMGC Contractor shall prepare and submit a fixed price quotation within 5 days.
- E. CMGC Contractor may propose a change by submitting a request for change to Architect, describing the proposed change and its full effect on the work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation. Document any requested substitutions in accordance with Section 01 6000.

- F. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
- G. Substantiation of Costs: Provide full information required for evaluation.
 - 1. On request, provide the following data:
 - a. Quantities of products, labor, and equipment.
 - b. Taxes, insurance, and bonds.
 - c. Overhead and profit.
 - d. Justification for any change in Contract Time.
 - e. Credit for deletions from Contract, similarly documented.
 - 2. Support each claim for additional costs with additional information:
 - 3. For Time and Material work, submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract.
- H. Execution of Change Orders: Architect will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- I. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- J. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust times for other items of work affected by the change, and resubmit.
- K. Promptly enter changes in Project Record Documents.

1.05 APPLICATION FOR FINAL PAYMENT

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

**SECTION 01 2100
ALLOWANCES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Contingency allowance.
- B. Inspecting and testing allowances.

1.02 RELATED REQUIREMENTS

- A. Section 01 2000 - Price and Payment Procedures: Additional payment and modification procedures.

1.03 CONTINGENCY ALLOWANCE

- A. Funds will be drawn from the Contingency Allowance only by approved Proposal Request or Change Order.
- B. At closeout of Contract, funds remaining in Contingency Allowance and the overhead and profit on the contingency from the CMGC will be credited to Owner by Change Order.

1.04 INSPECTING AND TESTING ALLOWANCES

1.05 ALLOWANCES SCHEDULE

- A. Contingency Allowance: Include the stipulated sum/price of 5% of GMP for use upon Owner's instructions.
- B. Inspecting and Testing Allowance: Include the sum of \$_____ for payment of inspecting services specified in Section 01 4000 - Quality Requirements.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 2300
ALTERNATES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Description of Alternates.

1.02 RELATED REQUIREMENTS

- A. Document 00 2113 - Instructions to Bidders: Instructions for preparation of pricing for Alternates.

1.03 SCHEDULE OF BID ALTERNATES

- A. Bid Alternate No. 1 - Demo carpet in museum. Grind floor and add self leveler to provide a smooth surface for carpet installation. Install new carpet.

1.04 SCHEDULE OF APPROVED MATERIAL ALTERNATES

- A. Material Alternate No. 1 -
 - 1. Basis of Design: Fluid-applied weather barrier on specified sheathing - see section 07 2500
 - 2. Alternate Item: Factory applied integral weather barrier on sheathing (Zip System Wall Sheathing or equal).

PART 2 PRODUCTS

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 2500
SUBSTITUTION PROCEDURES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedural requirements for proposed substitutions.

1.02 DEFINITIONS

- A. Substitutions: Changes from Contract Documents requirements proposed by CMGC Contractor to materials, products, assemblies, and equipment.
 - 1. Substitutions for Cause: Proposed due to changed Project circumstances beyond CMGC Contractor 's control.
 - a. Unavailability.
 - b. Regulatory changes.
 - 2. Substitutions for Convenience: Proposed due to possibility of offering substantial advantage to the Project only will be considered during bidding.
 - a. Substitution requests offering advantages solely to the CMGC Contractor will not be considered.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 GENERAL REQUIREMENTS

- A. A Substitution Request for products, assemblies, materials, and equipment constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product, equipment, assembly, or system.
 - 2. Agrees to provide the same warranty for the substitution as for the specified product.
 - 3. Agrees to provide same or equivalent maintenance service and source of replacement parts, as applicable.
 - 4. Agrees to coordinate installation and make changes to other work that may be required for the work to be complete, with no additional cost to Owner.
 - 5. Waives claims for additional costs or time extension that may subsequently become apparent.
 - 6. Agrees to reimburse Owner and Architect for review or redesign services associated with re-approval by authorities.
- B. A Substitution Request for specified installer constitutes a representation that the submitter:
 - 1. Has acted in good faith to obtain services of specified installer, but was unable to come to commercial, or other terms.
- C. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents. Burden of proof is on proposer.
- D. Content: Include information necessary for tracking the status of each Substitution Request, and information necessary to provide an actionable response.
 - 1. Forms indicated in the Project Manual must be used. Information below that is not included in the form should be provided in addition to the form:
 - a. Project Information:
 - 1) Official project name and number, and any additional required identifiers established in Contract Documents.
 - (a) Owner's, Architect's, and Contractor 's names.
 - 2) Substitution Request Information:
 - (a) Discrete and consecutive Substitution Request number, and descriptive subject/title.
 - (b) Indication of whether the substitution is for cause or convenience. Issue date.

- (c) Reference to particular Contract Document(s) specification section number, title, and article/paragraph(s).
 - (d) Description of Substitution.
 - (e) Reason why the specified item cannot be provided.
 - (f) Differences between proposed substitution and specified item.
 - (g) Description of how proposed substitution affects other parts of work.[_____].
 - 3) Attached Comparative Data: Provide point-by-point, side-by-side comparison addressing essential attributes specified, as appropriate and relevant for the item:
 - (a) Physical characteristics.
 - (b) In-service performance.
 - (c) Expected durability.
 - (d) Visual effect.
 - (e) Warranties.
 - (f) Other salient features and requirements.
 - (g) Include, as appropriate or requested, the following types of documentation:
 - (1) Product Data: Samples, Certificates, test, reports or similar qualification data.
 - (2) Drawings, when required to show impact on adjacent construction elements.[_____].
 - (3) Impact of Substitution:
 - (4) Savings to Owner for accepting substitution.
 - (5) Change to Contract Time due to accepting substitution.
2. No specific form is required. CMGC Contractor 's Substitution Request documentation must include the following:
- a. Project Information:
 - 1) Official project name and number, and any additional required identifiers established in Contract Documents.
 - b. Substitution Request Information:
 - 1) Discrete and consecutive Substitution Request number, and descriptive subject/title.
 - 2) Indication of whether the substitution is for cause or convenience.
 - 3) Issue date.
 - 4) Description of Substitution.
 - 5) Reason why the specified item cannot be provided.
 - 6) Differences between proposed substitution and specified item.
 - 7) Description of how proposed substitution affects other parts of work.
 - c. Attached Comparative Data: Provide point-by-point, side-by-side comparison addressing essential attributes specified, as appropriate and relevant for the item:
 - 1) Physical characteristics.
 - 2) In-service performance.
 - 3) Expected durability.
 - 4) Visual effect.
 - 5) Warranties.
 - 6) Other salient features and requirements.
 - 7) Include, as appropriate or requested, the following types of documentation:
 - (a) Product Data:
 - (b) Samples.
 - (c) Certificates, test, reports or similar qualification data.
 - d. Impact of Substitution:
 - 1) Savings to Owner for accepting substitution.
 - 2) Change to Contract Time due to accepting substitution.

E. Limit each request to a single proposed substitution item.

1. Submit an electronic document, combining the request form with supporting data into single document.

3.02 SUBSTITUTION PROCEDURES DURING PROCUREMENT

- A. Submittal Time Restrictions:
 1. Submit request for Substitution for Convenience immediately upon discovery of its potential advantage to the project, but not later than [7] days prior to time required for review and approval by Architect, in order to stay on approved bidding schedule.

3.03 SUBSTITUTION PROCEDURES DURING CONSTRUCTION

- A. Architect will consider requests for substitutions only within 15 days after date of Agreement.
- B. Submit request for Substitution for Cause within 14 days of discovery of need for substitution, but not later than 7 days prior to time required for review and approval by Architect, in order to stay on approved project schedule.
- C. Submit request for Substitution for Convenience are not permitted during construction.
- D. Substitutions will not be considered under one or more of the following circumstances:
 1. When they are indicated or implied on shop drawing or product data submittals, without having received prior approval.
 2. Without a separate written request during the bidding period.
- E. Failure to order product in a timely manner to meet project timeline requirements, does not constitute justification for a substitution. Any additional costs incurred related to obtaining the specified product in a expedited manner, as a result of this failure, will not be approved in Change Orders and are the responsibility of the ordering party.

3.04 RESOLUTION

- A. Architect may request additional information and documentation prior to rendering a decision. Provide this data in an expeditious manner.
- B. Architect will notify CMGC Contractor in writing of decision to accept or reject request.
 1. Architect's decision following review of proposed substitution will be noted on the submitted form.

3.05 ACCEPTANCE

- A. Accepted substitutions change the work of the Project. They will be documented and incorporated into work of the project by Change Order, Construction Change Directive, Architectural Supplementary Instructions, or similar instruments provided for in the Conditions of the Contract.

3.06 CLOSEOUT ACTIVITIES

- A. See Section 01 7800 - Closeout Submittals, for closeout submittals.

END OF SECTION

This page intentionally left blank

**SECTION 01 3000
ADMINISTRATIVE REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General administrative requirements.
- B. Electronic document submittal service.
- C. Preconstruction meeting.
- D. Site mobilization meeting.
- E. Progress meetings.
- F. Progress photographs.
- G. Coordination drawings.
- H. Submittals for review, information, and project closeout.
- I. Number of copies of submittals.
- J. Requests for Interpretation (RFI) procedures.
- K. Submittal procedures.

1.02 GENERAL ADMINISTRATIVE REQUIREMENTS

- A. Comply with requirements of Section 01 7000 - Execution and Closeout Requirements for coordination of execution of administrative tasks with timing of construction activities.
- B. Make the following types of submittals to Architect:
 - 1. Requests for Interpretation (RFI).
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.
 - 5. Manufacturer's instructions and field reports.
 - 6. Applications for payment and change order requests.
 - 7. Progress schedules.
 - 8. Coordination drawings.
 - 9. Correction Punch List and Final Correction Punch List for Substantial Completion.
 - 10. Closeout submittals.

1.03 PROJECT COORDINATOR

- A. Project Coordinator: Construction Manager.
- B. Cooperate with the Project Coordinator in allocation of mobilization areas of site; for field offices and sheds, for access, traffic, and parking facilities.
- C. During construction, coordinate use of site and facilities through the Project Coordinator.
- D. Comply with Project Coordinator's procedures for intra-project communications; submittals, reports and records, schedules, coordination drawings, and recommendations; and resolution of ambiguities and conflicts.
- E. Comply with instructions of the Project Coordinator for use of temporary utilities and construction facilities. Responsibility for providing temporary utilities and construction facilities is identified in Section 01 1000 - Summary.
- F. Coordinate field engineering and layout work under instructions of the Project Coordinator.
- G. Make the following types of submittals to Architect through the Project Coordinator:
 - 1. Requests for Interpretation.
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.

5. Design data.
6. Manufacturer's instructions and field reports.
7. Applications for payment and change order requests.
8. Progress schedules.
9. Coordination drawings.
10. Correction Punch List and Final Correction Punch List for Substantial Completion.
11. Closeout submittals.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 ELECTRONIC DOCUMENT SUBMITTAL SERVICE

- A. All documents transmitted for purposes of administration of the contract are to be in electronic (PDF) format, as appropriate to the document, and transmitted via an Internet-based submittal service that receives, logs and stores documents, provides electronic stamping and signatures, and notifies addressees via email.
 1. Besides submittals for review, information, and closeout, this procedure applies to Requests for Interpretation (RFIs), progress documentation, contract modification documents (e.g. supplementary instructions, change proposals, change orders), applications for payment, field reports and meeting minutes, CMGC Contractor's correction punchlist, and any other document any participant wishes to make part of the project record.
 2. CMGC Contractor and Architect are required to use this service.
 3. It is CMGC Contractor's responsibility to submit documents in allowable format.
 4. Subcontractors, suppliers, and Architect's consultants will be permitted to use the service at no extra charge.
 5. Users of the service need an email address, internet access, and PDF review software that includes ability to mark up and apply electronic stamps (such as Adobe Acrobat, www.adobe.com, or Bluebeam PDF Revu, www.bluebeam.com), unless such software capability is provided by the service provider.
 6. Paper document transmittals will not be reviewed; emailed electronic documents will not be reviewed.
 7. All other specified submittal and document transmission procedures apply, except that electronic document requirements do not apply to samples or color selection charts.
- B. Submittal Service: The selected service is:
 1. Procore: www.procore.com.
- C. Training: One, one-hour, web-based training session will be arranged for all participants, with representatives of Architect and CMGC Contractor participating; further training is the responsibility of the user of the service.
- D. Project Closeout: Architect will determine when to terminate the service for the project and is responsible for obtaining archive copies of files for Owner.

3.02 PRECONSTRUCTION MEETING

- A. Project Coordinator will schedule a meeting after Notice to Proceed.
- B. Attendance Required:
 1. Owner.
 2. Architect.
 3. CMGC Contractor .
 4. Invited Sub-Contractors.
- C. Agenda:
 1. Submission of list of subcontractors, list of products, schedule of values, and progress schedule.
 2. Submission of initial Submittal schedule.

3. Designation of personnel representing the parties to Contract, None - N/A and <1|A/E|>.
 4. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
 5. Scheduling.
- D. Record minutes and distribute copies within four days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

3.03 SITE MOBILIZATION MEETING

- A. Project Coordinator will schedule meeting at the Project site prior to CMGC Contractor occupancy.
- B. Attendance Required:
1. CMGC Contractor .
 2. Architect.
 3. CMGC Contractor 's superintendent.
 4. Major subcontractors.
- C. Agenda:
1. Use of premises by Owner and CMGC Contractor .
 2. Owner's requirements.
 3. Construction facilities and controls provided by Owner.
 4. Temporary utilities provided by Owner.
 5. Survey and building layout.
 6. Security and housekeeping procedures.
 7. Schedules.
 8. Application for payment procedures.
 9. Procedures for testing.
 10. Procedures for maintaining record documents.
 11. Requirements for start-up of equipment.
 12. Inspection and acceptance of equipment put into service during construction period.
- D. Record minutes and distribute copies within four days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

3.04 PROGRESS MEETINGS

- A. Schedule and administer meetings throughout progress of the work at maximum weekly intervals.
- B. Make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.
- C. Attendance Required:
1. CMGC Contractor .
 2. Owner.
 3. Architect.
 4. CMGC Contractor 's superintendent.
 5. Major subcontractors.
- D. Agenda:
1. Review minutes of previous meetings.
 2. Review of work progress.
 3. Field observations, problems, and decisions.
 4. Identification of problems that impede, or will impede, planned progress.
 5. Review of submittals schedule and status of submittals.
 6. Review of RFIs log and status of responses.
 7. Maintenance of progress schedule.
 8. Corrective measures to regain projected schedules.

9. Planned progress during succeeding work period.
 10. Coordination of projected progress.
 11. Maintenance of quality and work standards.
 12. Effect of proposed changes on progress schedule and coordination.
 13. Other business relating to work.
- E. Record minutes and distribute copies within four days after meeting to participants, with copies to Architect, Owner, participants, and those affected by decisions made.

3.05 CONSTRUCTION PROGRESS SCHEDULE

- A. If preliminary schedule requires revision after review, submit revised schedule within 10 days.
- B. Within 20 days after review of preliminary schedule, submit draft of proposed complete schedule for review.
 1. Include written certification that major contractors have reviewed and accepted proposed schedule.
- C. Within 10 days after joint review, submit complete schedule.
- D. Submit updated schedule with each Application for Payment.

3.06 PROGRESS PHOTOGRAPHS

- A. Maintain one set of all photographs at project site for reference; same copies as submitted, identified as such.
- B. Photography Type: Digital; electronic files.
- C. Digital Photographs: 24 bit color, minimum resolution of 1024 by 768, in JPG format; provide files unaltered by photo editing software.
 1. Delivery Medium: Via email.
 2. File Naming: Include project identification, date and time of view, and view identification.
 3. PDF File: Assemble all photos into printable pages in PDF format, with 2 to 3 photos per page, each photo labeled with file name; one PDF file per submittal.

3.07 COORDINATION DRAWINGS

- A. Provide information required by Project Coordinator for preparation of coordination drawings.
- B. Review drawings prior to submission to Architect.

3.08 REQUESTS FOR INTERPRETATION(RFI)

- A. Definition: A request seeking one of the following:
 1. An interpretation, amplification, or clarification of some requirement of Contract Documents arising from inability to determine from them the exact material, process, or system to be installed; or when the elements of construction are required to occupy the same space (interference); or when an item of work is described differently at more than one place in Contract Documents.
 2. A resolution to an issue which has arisen due to field conditions and affects design intent.
- B. Whenever possible, request clarifications at the next appropriate project progress meeting, with response entered into meeting minutes, rendering unnecessary the issuance of a formal RFI.
- C. Preparation: Prepare an RFI immediately upon discovery of a need for interpretation of Contract Documents. Failure to submit a RFI in a timely manner is not a legitimate cause for claiming additional costs or delays in execution of the work.
 1. Prepare a separate RFI for each specific item.
 - a. Review, coordinate, and comment on requests originating with subcontractors and/or materials suppliers.
 - b. Do not forward requests which solely require internal coordination between subcontractors.
 2. Prepare using an electronic version of the form appended to this section.
 3. Prepare using software provided by the Electronic Document Submittal Service.

4. Combine RFI and its attachments into a single electronic file. PDF format is preferred.
- D. Reason for the RFI: Prior to initiation of an RFI, carefully study all Contract Documents to confirm that information sufficient for their interpretation is definitely not included.
- E. Content: Include identifiers necessary for tracking the status of each RFI, and information necessary to provide an actionable response.
 1. Official Project name and number, and any additional required identifiers established in Contract Documents.
 2. Owner's, Architect's, and CMGC Contractor 's names.
 3. Discrete and consecutive RFI number, and descriptive subject/title.
 4. Issue date, and requested reply date.
 5. Reference to particular Contract Document(s) requiring additional information/interpretation. Identify pertinent drawing and detail number and/or specification section number, title, and paragraph(s).
 6. Annotations: Field dimensions and/or description of conditions which have engendered the request.
 7. CMGC Contractor 's suggested resolution: A written and/or a graphic solution, to scale, is required in cases where clarification of coordination issues is involved, for example; routing, clearances, and/or specific locations of work shown diagrammatically in Contract Documents. If applicable, state the likely impact of the suggested resolution on Contract Time or the Contract Sum.
- F. Attachments: Include sketches, coordination drawings, descriptions, photos, submittals, and other information necessary to substantiate the reason for the request.
- G. RFI Log: Prepare and maintain a tabular log of RFIs for the duration of the project.
 1. Indicate current status of every RFI. Update log promptly and on a regular basis.
 2. Note dates of when each request is made, and when a response is received.
 3. Highlight items requiring priority or expedited response.
 4. Highlight items for which a timely response has not been received to date.
 5. Identify and include improper or frivolous RFIs.
- H. Review Time: Architect will respond and return RFIs to CMGC Contractor within seven calendar days of receipt. For the purpose of establishing the start of the mandated response period, RFIs received after 12:00 noon will be considered as having been received on the following regular working day.
 1. Response period may be shortened or lengthened for specific items, subject to mutual agreement, and recorded in a timely manner in progress meeting minutes.
- I. Responses: Content of answered RFIs will not constitute in any manner a directive or authorization to perform extra work or delay the project. If in CMGC Contractor 's belief it is likely to lead to a change to Contract Sum or Contract Time, promptly issue a notice to this effect, and follow up with an appropriate Change Order request to Owner.
 1. Response may include a request for additional information, in which case the original RFI will be deemed as having been answered, and an amended one is to be issued forthwith. Identify the amended RFI with an R suffix to the original number.
 2. Do not extend applicability of a response to specific item to encompass other similar conditions, unless specifically so noted in the response.
 3. Upon receipt of a response, promptly review and distribute it to all affected parties, and update the RFI Log.
 4. Notify Architect within seven calendar days if an additional or corrected response is required by submitting an amended version of the original RFI, identified as specified above.

3.09 SUBMITTAL SCHEDULE

- A. Submit to Architect for review a schedule for submittals in tabular format.

1. Format schedule to allow tracking of status of submittals throughout duration of construction.
2. Arrange information to include scheduled date for initial submittal, specification number and title, submittal category (for review or for information), description of item of work covered, and role and name of subcontractor.
3. Account for time required for preparation, review, manufacturing, fabrication and delivery when establishing submittal delivery and review deadline dates.
 - a. For assemblies, equipment, systems comprised of multiple components and/or requiring detailed coordination with other work, allow for additional time to make corrections or revisions to initial submittals, and time for their review.

3.10 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
 1. Product data.
 2. Shop drawings.
 3. Samples for selection.
 4. Samples for verification.
- B. Submit to Architect for review for the limited purpose of checking for compliance with information given and the design concept expressed in Contract Documents.
- C. Samples will be reviewed for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 01 7800 - Closeout Submittals.

3.11 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:
 1. Design data.
 2. Certificates.
 3. Test reports.
 4. Inspection reports.
 5. Manufacturer's instructions.
 6. Manufacturer's field reports.
 7. Other types indicated.
- B. Submit for Architect's knowledge as contract administrator or for Owner.

3.12 SUBMITTALS FOR PROJECT CLOSEOUT

- A. Submit Correction Punch List for Substantial Completion.
- B. Submit Final Correction Punch List for Substantial Completion.
- C. When the following are specified in individual sections, submit them at project closeout in compliance with requirements of Section 01 7800 - Closeout Submittals:
 1. Project record documents.
 2. Operation and maintenance data.
 3. Warranties.
 4. Bonds.
- D. Submit for Owner's benefit during and after project completion.

3.13 NUMBER OF COPIES OF SUBMITTALS

- A. Electronic Documents: Submit one electronic copy in PDF format; an electronically-marked up file will be returned. Create PDFs at native size and right-side up; illegible files will be rejected.
- B. Samples: Submit the number specified in individual specification sections; one of which will be retained by Architect.
 1. After review, produce duplicates.

2. Retained samples will not be returned to CMGC Contractor unless specifically so stated.

3.14 SUBMITTAL PROCEDURES

- A. General Requirements:
 1. Submit separate packages of submittals for review and submittals for information, when included in the same specification section.
 2. Sequentially identify each item. For revised submittals use original number and a sequential combination numerical and alphabetical suffix.
 3. Identify: Project; CMGC Contractor ; subcontractor or supplier; pertinent drawing and detail number; and specification section number and article/paragraph, as appropriate on each copy.
 4. Apply CMGC Contractor 's stamp, signed or initialed certifying that review, approval, verification of products required, field dimensions, adjacent construction work, and coordination of information is in accordance with the requirements of the work and Contract Documents.
 - a. Submittals from sources other than the CMGC Contractor , or without CMGC Contractor 's stamp will not be acknowledged, reviewed, or returned.
 5. Deliver each submittal on date noted in submittal schedule, unless an earlier date has been agreed to by all affected parties, and is of the benefit to the project.
 - a. Upload submittals in electronic form to Electronic Document Submittal Service website.
 6. Schedule submittals to expedite the Project, and coordinate submission of related items.
 - a. For each submittal for review, allow 15 days excluding delivery time to and from the CMGC Contractor .
 - b. For sequential reviews involving Architect's consultants, Owner, or another affected party, allow an additional 7 days.
 7. Identify variations from Contract Documents and product or system limitations that may be detrimental to successful performance of the completed work.
 8. Provide space for CMGC Contractor and Architect review stamps.
 9. When revised for resubmission, identify all changes made since previous submission.
 10. Incomplete submittals will not be reviewed, unless they are partial submittals for distinct portion(s) of the work, and have received prior approval for their use.
 11. Submittals not requested will be recognized, and will be returned "Not Reviewed",
- B. Product Data Procedures:
 1. Submit only information required by individual specification sections.
 2. Collect required information into a single submittal.
 3. Submit concurrently with related shop drawing submittal.
 4. Do not submit (Material) Safety Data Sheets for materials or products.
- C. Shop Drawing Procedures:
 1. Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting Contract Documents and coordinating related work.
 2. Generic, non-project-specific information submitted as shop drawings do not meet the requirements for shop drawings.
- D. Samples Procedures:
 1. Transmit related items together as single package.
 2. Identify each item to allow review for applicability in relation to shop drawings showing installation locations.

3.15 SUBMITTAL REVIEW

- A. Submittals for Review: Architect will review each submittal, and approve, or take other appropriate action.
- B. Submittals for Information: Architect will acknowledge receipt and review. See below for actions to be taken.

- C. Architect's actions will be reflected by marking each returned submittal using virtual stamp on electronic submittals.
- D. Architect's and consultants' actions on items submitted for review:
 - 1. Authorizing purchasing, fabrication, delivery, and installation:
 - a. "Approved as Noted, Resubmission not required", or language with same legal meaning.
 - 1) At CMGC Contractor 's option, submit corrected item, with review notations acknowledged and incorporated.
 - b. "Approved as Noted, Resubmit for Record", or language with same legal meaning.
 - 2. Not Authorizing fabrication, delivery, and installation:
 - a. "Revise and Resubmit".
 - 1) Resubmit revised item, with review notations acknowledged and incorporated.
 - b. "Rejected".
 - 1) Submit item complying with requirements of Contract Documents.
- E. Architect's and consultants' actions on items submitted for information:
 - 1. Items for which no action was taken:
 - a. "Received" - to notify the CMGC Contractor that the submittal has been received for record only.
 - 2. Items for which action was taken:
 - a. "Reviewed" - no further action is required from CMGC Contractor .

END OF SECTION

**SECTION 01 4000
QUALITY REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Submittals.
- B. Quality assurance.
- C. References and standards.
- D. Testing and inspection agencies and services.
- E. Control of installation.
- F. Mock-ups.
- G. Tolerances.
- H. Manufacturers' field services.
- I. Defect Assessment.

1.02 RELATED REQUIREMENTS

- A. Section 01 2100 - Allowances: Allowance for payment of testing services.
- B. Section 01 3000 - Administrative Requirements: Submittal procedures.
- C. Section 01 4216 - Definitions.

1.03 REFERENCE STANDARDS

- A. ASTM C1077 - Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation; 2026.
- B. ASTM C1093 - Standard Practice for Accreditation of Testing Agencies for Masonry; 2025.
- C. ASTM D3740 - Standard Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction; 2023.
- D. ASTM E329 - Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection; 2025b.
- E. ASTM E543 - Standard Specification for Agencies Performing Nondestructive Testing; 2026.
- F. IAS AC89 - Accreditation Criteria for Testing Laboratories; 2025.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Design Data: Submit for Architect's knowledge as contract administrator for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents, or for Owner's information.
- C. Test Reports: After each test/inspection, promptly submit two copies of report to Architect and to CMGC Contractor .
 - 1. Include:
 - a. Date issued.
 - b. Project title and number.
 - c. Name of inspector.
 - d. Date and time of sampling or inspection.
 - e. Identification of product and specifications section.
 - f. Location in the Project.
 - g. Type of test/inspection.
 - h. Date of test/inspection.
 - i. Results of test/inspection.
 - j. Compliance with Contract Documents.

- k. When requested by Architect, provide interpretation of results.
- 2. Test report submittals are for Architect's knowledge as contract administrator for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents, or for Owner's information.
- D. Certificates: When specified in individual specification sections, submit certification by the manufacturer and CMGC Contractor or installation/application subcontractor to Architect, in quantities specified for Product Data.
 - 1. Indicate material or product complies with or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
 - 2. Certificates may be recent or previous test results on material or product, but must be acceptable to Architect.
- E. Manufacturer's Instructions: When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, start-up, adjusting, and finishing, for the Owner's information. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.
- F. Manufacturer's Field Reports: Submit reports for Architect's benefit as contract administrator or for Owner.
 - 1. Submit report in duplicate within 30 days of observation to Architect for information.
 - 2. Submit for information for the limited purpose of assessing compliance with information given and the design concept expressed in the Contract Documents.

1.05 QUALITY ASSURANCE

- A. Testing Agency Qualifications:
 - 1. Prior to start of work, submit agency name, address, and telephone number, and names of full time registered Engineer and responsible officer.
 - 2. Qualification Statement: Provide documentation showing testing laboratory is accredited under IAS AC89.

1.06 REFERENCES AND STANDARDS

- A. For products and workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Comply with reference standard of date of issue current on date of Contract Documents, except where a specific date is established by applicable code.
- C. Obtain copies of standards where required by product specification sections.
- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- E. Should specified reference standards conflict with Contract Documents, request clarification from Architect before proceeding.
- F. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of Architect shall be altered from Contract Documents by mention or inference otherwise in any reference document.

1.07 TESTING AND INSPECTION AGENCIES AND SERVICES

- A. Owner will employ services of an independent testing agency to perform certain specified testing and inspection; payment for cost of services will be derived from allowance specified in Section 01 2100; see Section 01 2100 and applicable sections for description of services included in allowance.
- B. Owner will employ and pay for services of an independent testing agency to perform other specified testing.

- C. CMGC Contractor shall employ and pay for services of an independent testing agency to perform other specified testing.
- D. As indicated in individual specification sections, Owner or CMGC Contractor shall employ and pay for services of an independent testing agency to perform other specified testing.
- E. Employment of agency in no way relieves CMGC Contractor of obligation to perform Work in accordance with requirements of Contract Documents.
- F. CMGC Contractor Employed Agency:
 - 1. Laboratory: Authorized to operate in Utah.
 - 2. Laboratory Staff: Maintain a full time registered Engineer on staff to review services.
 - 3. Testing Equipment: Calibrated at reasonable intervals either by NIST or using an NIST established Measurement Assurance Program, under a laboratory measurement quality assurance program.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect before proceeding.
- D. Comply with specified standards as minimum quality for the work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

3.02 MOCK-UPS

- A. Accepted mock-ups establish the standard of quality the Architect will use to judge the Work.
- B. Notify Architect and None - N/A Consultant fifteen (15) working days in advance of dates and times when mock-ups will be constructed.
- C. Tests shall be performed under provisions identified in this section and identified in the respective product specification sections.
- D. Assemble and erect specified items with specified attachment and anchorage devices, flashings, seals, and finishes.
- E. Architect will use accepted mock-ups as a comparison standard for the remaining Work.
- F. Where mock-up has been accepted by Architect and is specified in product specification sections to be removed, protect mock-up throughout construction, remove mock-up and clear area when directed to do so by Architect.

3.03 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

3.04 TESTING AND INSPECTION

- A. Testing Agency Duties:
 - 1. Provide qualified personnel at site. Cooperate with Architect and CMGC Contractor in performance of services.
 - 2. Perform specified sampling and testing of products in accordance with specified standards.
 - 3. Ascertain compliance of materials and mixes with requirements of Contract Documents.
 - 4. Perform additional tests and inspections required by Architect.
 - 5. Submit reports of all tests/inspections specified.
- B. Limits on Testing/Inspection Agency Authority:
 - 1. Agency may not release, revoke, alter, or enlarge on requirements of Contract Documents.
 - 2. Agency may not approve or accept any portion of the Work.
 - 3. Agency may not assume any duties of CMGC Contractor .
 - 4. Agency has no authority to stop the Work.
- C. CMGC Contractor Responsibilities:
 - 1. Deliver to agency at designated location, adequate samples of materials proposed to be used that require testing, along with proposed mix designs.
 - 2. Cooperate with laboratory personnel, and provide access to the Work and to manufacturers' facilities.
 - 3. Provide incidental labor and facilities:
 - a. To provide access to Work to be tested/inspected.
 - b. To obtain and handle samples at the site or at source of Products to be tested/inspected.
 - c. To facilitate tests/inspections.
 - d. To provide storage and curing of test samples.
 - 4. Notify Architect and laboratory 24 hours prior to expected time for operations requiring testing/inspection services.
 - 5. Employ services of an independent qualified testing laboratory and pay for additional samples, tests, and inspections required by CMGC Contractor beyond specified requirements.
 - 6. Arrange with Owner's agency and pay for additional samples, tests, and inspections required by CMGC Contractor beyond specified requirements.
- D. Re-testing required because of non-compliance with specified requirements shall be performed by the same agency on instructions by Architect.
- E. Re-testing required because of non-compliance with specified requirements shall be paid for by CMGC Contractor .

3.05 MANUFACTURERS' FIELD SERVICES

- A. When specified in individual specification sections, require material or product suppliers or manufacturers to provide qualified staff personnel to observe site conditions, conditions of surfaces and installation, quality of workmanship, start-up of equipment, test, adjust, and balance equipment as applicable, and to initiate instructions when necessary.
- B. Report observations and site decisions or instructions given to applicators or installers that are supplemental or contrary to manufacturers' written instructions.

3.06 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not complying with specified requirements.
- B. If, in the opinion of Owner, it is not practical to remove and replace the work, Owner will direct an appropriate remedy or adjust payment.

END OF SECTION

**SECTION 01 4216
DEFINITIONS**

PART 1 GENERAL

1.01 SUMMARY

- A. This section supplements the definitions contained in the General Conditions.
- B. Other definitions are included in individual specification sections.

1.02 DEFINITIONS

- A. Furnish: To supply, deliver, unload, and inspect for damage.
- B. Install: To unpack, assemble, erect, apply, place, finish, cure, protect, clean, start up, and make ready for use.
- C. Product: Material, machinery, components, equipment, fixtures, and systems forming the work result. Not materials or equipment used for preparation, fabrication, conveying, or erection and not incorporated into the work result. Products may be new, never before used, or re-used materials or equipment.
- D. Project Manual: The book-sized volume that includes the procurement requirements (if any), the contracting requirements, and the specifications.
- E. Provide: To furnish and install.
- F. Supply: Same as Furnish.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

This page intentionally left blank

**SECTION 01 4219
REFERENCE STANDARDS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Requirements relating to referenced standards.
- B. Reference standards full title and edition date.

1.02 QUALITY ASSURANCE

- A. For products or workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Should specified reference standards conflict with Contract Documents, request clarification from the Architect before proceeding.
- C. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of the Architect shall be altered by Contract Documents by mention or inference otherwise in any reference document.

PART 2 CONSTRUCTION INDUSTRY ORGANIZATION DOCUMENTS

2.01 ASTM A SERIES -- ASTM INTERNATIONAL

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.

2.02 ASTM D SERIES -- ASTM INTERNATIONAL

- A. ASTM D1227 - Standard Specification for Emulsified Asphalt Used as a Protective Coating for Roofing; 2013.
- B. ASTM D3322 - Standard Practice for Testing Primers and Primer Surfacer Over Preformed Metal; 2023.
- C. ASTM D3575 - Standard Test Methods for Flexible Cellular Materials Made from Olefin Polymers; 2020.
- D. ASTM D4956 - Standard Specification for Retroreflective Sheeting for Traffic Control; 2019.
- E. ASTM D6531 - Standard Test Method for Relative Tinting Strength of Aqueous Ink Systems by Instrumental Measurement; 2024.

2.03 ASTM E SERIES -- ASTM INTERNATIONAL

- A. ASTM E814 - Standard Test Method for Fire Tests of Penetration Firestop Systems; 2024.

2.04 ASTM G SERIES -- ASTM INTERNATIONAL

2.05 AWC -- AMERICAN WOOD COUNCIL

2.06 CRSI -- CONCRETE REINFORCING STEEL INSTITUTE

2.07 GA -- GYPSUM ASSOCIATION

- A. GA-201 - Using Gypsum Board for Walls & Ceilings; 1990.
- B. GA-214 - Levels of Finish for Gypsum Panel Products; 2021.

2.08 GANA -- GLASS ASSOCIATION OF NORTH AMERICA

- A. GANA (GM) - GANA Glazing Manual; 2022.
- B. GANA (SM) - GANA Sealant Manual; 2008.

2.09 ICC -- INTERNATIONAL CODE COUNCIL, INC.

- A. ICC (IBC) - International Building Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- B. ICC (IECC) - International Energy Conservation Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

- C. ICC (IFC) - International Fire Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- D. ICC (IMC) - International Mechanical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- E. ICC (IPC) - International Plumbing Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

2.10 NFRC -- NATIONAL FENESTRATION RATING COUNCIL, INC.

- A. NFRC (CPD) - Certified Product Directory - National Fenestration Rating Council; Current Edition.
- B. NFRC 100 - Procedure for Determining Fenestration Product U-factors; 2023.
- C. NFRC 200 - Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence; 2023.
- D. NFRC 400 - Procedure for Determining Fenestration Product Air Leakage; 2023.

2.11 PCI -- PRECAST/PRESTRESSED CONCRETE INSTITUTE

2.12 SMACNA -- SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION, INC.

2.13 TCNA -- TILE COUNCIL OF NORTH AMERICA, INC.

2.14 TMS -- THE MASONRY SOCIETY

- A. TMS 402/602 - Building Code Requirements and Specification for Masonry Structures; 2022, with Errata (2024).

2.15 TPI -- TURFGRASS PRODUCERS INTERNATIONAL

- A. TPI (SPEC) - Guideline Specifications to Turfgrass Sodding; 2006.

PART 3 UNITED STATES GOVERNMENT AND RELATED AGENCIES DOCUMENTS

3.01 COE -- CORPS OF ENGINEERS, U.S. ARMY

END OF SECTION

This page intentionally left blank

**SECTION 01 5000
TEMPORARY FACILITIES AND CONTROLS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary utilities.
- B. Temporary telecommunications services.
- C. Temporary sanitary facilities.
- D. Temporary Controls: Barriers, enclosures, and fencing.
- E. Security requirements.
- F. Waste removal facilities and services.
- G. Project identification sign.

1.02 TEMPORARY UTILITIES

- A. Owner will provide the following:
 - 1. Electrical power, consisting of connection to existing facilities.
 - 2. Water supply, consisting of connection to existing facilities.
- B. Provide and pay for all electrical power, lighting, and water required for construction purposes.
- C. Existing facilities with power at the scoreboard be used.
- D. Use trigger-operated nozzles for water hoses, to avoid waste of water.

1.03 TELECOMMUNICATIONS SERVICES

- A. Provide, maintain, and pay for telecommunications services to field office at time of project mobilization.

1.04 TEMPORARY SANITARY FACILITIES

- A. Provide and maintain required facilities and enclosures. Provide at time of project mobilization.
- B. Use of existing facilities located at the job site is not permitted.
- C. Maintain daily in clean and sanitary condition.

1.05 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Provide protection for plants designated to remain. Replace damaged plants.
- D. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.
- E. Traffic Controls: Provide during regular school hours and other school events.

1.06 FENCING

- A. Construction: CMGC Contractor's option.
- B. Provide 6 foot high fence around construction site; equip with vehicular and pedestrian gates with locks.

1.07 EXTERIOR ENCLOSURES

- A. Provide temporary insulated weather tight closure of exterior openings to accommodate acceptable working conditions and protection for Products, to allow for temporary heating and maintenance of required ambient temperatures identified in individual specification sections,

and to prevent entry of unauthorized persons. Provide access doors with self-closing hardware and locks.

1.08 INTERIOR ENCLOSURES

- A. Provide temporary partitions and ceilings as indicated to separate work areas from Owner-occupied areas, to prevent penetration of dust and moisture into Owner-occupied areas, and to prevent damage to existing materials and equipment.
- B. Construction: Framing and reinforced polyethylene sheet materials with closed joints and sealed edges at intersections with existing surfaces:

1.09 SECURITY

- A. Provide security and facilities to protect Work, existing facilities, and Owner's operations from unauthorized entry, vandalism, or theft.

1.10 VEHICULAR ACCESS AND PARKING

- A. Coordinate access and haul routes with governing authorities and Owner.
- B. Provide and maintain access to fire hydrants, free of obstructions.
- C. Provide means of removing mud from vehicle wheels before entering streets.
- D. Provide temporary parking areas to accommodate construction personnel. When site space is not adequate, provide additional off-site parking.

1.11 WASTE REMOVAL

- A. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- B. Provide containers with lids. Remove trash from site periodically.
- C. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- D. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.12 PROJECT IDENTIFICATION

- A. Provide project identification sign of design and construction indicated on drawings.
- B. Erect on site at location indicated.
- C. No other signs are allowed without Owner permission except those required by law.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

**SECTION 01 5213
FIELD OFFICES AND SHEDS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary field offices for use of CMGC Contractor .

1.02 RELATED REQUIREMENTS

1.03 USE OF EXISTING FACILITIES

1.04 USE OF PERMANENT FACILITIES

- A. When permanent facilities are enclosed with operable utilities, relocate offices into building, with written agreement of Owner, and remove temporary buildings.

PART 2 PRODUCTS

2.01 CONSTRUCTION

- A. Portable or mobile buildings, or buildings constructed with floors raised above ground, securely fixed to foundations, with steps and landings at entrance doors.
- B. Construction: Structurally sound, secure, weather tight enclosures for office. Maintain during progress of Work; remove when no longer needed.
- C. Fire Extinguishers: Appropriate type fire extinguisher at each office.

2.02 ENVIRONMENTAL CONTROL

- A. Heating, Cooling, and Ventilating: Automatic equipment to maintain comfort conditions.

2.03 CMGC CONTRACTOR OFFICE AND FACILITIES

- A. Size: For CMGC Contractor 's needs and to provide space for project meetings.
- B. Other Furnishings: CMGC Contractor 's option.
- C. Equipment: Six adjustable band protective helmets for visitors, one 10 inch outdoor weather thermometer .

PART 3 EXECUTION

3.01 PREPARATION

- A. Fill and grade sites for temporary structures to provide drainage away from buildings.

3.02 INSTALLATION

- A. Install office spaces ready for occupancy 15 days after date fixed in Notice to Proceed.

3.03 MAINTENANCE AND CLEANING

- A. Maintain approach walks free of mud, water, and snow.

3.04 REMOVAL

- A. At completion of Work remove buildings, foundations, utility services, and debris. Restore areas.

END OF SECTION

This page intentionally left blank

**SECTION 01 6000
PRODUCT REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General product requirements.
- B. Re-use of existing products.
- C. Transportation, handling, storage and protection.
- D. Product option requirements.
- E. Substitution limitations.
- F. Procedures for Owner-supplied products.
- G. Maintenance materials, including extra materials, spare parts, tools, and software.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Lists of products to be removed from existing building.
- B. Section 01 2500 - Substitution Procedures: Substitutions made during procurement and/or construction phases.
- C. Section 01 4000 - Quality Requirements: Product quality monitoring.
- D. Section 01 6116 - Volatile Organic Compound (VOC) Content Restrictions: Requirements for VOC-restricted product categories.
- E. Section 01 7419 - Construction Waste Management and Disposal: Waste disposal requirements potentially affecting product selection, packaging and substitutions.

1.03 SUBMITTALS

- A. Proposed Products List: Submit list of major products proposed for use, with name of manufacturer, trade name, and model number of each product.
 - 1. Submit within 15 days after date of Notice to Proceed.
 - 2. For products specified only by reference standards, list applicable reference standards.
- B. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- C. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- D. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
 - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

PART 2 PRODUCTS

2.01 EXISTING PRODUCTS

- A. Do not use materials and equipment removed from existing premises unless specifically required or permitted by Contract Documents.
- B. Unforeseen historic items encountered remain the property of the Owner; notify Owner promptly upon discovery; protect, remove, handle, and store as directed by Owner.
- C. Existing materials and equipment indicated to be removed, but not to be re-used, relocated, reinstalled, delivered to the Owner, or otherwise indicated as to remain the property of the Owner, become the property of the CMGC Contractor ; remove from site.

2.02 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by Contract Documents.
- B. Use of products having any of the following characteristics is not permitted:
 - 1. Containing lead, cadmium, or asbestos.
- C. Where other criteria are met, CMGC Contractor shall give preference to products that:
 - 1. If used on interior, have lower emissions, as defined in Section 01 6116.
 - 2. If wet-applied, have lower VOC content, as defined in Section 01 6116.
 - 3. Are extracted, harvested, and/or manufactured closer to the location of the project.
 - 4. Have longer documented life span under normal use.
 - 5. Result in less construction waste. See Section 01 7419

2.03 PRODUCT OPTIONS

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, substitutions allowed as per each individual section upon approval during bidding process. Contractors may bid on approved manufacturer's products or substitutions approved during bidding; those that are approved in an addendum.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

2.04 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver and place in location as directed; obtain receipt prior to final payment.

PART 3 EXECUTION

3.01 SUBSTITUTION LIMITATIONS

- A. See Section 01 2500 - Substitution Procedures.

3.02 OWNER-SUPPLIED PRODUCTS

- A. Owner's Responsibilities:
 - 1. Arrange for and deliver Owner reviewed shop drawings, product data, and samples, to CMGC Contractor .
 - 2. Arrange and pay for product delivery to site.
 - 3. On delivery, inspect products jointly with CMGC Contractor .
 - 4. Submit claims for transportation damage and replace damaged, defective, or deficient items.
 - 5. Arrange for manufacturers' warranties, inspections, and service.
- B. CMGC Contractor 's Responsibilities:
 - 1. Review Owner reviewed shop drawings, product data, and samples.
 - 2. Receive and unload products at site; inspect for completeness or damage jointly with Owner.
 - 3. Handle, store, install and finish products.
 - 4. Repair or replace items damaged after receipt.

3.03 TRANSPORTATION AND HANDLING

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.

- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

3.04 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication. See Section 01 7419.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weathertight, climate-controlled enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- G. Comply with manufacturer's warranty conditions, if any.
- H. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- I. Prevent contact with material that may cause corrosion, discoloration, or staining.
- J. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- K. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

END OF SECTION

This page intentionally left blank

**SECTION 01 6116
VOLATILE ORGANIC COMPOUND (VOC) CONTENT RESTRICTIONS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Requirements for Indoor-Emissions-Restricted products.
- B. Requirements for VOC-Content-Restricted products.

1.02 RELATED REQUIREMENTS

- A. Section 01 3000 - Administrative Requirements: Submittal procedures.
- B. Section 01 6000 - Product Requirements: Fundamental product requirements, substitutions and product options, delivery, storage, and handling.

1.03 DEFINITIONS

- A. Indoor-Emissions-Restricted Products: All products in the following product categories, whether specified or not:
 - 1. Interior paints and coatings applied on site.
 - 2. Interior adhesives and sealants applied on site, including flooring adhesives.
 - 3. Flooring.
 - 4. Composite wood.
 - 5. Products making up wall and ceiling assemblies.
 - 6. Thermal and acoustical insulation.
- B. Interior of Building: Anywhere inside the exterior weather barrier.
- C. Adhesives: All gunnable, trowelable, liquid-applied, and aerosol adhesives, whether specified or not; including flooring adhesives, resilient base adhesives, and pipe jointing adhesives.
- D. Sealants: All gunnable, trowelable, and liquid-applied joint sealants and sealant primers, whether specified or not; including firestopping sealants and duct joint sealers.
- E. Inherently Non-Emitting Materials: Products composed wholly of minerals or metals, unless they include organic-based surface coatings, binders, or sealants; and specifically the following:
 - 1. Concrete.
 - 2. Clay brick.
 - 3. Metals that are plated, anodized, or powder-coated.
 - 4. Glass.
 - 5. Ceramics.
 - 6. Solid wood flooring that is unfinished and untreated.

1.04 REFERENCE STANDARDS

1.05 UTAH ADMINISTRATIVE CODE - R307 ENVIROMENTAL QUALITY, AIR QUALITY; RULE R307-357. CONSUMER PRODUCTS.

1.06 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: For each VOC-restricted product used in the project, submit evidence of compliance.

PART 2 PRODUCTS

2.01 MATERIALS

- A. All Products: Comply with the most stringent of federal, State, and local requirements, or these specifications.

PART 3 EXECUTION

3.01 FIELD QUALITY CONTROL

- A. Owner reserves the right to reject non-compliant products, whether installed or not, and require their removal and replacement with compliant products at no extra cost to Owner.
- B. Additional costs to restore indoor air quality due to installation of non-compliant products will be borne by CMGC Contractor .

END OF SECTION

**SECTION 01 7000
EXECUTION AND CLOSEOUT REQUIREMENTS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition, None - N/A.
- C. Pre-installation meetings.
- D. Cutting and patching.
- E. Surveying for laying out the work.
- F. Cleaning and protection.
- G. Starting of systems and equipment.
- H. Demonstration and instruction of Owner personnel.
- I. Closeout procedures, including CMGC Contractor 's Correction Punch List, except payment procedures.
- J. General requirements for maintenance service.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 01 5000 - Temporary Facilities and Controls: Temporary exterior enclosures.
- C. Section 01 5000 - Temporary Facilities and Controls: Temporary interior partitions.
- D. Section 01 7800 - Closeout Submittals: Project record documents, operation and maintenance data, warranties, and bonds.
- E. Section 02 4100 - Demolition: Demolition of whole structures and parts thereof; site utility demolition.
- F. Section 07 8400 - Firestopping.
- G. Individual Product Specification Sections:
 - 1. Advance notification to other sections of openings required in work of those sections.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2027.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Survey work: Submit name, address, and telephone number of Surveyor before starting survey work.
 - 1. On request, submit documentation verifying accuracy of survey work.
 - 2. Submit a copy of site drawing signed by the Land Surveyor, that the elevations and locations of the work are in compliance with Contract Documents.
 - 3. Submit surveys and survey logs for the project record.
- C. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
 - 1. Structural integrity of any element of Project.
 - 2. Integrity of weather exposed or moisture resistant element.
 - 3. Efficiency, maintenance, or safety of any operational element.
 - 4. Visual qualities of sight exposed elements.
 - 5. Work of Owner or separate Contractor.

- D. Project Record Documents: Accurately record actual locations of capped and active utilities.

1.05 QUALIFICATIONS

- A. For surveying work, employ a land surveyor registered in Utah and acceptable to Architect. Submit evidence of surveyor's Errors and Omissions insurance coverage in the form of an Insurance Certificate. Employ only individual(s) trained and experienced in collecting and recording accurate data relevant to ongoing construction activities,

1.06 PROJECT CONDITIONS

- A. Use of explosives is not permitted.
- B. Grade site to drain. Maintain excavations free of water. Provide, operate, and maintain pumping equipment.
- C. Protect site from puddling or running water. Provide water barriers as required to protect site from soil erosion.
- D. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- E. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
 - 1. Provide dust-proof enclosures to prevent entry of dust generated outdoors.
 - 2. Provide dust-proof barriers between construction areas and areas continuing to be occupied by Owner.
- F. Erosion and Sediment Control: Plan and execute work by methods to control surface drainage from cuts and fills, from borrow and waste disposal areas. Prevent erosion and sedimentation.
- G. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
 - 1. Outdoors: Limit conduct of especially noisy exterior work to the hours of 8 am to 5 pm.
 - 2. Indoors: Limit conduct of especially noisy interior work to the hours of 6 pm to 7 am.
- H. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.

1.07 COORDINATION

- A. See Section 01 1000 for occupancy-related requirements.
- B. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- C. Notify affected utility companies and comply with their requirements.
- D. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- E. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on drawings. Follow routing indicated for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- F. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- G. Coordinate completion and clean-up of work of separate sections.
- H. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

PART 2 PRODUCTS

2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 6000 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

3.03 PREINSTALLATION MEETINGS

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect four days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
 - 1. Review conditions of examination, preparation and installation procedures.
 - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect, Owner, participants, and those affected by decisions made.

3.04 LAYING OUT THE WORK

- A. Verify locations of survey control points prior to starting work.
- B. Promptly notify Architect of any discrepancies discovered.
- C. CMGC Contractor shall locate and protect survey control and reference points.
- D. Protect survey control points prior to starting site work; preserve permanent reference points during construction.

- E. Promptly report to Architect the loss or destruction of any reference point or relocation required because of changes in grades or other reasons.
- F. Replace dislocated survey control points based on original survey control. Make no changes without prior written notice to Architect.
- G. Utilize recognized engineering survey practices.
- H. Establish elevations, lines and levels. Locate and lay out by instrumentation and similar appropriate means:
 - 1. Grid or axis for structures.
 - 2. Building foundation, column locations, ground floor elevations.
- I. Periodically verify layouts by same means.
- J. Maintain a complete and accurate log of control and survey work as it progresses.

3.05 GENERAL INSTALLATION REQUIREMENTS

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

3.06 ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as indicated.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Keep areas in which alterations are being conducted separated from other areas that are still occupied.
 - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 01 5000 in locations indicated on drawings.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
 - 1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction specified.
 - 2. Remove items indicated on drawings.
 - 3. Relocate items indicated on drawings.
 - 4. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
 - 5. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove, relocate, and extend existing systems to accommodate new construction.

1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
 2. Where existing systems or equipment are not active and Contract Documents require reactivation, put back into operational condition; repair supply, distribution, and equipment as required.
 3. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - a. Disable existing systems only to make switchovers and connections; minimize duration of outages.
 - b. Provide temporary connections as required to maintain existing systems in service.
 4. Verify that abandoned services serve only abandoned facilities.
 5. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- F. Protect existing work to remain.
1. Prevent movement of structure; provide shoring and bracing if necessary.
 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 3. Repair adjacent construction and finishes damaged during removal work.
- G. Adapt existing work to fit new work: Make as neat and smooth transition as possible.
1. When existing finished surfaces are cut so that a smooth transition with new work is not possible, terminate existing surface along a straight line at a natural line of division and make recommendation to Architect.
 2. Where removal of partitions or walls results in adjacent spaces becoming one, rework floors, walls, and ceilings to a smooth plane without breaks, steps, or bulkheads.
 3. Where a change of plane of 1/4 inch or more occurs in existing work, submit recommendation for providing a smooth transition for Architect review and request instructions.
 4. Trim existing wood doors as necessary to clear new floor finish. Refinish trim as required.
- H. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- I. Refinish existing surfaces as indicated:
1. Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes.
 2. If mechanical or electrical work is exposed accidentally during the work, re-cover and refinish to match.
- J. Clean existing systems and equipment.
- K. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- L. Do not begin new construction in alterations areas before demolition is complete.
- M. Comply with all other applicable requirements of this section.

3.07 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.
- C. Perform whatever cutting and patching is necessary to:
 1. Complete the work.

2. Fit products together to integrate with other work.
 3. Provide openings for penetration of mechanical, electrical, and other services.
 4. Match work that has been cut to adjacent work.
 5. Repair areas adjacent to cuts to required condition.
 6. Repair new work damaged by subsequent work.
 7. Remove samples of installed work for testing when requested.
 8. Remove and replace defective and non-complying work.
- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Employ skilled and experienced installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- F. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- G. Restore work with new products in accordance with requirements of Contract Documents.
- H. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- I. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material in accordance with Section 07 8400, to full thickness of the penetrated element.
- J. Patching:
1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
 2. Match color, texture, and appearance.
 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

3.08 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from pipe chases, plenums, attics, crawl spaces, and other closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

3.09 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- F. Protect work from spilled liquids. If work is exposed to spilled liquids, immediately remove protective coverings, dry out work, and replace protective coverings.

- G. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- H. Remove protective coverings when no longer needed; reuse or recycle coverings if possible.

3.10 SYSTEM STARTUP

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Notify Architect and Owner seven days prior to start-up of each item.
- C. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.
- D. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- E. Verify that wiring and support components for equipment are complete and tested.
- F. Execute start-up under supervision of applicable CMGC Contractor personnel and manufacturer's representative in accordance with manufacturers' instructions.
- G. Submit a written report that equipment or system has been properly installed and is functioning correctly.

3.11 DEMONSTRATION AND INSTRUCTION

- A. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shutdown of each item of equipment at scheduled time, at equipment location.
- B. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- C. Provide a qualified person who is knowledgeable about the Project to perform demonstration and instruction of Owner's personnel.
- D. Utilize operation and maintenance manuals as basis for instruction. Review contents of manual with Owner's personnel in detail to explain all aspects of operation and maintenance.
- E. Prepare and insert additional data in operations and maintenance manuals when need for additional data becomes apparent during instruction.

3.12 ADJUSTING

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

3.13 FINAL CLEANING

- A. Use cleaning materials that are nonhazardous.
- B. Clean interior and exterior glass, surfaces exposed to view; remove temporary labels, stains and foreign substances, polish transparent and glossy surfaces, vacuum carpeted and soft surfaces.
- C. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- D. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- E. Replace filters of operating equipment.
- F. Clean debris from roofs, gutters, downspouts, scuppers, overflow drains, area drains, and drainage systems.
- G. Clean site; sweep paved areas, rake clean landscaped surfaces.
- H. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

3.14 CLOSEOUT PROCEDURES

- A. Make submittals that are required by governing or other authorities.
- B. Accompany Project Coordinator on preliminary observation to determine items to be listed for completion or correction in the CMGC Contractor 's Correction Punch List for CMGC Contractor 's Notice of Substantial Completion.
- C. Notify Architect when work is considered ready for Architect's Substantial Completion observation.
- D. Conduct Substantial Completion observation and create Final Correction Punch List containing Architect's and CMGC Contractor 's comprehensive list of items identified to be completed or corrected and submit to Architect.
- E. Correct items of work listed in Final Correction Punch List and comply with requirements for access to Owner-occupied areas.
- F. Notify Architect when work is considered finally complete and ready for Architect's Substantial Completion final observation.
- G. Complete items of work determined by Architect listed in executed Certificate of Substantial Completion.

3.15 MAINTENANCE

- A. Provide service and maintenance of components indicated in specification sections.
- B. Maintenance Period: As indicated in specification sections or, if not indicated, not less than one year from the Date of Substantial Completion or the length of the specified warranty, whichever is longer.
- C. Examine system components at a frequency consistent with reliable operation. Clean, adjust, and lubricate as required.
- D. Include systematic examination, adjustment, and lubrication of components. Repair or replace parts whenever required. Use parts produced by the manufacturer of the original component.
- E. Maintenance service shall not be assigned or transferred to any agent or subcontractor without prior written consent of the Owner.

END OF SECTION

**SECTION 01 7419
CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL**

PART 1 GENERAL

1.01 WASTE MANAGEMENT REQUIREMENTS

- A. Owner requires that this project generate the least amount of trash and waste possible.
- B. Employ processes that ensure the generation of as little waste as possible due to error, poor planning, breakage, mishandling, contamination, or other factors.
- C. Minimize trash/waste disposal in landfills; reuse, salvage, or recycle as much waste as economically feasible.
- D. CMGC Contractor Reporting Responsibilities: Submit periodic Waste Disposal Reports; report landfill disposal, incineration, recycling, salvage, and reuse regardless of to whom the cost or savings accrues; use the same units of measure on required reports.
- E. Methods of trash/waste disposal that are not acceptable are:
 - 1. Burning on the project site.
 - 2. Burying on the project site.
 - 3. Dumping or burying on other property, public or private.
 - 4. Other illegal dumping or burying.
- F. Regulatory Requirements: CMGC Contractor is responsible for knowing and complying with regulatory requirements, including but not limited to Federal, state and local requirements, pertaining to legal disposal of all construction and demolition waste materials.

1.02 RELATED REQUIREMENTS

- A. Section 01 3000 - Administrative Requirements: Additional requirements for project meetings, reports, submittal procedures, and project documentation.
- B. Section 01 5000 - Temporary Facilities and Controls: Additional requirements related to trash/waste collection and removal facilities and services.
- C. Section 01 6000 - Product Requirements: Waste prevention requirements related to delivery, storage, and handling.
- D. Section 01 7000 - Execution and Closeout Requirements: Trash/waste prevention procedures related to demolition, cutting and patching, installation, protection, and cleaning.

1.03 DEFINITIONS

- A. Clean: Untreated and unpainted; not contaminated with oils, solvents, caulk, or the like.
- B. Construction and Demolition Waste: Solid wastes typically including building materials, packaging, trash, debris, and rubble resulting from construction, remodeling, repair and demolition operations.
- C. Hazardous: Exhibiting the characteristics of hazardous substances, i.e., ignitibility, corrosivity, toxicity or reactivity.
- D. Nonhazardous: Exhibiting none of the characteristics of hazardous substances, i.e., ignitibility, corrosivity, toxicity, or reactivity.
- E. Nontoxic: Neither immediately poisonous to humans nor poisonous after a long period of exposure.
- F. Recyclable: The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product for reuse by others.
- G. Recycle: To remove a waste material from the project site to another site for remanufacture into a new product for reuse by others.
- H. Recycling: The process of sorting, cleansing, treating and reconstituting solid waste and other discarded materials for the purpose of using the altered form. Recycling does not include burning, incinerating, or thermally destroying waste.

- I. Return: To give back reusable items or unused products to vendors for credit.
- J. Reuse: To reuse a construction waste material in some manner on the project site.
- K. Salvage: To remove a waste material from the project site to another site for resale or reuse by others.
- L. Sediment: Soil and other debris that has been eroded and transported by storm or well production run-off water.
- M. Source Separation: The act of keeping different types of waste materials separate beginning from the first time they become waste.
- N. Toxic: Poisonous to humans either immediately or after a long period of exposure.
- O. Trash: Any product or material unable to be reused, returned, recycled, or salvaged.
- P. Waste: Extra material or material that has reached the end of its useful life in its intended use. Waste includes salvageable, returnable, recyclable, and reusable material.

PART 2 PRODUCTS

2.01 N/A

PART 3 EXECUTION

3.01 WASTE MANAGEMENT PROCEDURES

- A. See Section 01 3000 for additional requirements for project meetings, reports, submittal procedures, and project documentation.
- B. See Section 01 5000 for additional requirements related to trash/waste collection and removal facilities and services.
- C. See Section 01 6000 for waste prevention requirements related to delivery, storage, and handling.
- D. See Section 01 7000 for trash/waste prevention procedures related to demolition, cutting and patching, installation, protection, and cleaning.

3.02 WASTE MANAGEMENT PLAN IMPLEMENTATION

- A. Manager: Designate an on-site person or persons responsible for instructing workers and overseeing and documenting results of the Waste Management Plan.
- B. Communication: Distribute copies of the Waste Management Plan to job site foreman, each subcontractor, Owner, and Architect.
- C. Instruction: Provide on-site instruction of appropriate separation, handling, and recycling, salvage, reuse, and return methods to be used by all parties at the appropriate stages of the project.
- D. Meetings: Discuss trash/waste management goals and issues at project meetings.
 - 1. Prebid meeting.
 - 2. Preconstruction meeting.
 - 3. Regular job-site meetings.
- E. Facilities: Provide specific facilities for separation and storage of materials for recycling, salvage, reuse, return, and trash disposal, for use by all contractors and installers.
 - 1. Provide containers as required.
 - 2. Provide adequate space for pick-up and delivery and convenience to subcontractors.
 - 3. Keep recycling and trash/waste bin areas neat and clean and clearly marked in order to avoid contamination of materials.
- F. Hazardous Wastes: Separate, store, and dispose of hazardous wastes according to applicable regulations.
- G. Recycling: Separate, store, protect, and handle at the site identified recyclable waste products in order to prevent contamination of materials and to maximize recyclability of identified

materials. Arrange for timely pickups from the site or deliveries to recycling facility in order to prevent contamination of recyclable materials.

- H. Reuse of Materials On-Site: Set aside, sort, and protect separated products in preparation for reuse.
- I. Salvage: Set aside, sort, and protect products to be salvaged for reuse off-site.

END OF SECTION

This page intentionally left blank

**SECTION 01 7800
CLOSEOUT SUBMITTALS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project record documents.
- B. Operation and maintenance data.
- C. Warranties and bonds.

1.02 RELATED REQUIREMENTS

- A. Section 00 4000 05.1 Sub Bonds: Performance bond and labor and material payment bonds, warranty, and correction of work.
- B. Section 01 3000 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- C. Section 01 7000 - Execution and Closeout Requirements: Contract closeout procedures.
- D. Individual Product Sections: Specific requirements for operation and maintenance data.
- E. Individual Product Sections: Warranties required for specific products or Work.

1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to Architect with claim for final Application for Payment.
- B. Operation and Maintenance Data:
 - 1. Submit an electronic copy of preliminary draft or proposed formats and outlines of contents before start of Work. Architect will review draft and return one copy with comments.
 - 2. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within ten days after acceptance.
 - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with Architect comments. Revise content of all document sets as required prior to final submission.
 - 4. Submit 1 electronic copy and 3 hard sets of revised final documents in final form within 10 days after final inspection.
- C. Warranties and Bonds:
 - 1. For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within 10 days after acceptance.
 - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
 - 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.
 - 2. Addenda.
 - 3. Change Orders and other modifications to the Contract.
 - 4. Reviewed shop drawings, product data, and samples.
 - 5. Manufacturer's instruction for assembly, installation, and adjusting.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.

- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:
 - 1. Field changes of dimension and detail.
 - 2. Details not on original Contract drawings.

3.02 OPERATION AND MAINTENANCE DATA

- A. Source Data: For each product or system, list names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

3.03 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- C. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.

3.04 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS

- A. For Each Item of Equipment and Each System:
 - 1. Description of unit or system, and component parts.
 - 2. Identify function, normal operating characteristics, and limiting conditions.
 - 3. Include performance curves, with engineering data and tests.
 - 4. Complete nomenclature and model number of replaceable parts.
- B. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.
- C. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- D. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and trouble shooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- E. Provide servicing and lubrication schedule, and list of lubricants required.
- F. Include manufacturer's printed operation and maintenance instructions.
- G. Include sequence of operation by controls manufacturer.
- H. Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- I. Additional Requirements: As specified in individual product specification sections.

3.05 ASSEMBLY OF OPERATION AND MAINTENANCE MANUALS

- A. Assemble operation and maintenance data into durable manuals for Owner's personnel use, with data arranged in the same sequence as, and identified by, the specification sections.
- B. Where systems involve more than one specification section, provide separate tabbed divider for each system.
- C. Binders: Commercial quality, 8-1/2 by 11 inch three D side ring binders with durable plastic covers; 2 inch maximum ring size. When multiple binders are used, correlate data into related consistent groupings.
- D. Cover: Identify each binder with typed or printed title OPERATION AND MAINTENANCE INSTRUCTIONS; identify title of Project; identify subject matter of contents.
- E. Project Directory: Title and address of Project; names, addresses, and telephone numbers of Architect, Consultants, CMGC Contractor and subcontractors, with names of responsible parties.
- F. Tables of Contents: List every item separated by a divider, using the same identification as on the divider tab; where multiple volumes are required, include all volumes Tables of Contents in each volume, with the current volume clearly identified.
- G. Dividers: Provide tabbed dividers for each separate product and system; identify the contents on the divider tab; immediately following the divider tab include a description of product and major component parts of equipment.
- H. Text: Manufacturer's printed data, or typewritten data on 20 pound paper.
- I. Drawings: Provide with reinforced punched binder tab. Bind in with text; fold larger drawings to size of text pages.

3.06 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Owner to determine the method of submittal delivery; manual in a commercial quality binder, submitted digitally or a combination of both.
- F. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.

END OF SECTION

This page intentionally left blank

**SECTION 01 9113
GENERAL COMMISSIONING REQUIREMENTS**

PART 1 GENERAL

1.01 SUMMARY

- A. Commissioning is intended to achieve the following specific objectives; this section specifies the CMGC Contractor 's responsibilities for commissioning:
 - 1. Verify that the work is installed in accordance with Contract Documents and the manufacturer's recommendations and instructions, and that it receives adequate operational checkout prior to startup: Startup reports and Prefunctional Checklists executed by CMGC Contractor are utilized to achieve this.
 - 2. Verify and document that functional performance is in accordance with Contract Documents: Functional Tests executed by CMGC Contractor and witnessed by the Commissioning Provider are utilized to achieve this.
 - 3. Verify that operation and maintenance manuals submitted to Owner are complete: Detailed operation and maintenance (O&M) data submittals by CMGC Contractor are utilized to achieve this.
 - 4. Verify that the Owner's operating personnel are adequately trained: Formal training conducted by CMGC Contractor is utilized to achieve this.
- B. The Commissioning Provider directs and coordinates all commissioning activities; this section describes some but not all of the Commissioning Provider's responsibilities.

1.02 SCOPE OF COMMISSIONING

- A. The following are to be commissioned:
- B. Building envelope:
 - 1. Air tightness.
- C. Plumbing Systems:
 - 1. See plumbing specifications
- D. HVAC System:
 - 1. See mechanical specifications
- E. Electrical Systems:
 - 1. See electrical specifications
- F. Electronic Safety and Security:
 - 1. Security system, including doors and hardware.
 - 2. Fire and smoke alarms.
- G. Other equipment and systems explicitly identified elsewhere in Contract Documents as requiring commissioning.

1.03 RELATED REQUIREMENTS

- A. Section 01 7800 - Closeout Submittals: Scope and procedures for operation and maintenance manuals and project record documents.

PART 2 PRODUCTS

2.01 TEST EQUIPMENT

- A. Provide all standard testing equipment required to perform startup and initial checkout and required Functional Testing; unless otherwise noted such testing equipment will NOT become the property of Owner.
- B. Calibration Tolerances: Provide testing equipment of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified. If not otherwise noted, the following minimum requirements apply:
 - 1. Temperature Sensors and Digital Thermometers: Certified calibration within past year to accuracy of 0.5 degree F and resolution of plus/minus 0.1 degree F.

2. Pressure Sensors: Accuracy of plus/minus 2.0 percent of the value range being measured (not full range of meter), calibrated within the last year.
 3. Calibration: According to the manufacturer's recommended intervals and when dropped or damaged; affix calibration tags or keep certificates readily available for inspection.
- C. Equipment-Specific Tools: Where special testing equipment, tools and instruments are specific to a piece of equipment, are only available from the vendor, and are required in order to accomplish startup or Functional Testing, provide such equipment, tools, and instruments as part of the work at no extra cost to Owner; such equipment, tools, and instruments are to become the property of Owner.
- D. Dataloggers: Independent equipment and software for monitoring flows, currents, status, pressures, etc. of equipment.
1. Dataloggers required for Functional Tests will be provided by the Commissioning Provider and will not become the property of Owner.

PART 3 EXECUTION

3.01 COMMISSIONING PLAN

- A. Commissioning Provider has prepared the Commissioning Plan.
1. Require attendance and participation of relevant subcontractors, installers, suppliers, and manufacturer representatives.
- B. CMGC Contractor is responsible for compliance with the Commissioning Plan.
- C. Commissioning Plan: The commissioning schedule, procedures, and coordination requirements for all parties in the commissioning process.
- D. Commissioning Schedule:
1. Submit anticipated dates of startup of each item of equipment and system to Commissioning Provider within 60 days after award of contract.
 2. Re-submit anticipated startup dates monthly, but not less than 4 weeks prior to startup.
 3. Prefunctional Checklists and Functional Tests are to be performed in sequence from components, to subsystems, to systems.
 4. Provide sufficient notice to Commissioning Provider for delivery of relevant Checklists and Functional Test procedures to avoid delay.

3.02 STARTUP PLANS AND REPORTS

- A. Startup Plans: For each item of equipment and system for which the manufacturer provides a startup plan, submit the plan not less than 8 weeks prior to startup.
- B. Startup Reports: For each item of equipment and system for which the manufacturer provides a startup checklist (or startup plan or field checkout sheet), document compliance by submitting the completed startup checklist prior to startup, signed and dated by responsible entity.
- C. Submit directly to the Commissioning Provider.

3.03 PREFUNCTIONAL CHECKLISTS

- A. A Prefunctional Checklist is required to be filled out for each item of equipment or other assembly specified to be commissioned.
1. No sampling of identical or near-identical items is allowed.
 2. These checklists do not replace manufacturers' recommended startup checklists, regardless of apparent redundancy.
 3. Prefunctional Checklist forms will not be complete until after award of the contract; the following types of information will be gathered via the completed Checklist forms:
 - a. Certification by installing contractor that the unit is properly installed, started up, and operating and ready for Functional Testing.
 - b. Confirmation of receipt of each shop drawing and commissioning submittal specified, itemized by unit.

- c. Manufacturer, model number, and relevant capacity information; list information "as specified," "as submitted," and "as installed."
 - d. Serial number of installed unit.
 - e. List of inspections to be conducted to document proper installation prior to startup and Functional Testing; these will be primarily static inspections and procedures; for equipment and systems may include normal manufacturer's start-up checklist items and minor testing.
 - f. Sensor and actuator calibration information.
- B. CMGC Contractor is responsible for filling out Prefunctional Checklists, after completion of installation and before startup; witnessing by the Commissioning Provider is not required unless otherwise specified.
 - 1. Each line item without deficiency is to be witnessed, initialed, and dated by the actual witness; checklists are not complete until all line items are initialed and dated complete without deficiencies.
 - 2. Checklists with incomplete items may be submitted for approval provided the CMGC Contractor attests that incomplete items do not preclude the performance of safe and reliable Functional Testing; re-submission of the Checklist is required upon completion of remaining items.
 - 3. Individual Checklists may contain line items that are the responsibility of more than one installer; CMGC Contractor shall assign responsibility to appropriate installers or subcontractors, with identification recorded on the form.
 - 4. If any Checklist line item is not relevant, record reasons on the form.
 - 5. CMGC Contractor may independently perform startup inspections and/or tests, at CMGC Contractor's option.
 - 6. Regardless of these reporting requirements, CMGC Contractor is responsible for correct startup and operation.
 - 7. Submit completed Checklists to Commissioning Provider within 2 days of completion.
- C. Commissioning Provider is responsible for furnishing the Prefunctional Checklists to CMGC Contractor.
 - 1. Initial Drafts: CMGC Contractor is responsible for initial draft of Prefunctional Checklist where so indicated in Contract Documents.
 - 2. Provide all additional information requested by Commissioning Provider to aid in preparation of checklists, such as shop drawing submittals, manufacturers' startup checklists, and O&M data.
 - 3. Commissioning Provider may add any relevant items deemed necessary regardless of whether they are explicitly mentioned in Contract Documents or not.
 - 4. When asked to review the proposed Checklists, do so in a timely manner.
- D. Commissioning Provider Witnessing: Required for:
 - 1. Each piece of primary equipment, unless sampling of multiple similar units is allowed by the commissioning plan.
 - 2. A sampling of non-primary equipment, as allowed by the commissioning plan.
- E. Deficiencies: Correct deficiencies and re-inspect or re-test, as applicable, at no extra cost to Owner.
 - 1. If difficulty in correction would delay progress, report deficiency to the Commissioning Provider immediately.

3.04 FUNCTIONAL TESTS

- A. A Functional Test is required for each item of equipment, system, or other assembly specified to be commissioned, unless sampling of multiple identical or near-identical units is allowed by the final test procedures.
- B. CMGC Contractor is responsible for execution of required Functional Tests, after completion of Prefunctional Checklist and before closeout.

- C. Commissioning Provider is responsible for witnessing and reporting results of Functional Tests, including preparation and completion of forms for that purpose.
- D. CMGC Contractor is responsible for correction of deficiencies and re-testing at no extra cost to Owner; if a deficiency is not corrected and re-tested immediately, the Commissioning Provider will document the deficiency and the CMGC Contractor 's stated intentions regarding correction.
 - 1. Deficiencies are any condition in the installation or function of a component, piece of equipment or system that is not in compliance with Contract Documents or does not perform properly.
 - 2. When the deficiency has been corrected, the CMGC Contractor completes the form certifying that the item is ready to be re-tested and returns the form to the Commissioning Provider; the Commissioning Provider will reschedule the test, and the CMGC Contractor shall re-test.
 - 3. Identical or Near-Identical Items: If 10 percent, or three, whichever is greater, of identical or near-identical items fail to perform due to material or manufacturing defect, all items will be considered defective; provide a proposal for correction within 2 weeks after notification of defect, including provision for testing sample installations prior to replacement of all items.
 - 4. CMGC Contractor shall bear the cost of Owner and Commissioning Provider personnel time witnessing re-testing.
 - 5. CMGC Contractor shall bear the cost of Owner and Commissioning Provider personnel time witnessing re-testing if the test failed due to failure to execute the relevant Prefunctional Checklist correctly; if the test failed for reasons that would not have been identified in the Prefunctional Checklist process, CMGC Contractor shall bear the cost of the second and subsequent re-tests.
- E. Functional Test Procedures:
 - 1. Some test procedures are included in Contract Documents; where Functional Test procedures are not included in Contract Documents, test procedures will be determined by the Commissioning Provider with input by and coordination with CMGC Contractor .
 - 2. Examples of Functional Testing:
 - a. Test the dynamic function and operation of equipment and systems (rather than just components) using manual (direct observation) or monitoring methods under full operation (e.g., the chiller pump is tested interactively with the chiller functions to see if the pump ramps up and down to maintain the differential pressure setpoint).
 - b. Systems are tested under various modes, such as during low cooling or heating loads, high loads, component failures, unoccupied, varying outside air temperatures, fire alarm, power failure, etc.
 - c. Systems are run through all the HVAC control system's sequences of operation and components are verified to be responding as the sequence's state.
 - d. Traditional air or water test and balancing (TAB) is not Functional Testing; spot checking of TAB by demonstration to the Commissioning Provider is Functional Testing.
- F. Deferred Functional Tests: Some tests may need to be performed later, after substantial completion, due to partial occupancy, equipment, seasonal requirements, design or other site conditions; performance of these tests remains the CMGC Contractor 's responsibility regardless of timing.

3.05 SENSOR AND ACTUATOR CALIBRATION

- A. Calibrate all field-installed temperature, relative humidity, carbon monoxide, carbon dioxide, and pressure sensors and gauges, and all actuators (dampers and valves) on this piece of equipment shall be calibrated. Sensors installed in the unit at the factory with calibration certification provided need not be field calibrated.
- B. Calibrate using the methods described below; alternate methods may be used, if approved by Architect beforehand. See PART 2 for test instrument requirements. Record methods used on

the relevant Prefunctional Checklist or other suitable forms, documenting initial, intermediate, and final results.

- C. All Sensors:
 - 1. Verify that sensor location is appropriate and away from potential causes of erratic operation.
 - 2. Verify that sensors with shielded cable are grounded only at one end.
 - 3. For sensor pairs that are used to determine a temperature or pressure difference, for temperature make sure they are reading within 0.2 degree F of each other, and for pressure, within tolerance equal to 2 percent of the reading, of each other.
 - 4. Tolerances for critical applications may be tighter.
- D. Sensors Without Transmitters - Standard Application:
 - 1. Make a reading with a calibrated test instrument within 6 inches of the site sensor.
 - 2. Verify that the sensor reading, via the permanent thermostat, gauge or building automation system, is within the tolerances in the table below of the instrument-measured value.
 - 3. If not, install offset, calibrate or replace sensor.
- E. Sensors With Transmitters - Standard Application.
 - 1. Disconnect sensor.
 - 2. Connect a signal generator in place of sensor.
 - 3. Connect ammeter in series between transmitter and building automation system control panel.
 - 4. Using manufacturer's resistance-temperature data, simulate minimum desired temperature.
 - 5. Adjust transmitter potentiometer zero until 4 mA is read by the ammeter.
 - 6. Repeat for the maximum temperature matching 20 mA to the potentiometer span or maximum and verify at the building automation system.
 - 7. Record all values and recalibrate controller as necessary to comply with specified control ramps, reset schedules, proportional relationship, reset relationship and P/I reaction.
 - 8. Reconnect sensor.
 - 9. Make a reading with a calibrated test instrument within 6 inches of the site sensor.
 - 10. Verify that the sensor reading, via the permanent thermostat, gauge or building automation system, is within the tolerances in the table below of the instrument-measured value.
 - 11. If not, replace sensor and repeat.
 - 12. For pressure sensors, perform a similar process with a suitable signal generator.
- F. Sensor Tolerances for Standard Applications: Plus/minus the following maximums:
 - 1. Watthour, Voltage, Amperage: 1 percent of design.
 - 2. Pressure, Air, Water, Gas: 3 percent of design.
 - 3. Air Temperatures (Outside Air, Space Air, Duct Air): 0.4 degrees F.
 - 4. Relative Humidity: 4 percent of design.
 - 5. Barometric Pressure: 0.1 inch of Hg.
 - 6. Flow Rate, Air: 10 percent of design.
 - 7. Flow Rate, Water: 4 percent of design.
 - 8. AHU Wet Bulb and Dew Point: 2.0 degrees F.
- G. Critical Applications: For some applications more rigorous calibration techniques may be required for selected sensors. Describe any such methods used on an attached sheet.
- H. Valve/Damper Stroke Setup and Check:
 - 1. For all valve/damper actuator positions checked, verify the actual position against the control system readout.
 - 2. Set pump/fan to normal operating mode.

3. Command valve/damper closed; visually verify that valve/damper is closed and adjust output zero signal as required.
 4. Command valve/damper to open; verify position is full open and adjust output signal as required.
 5. Command valve/damper to a few intermediate positions.
 6. If actual valve/damper position does not reasonably correspond, replace actuator or add pilot positioner (for pneumatics).
- I. Isolation Valve or System Valve Leak Check: For valves not associated with coils.
1. With full pressure in the system, command valve closed.
 2. Use an ultra-sonic flow meter to detect flow or leakage.

3.06 TEST PROCEDURES - GENERAL

- A. Provide skilled technicians to execute starting of equipment and to execute the Functional Tests. Ensure that they are available and present during the agreed upon schedules and for sufficient duration to complete the necessary tests, adjustments and problem-solving.
- B. Provide all necessary materials and system modifications required to produce the flows, pressures, temperatures, and conditions necessary to execute the test according to the specified conditions. At completion of the test, return all affected equipment and systems to their pre-test condition.
- C. Sampling: Where Functional Testing of fewer than the total number of multiple identical or near-identical items is explicitly permitted, perform sampling as follows:
1. Identical Units: Defined as units with same application and sequence of operation; only minor size or capacity difference.
 2. Sampling is not allowed for:
 - a. Major equipment.
 - b. Life-safety-critical equipment.
 - c. Prefunctional Checklist execution.
 3. XX = the percent of the group of identical equipment to be included in each sample; defined for specific type of equipment.
 4. YY = the percent of the sample that if failed will require another sample to be tested; defined for specific type of equipment.
 5. Randomly test at least XX percent of each group of identical equipment, but not less than three units. This constitutes the "first sample."
 6. If YY percent of the units in the first sample fail, test another XX percent of the remaining identical units.
 7. If YY percent of the units in the second sample fail, test all remaining identical units.
 8. If frequent failures occur, the Commissioning Provider may stop the testing and require CMGC Contractor to perform and document a checkout of the remaining units prior to continuing testing.
- D. Manual Testing: Use hand-held instruments, immediate control system readouts, or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the "observation").
- E. Simulating Conditions: Artificially create the necessary condition for the purpose of testing the response of a system; for example apply hot air to a space sensor using a hair dryer to see the response in a VAV box.
- F. Simulating Signals: Disconnect the sensor and use a signal generator to send an amperage, resistance or pressure to the transducer and control system to simulate the sensor value.
- G. Over-Writing Values: Change the sensor value known to the control system in the control system to see the response of the system; for example, change the outside air temperature value from 50 degrees F to 75 degrees F to verify economizer operation.

- H. Indirect Indicators: Remote indicators of a response or condition, such as a reading from a control system screen reporting a damper to be 100 percent closed, are considered indirect indicators.
- I. Monitoring: Record parameters (flow, current, status, pressure, etc.) of equipment operation using dataloggers or the trending capabilities of the relevant control systems; where monitoring of specific points is called for in Functional Test Procedures:
 - 1. All points that are monitored by the relevant control system shall be trended by CMGC Contractor ; at the Commissioning Provider's request, CMGC Contractor shall trend up to 20 percent more points than specified at no extra charge.
 - 2. Other points will be monitored by the Commissioning Provider using dataloggers.
 - 3. At the option of the Commissioning Provider, some control system monitoring may be replaced with datalogger monitoring.
 - 4. Provide hard copies of monitored data in columnar format with time down left column and at least 5 columns of point values on same page.
 - 5. Graphical output is desirable and is required for all output if the system can produce it.
 - 6. Monitoring may be used to augment manual testing.

3.07 OPERATION AND MAINTENANCE MANUALS

- A. See Section 01 7800 - Closeout Submittals for additional requirements.
- B. Add design intent documentation furnished by Architect to manuals prior to submission to Owner.
- C. Submit manuals related to items that were commissioned to Commissioning Provider for review; make changes recommended by Commissioning Provider.

END OF SECTION

This page intentionally left blank

**SECTION 02 4100
DEMOLITION**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Building demolition excluding removal of hazardous materials and toxic substances.
- B. Selective demolition of built site elements.
- C. Selective demolition of building elements for alteration purposes.
- D. Abandonment and removal of existing utilities and utility structures.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on CMGC Contractor 's use of site and premises.
- B. Section 01 1000 - Summary: Sequencing and staging requirements.
- C. Section 01 1000 - Summary: Description of items to be salvaged or removed for re-use by CMGC Contractor .
- D. Section 01 5000 - Temporary Facilities and Controls: Site fences, security, protective barriers, and waste removal.
- E. Section 01 5713 - Temporary Erosion and Sediment Control.
- F. Section 01 6000 - Product Requirements: Handling and storage of items removed for salvage and relocation.
- G. Section 01 7000 - Execution and Closeout Requirements: Project conditions; protection of bench marks, survey control points, and existing construction to remain; reinstallation of removed products; temporary bracing and shoring.
- H. Section 01 7419 - Construction Waste Management and Disposal: Limitations on disposal of removed materials; requirements for recycling.
- I. Section 07 0150.19 - Preparation for Re-Roofing: Removal of existing roofing, roof insulation, flashing, trim, and accessories.
- J. Section 31 1000 - Site Clearing: Vegetation and existing debris removal.
- K. Section 31 2200 - Grading: Topsoil removal.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2027.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Site Plan: Showing:
 - 1. Vegetation to be protected.
 - 2. Areas for temporary construction and field offices.
 - 3. Areas for temporary and permanent placement of removed materials.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities and subsurface construction.

PART 2 PRODUCTS

2.01 MATERIALS

- A. N/A

PART 3 EXECUTION

3.01 SCOPE

- A. Remove portions of existing buildings:

1. see plans for extent.
- B. Remove other items indicated, for salvage, relocation, and recycling.

3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. Comply with other requirements specified in Section 01 7000.
- B. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
 1. Obtain required permits.
 2. Comply with applicable requirements of NFPA 241.
 3. Use of explosives is not permitted.
 4. Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 5. Provide, erect, and maintain temporary barriers and security devices.
 6. Use physical barriers to prevent access to areas that could be hazardous to workers or the public.
 7. Conduct operations to minimize effects on and interference with adjacent structures and occupants.
 8. Do not close or obstruct roadways or sidewalks without permit.
 9. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
 10. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.
- C. Do not begin removal until receipt of notification to proceed from Owner.
- D. Do not begin removal until built elements to be salvaged or relocated have been removed.
- E. Do not begin removal until vegetation to be relocated has been removed and specified measures have been taken to protect vegetation to remain.
- F. Protect existing structures and other elements that are not to be removed.
 1. Provide bracing and shoring.
- G. Minimize production of dust due to demolition operations; do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- H. If hazardous materials are discovered during removal operations, stop work and notify Architect and Owner; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.

3.03 EXISTING UTILITIES

- A. Coordinate work with utility companies; notify before starting work and comply with their requirements; obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Owner.
- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least a 7 day prior written notification to Owner.
- F. Locate and mark utilities to remain; mark using highly visible tags or flags, with identification of utility type; protect from damage due to subsequent construction, using substantial barricades if necessary.
- G. Remove exposed piping, valves, meters, equipment, supports, and foundations of disconnected and abandoned utilities.

- H. Prepare building demolition areas by disconnecting and capping utilities outside the demolition zone; identify and mark utilities to be subsequently reconnected, in same manner as other utilities to remain.

3.04 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as indicated.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Separate areas in which demolition is being conducted from other areas that are still occupied.
 - 1. Provide, erect, and maintain temporary dustproof partitions of construction specified in Section 01 5000 in locations indicated on drawings.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
- D. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction specified.
 - 2. Remove items indicated on drawings.
- E. Services (Including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove existing systems and equipment as indicated.
 - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
 - 2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - 3. See Section 01 1000 for other limitations on outages and required notifications.
 - 4. Verify that abandoned services serve only abandoned facilities before removal.
 - 5. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub and tag with identification.
- F. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
 - 4. Patch as specified for patching new work.

3.05 DEBRIS AND WASTE REMOVAL

- A. Remove debris, junk, and trash from site.
- B. Remove from site all materials not to be reused on site; comply with requirements of Section 01 7419 - Waste Management.
- C. Leave site in clean condition, ready for subsequent work.
- D. Clean up spillage and wind-blown debris from public and private lands.

END OF SECTION

This page intentionally left blank

**SECTION 03 4500
PRECAST ARCHITECTURAL CONCRETE**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Architectural precast concrete cap at top of CMU veneer.
- B. Architectural precast concrete accessories.
- C. Supports, anchors, and attachments.

1.02 RELATED REQUIREMENTS

- A. Section 03 3000 - Cast-in-Place Concrete: Admixtures.
- B. Section 07 9200 - Joint Sealants: Sealing perimeter and intermediate joints.

1.03 REFERENCE STANDARDS

- A. ACI CODE-318 - Building Code for Structural Concrete—Code Requirements and Commentary; 2025.
- B. ASTM A36/A36M - Standard Specification for Carbon Structural Steel; 2019.
- C. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2023.
- D. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement; 2026.
- E. ASTM C150/C150M - Standard Specification for Portland Cement; 2024.
- F. ASTM C260/C260M - Standard Specification for Air-Entraining Admixtures for Concrete; 2024.
- G. ASTM C979/C979M - Standard Specification for Pigments for Integrally Colored Concrete; 2024.
- H. ASTM C1602/C1602M - Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete; 2022.
- I. PCI MNL-117 - Manual for Quality Control for Plants and Production of Architectural Precast Concrete Products; 2013.
- J. PCI MNL-120 - PCI Design Handbook; 2025.
- K. PCI MNL-122 - Architectural Precast Concrete; 2007.
- L. PCI MNL-123 - Connections Manual: Design and Typical Details of Connections for Precast and Prestressed Concrete; 1988.
- M. PCI MNL-135 - Tolerance Manual for Precast and Prestressed Concrete Construction; 2000.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Manufacturer's information on accessory products, including pigments, admixtures, inserts, plates, etc.
- C. Shop Drawings: Indicate layout, unit locations, configuration, unit identification marks, reinforcement, integral insulation, insulated panel system connectors, connection details, support items, location of lifting devices, dimensions, openings, and relationship to adjacent materials. Provide erection drawings.
- D. Samples: Submit two _____, 12" by 12" inch in size, illustrating surface finish, color and texture.
- E. Maintenance Data: Indicate surface cleaning instructions.

1.05 QUALITY ASSURANCE

- A. Fabricator Qualifications:

1. Firm having at least 2 years of documented experience in production of precast concrete of the type required.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Handling: Lift and support precast units only from support points.
- B. Protect units to prevent staining, chipping, or spalling of concrete.

PART 2 PRODUCTS

2.01 PRECAST UNITS, GENERAL

- A. Precast Architectural Concrete Units: Comply with PCI MNL-120, PCI MNL-122, PCI MNL-123, PCI MNL-135, and ACI CODE-318.
 1. Concrete Face Mix: Minimum 5000 psi, 28 day strength, air entrained to 5 to 7 percent; comply with ACI SPEC-301.
- B. Finish Type A: Ensure exposed-to-view finish surfaces of precast units are uniform in color and appearance. Replace any units deemed not acceptable by the architect
- C. Hone any exposed to view edges which are rough or otherwise unfinished looking.

2.02 REINFORCEMENT

- A. Reinforcing Steel: ASTM A615/A615M, Grade 60 (60,000 psi).
 1. Deformed billet-steel bars.

2.03 CONCRETE MATERIALS

- A. Cement: ASTM C150/C150M, Type I - Normal Portland type.
- B. Color Additives: Pure, concentrated mineral pigments specifically intended for mixing into concrete and complying with ASTM C979/C979M.
 1. Color(s): As selected by Architect from manufacturer's full range.
- C. Water: ASTM C1602/C1602M; clean, potable, and not detrimental to concrete.
- D. Air Entrainment Admixture: ASTM C260/C260M.

2.04 SUPPORT DEVICES

- A. Connecting and Support Devices; Anchors and Inserts: ASTM A36/A36M steel; hot-dip galvanized in accordance with ASTM A153/A153M.
 1. Clean surfaces of rust, scale, grease, and foreign matter.

2.05 FABRICATION

- A. Fabricate in compliance with PCI MNL-117 and PCI MNL-135.
- B. Maintain consistent quality during manufacture.
- C. Fabricate connecting devices, plates, angles, items fit to steel framing members, inserts, bolts, and accessories. Fabricate to permit initial placement and final attachment.
- D. Embed reinforcing steel, anchors, inserts plates, angles, and other cast-in items.
- E. Cure units to develop concrete quality, and to minimize appearance blemishes such as non-uniformity, staining, or surface cracking.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that building structure, anchors, devices, and openings are ready to receive work of this section.

3.02 ERECTION

- A. Erect units without damage to shape or finish. Replace or repair damaged panels.
- B. Erect units level and plumb within allowable tolerances.
- C. Fasten units in place with mechanical connections.

3.03 PROTECTION

- A. Protect installed wall caps from subsequent construction operations.

3.04 SCHEDULES

- A. Profiles: see architectural drawings for profiles.

END OF SECTION

This page intentionally left blank

**SECTION 04 7300
MANUFACTURED STONE MASONRY**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Adhered manufactured stone masonry veneer (AMSMV).
- B. Installation materials.
- C. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 04 2000 - Unit Masonry: Through-wall masonry flashings.
- B. Section 05 4000 - Cold-Formed Metal Framing: Steel stud backup for AMSMV.
- C. Section 07 2500 - Weather Barriers: Water-resistive barrier over sheathing.
- D. Section 07 6200 - Sheet Metal Flashing and Trim: Through-wall masonry flashings.
- E. Section 09 2236 - Lath: Lathing and accessories for scratch coat.

1.03 REFERENCE STANDARDS

- A. ASTM C270 - Standard Specification for Mortar for Unit Masonry; 2025b.
- B. ASTM C841 - Standard Specification for Installation of Interior Lathing and Furring; 2023.
- C. ASTM C847 - Standard Specification for Metal Lath; 2018 (Reapproved 2024).
- D. ASTM C926 - Standard Specification for Application of Portland Cement-Based Plaster; 2026.
- E. ASTM C1063 - Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster; 2025a.
- F. ASTM C1670/C1670M - Standard Specification for Adhered Manufactured Stone Masonry Veneer Units; 2024a.
- G. ASTM C1714/C1714M - Standard Specification for Preblended Dry Mortar Mix for Unit Masonry; 2025.
- H. ASTM C1780 - Standard Practice for Installation Methods for Cement-Based Adhered Masonry Veneer; 2026.
- I. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- J. ICC-ES AC51 - Acceptance Criteria for Adhered Manufactured Stone Masonry Veneer; 2018, with Editorial Revision (2021).
- K. NCMA (AMSV) - Installation Guide and Detailing Options for Compliance with ASTM C1780 for Adhered Manufactured Stone Veneer; Current Edition, Including All Revisions.
- L. NCMA TEK 20-01 - Key Installation Checkpoints for Manufactured Stone Veneer; 2014.
- M. TMS 402/602 - Building Code Requirements and Specification for Masonry Structures; 2022, with Errata (2024).

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Samples: Submit four samples of AMSMV units to illustrate color, texture, and extremes of color range.

1.05 MOCK-UPS

- A. Construct mock-up panel 6 feet long by 6 feet high; include AMSMV, lightweight synthetic stone veneer, mortar, accessories, substrate, and representative wall openings.
- B. See Section 01 4000 - Quality Requirements for additional requirements.
- C. Mock-up may remain as part of the work.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Store products in manufacturer's unopened packaging until ready for installation.
- B. Protect products from precipitation combined with freezing temperatures. Do not install products with visible frozen moisture.
- C. Protect Portland cement based materials from moisture and humidity. Store under cover off the ground in a dry location.

1.07 FIELD CONDITIONS

- A. Cold and Hot Weather Requirements: Comply with requirements of TMS 402/602 or applicable building code, whichever is more stringent.

1.08 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.
- B. Correct defective work within a five year period after Date of Substantial Completion.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Adhered Manufactured Stone Masonry Veneer (AMSMV):
 - 1. Eldorado Stone, Westlake Royal Building Products:
www.westlakeroyalbuildingproducts.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 ADHERED MANUFACTURED STONE MASONRY VENEER (AMSMV)

- A. AMSMV: Cast masonry units using a mixture of cement, lightweight aggregates, concrete additives and color pigments to replicate appearance of natural stone and designed to be applied with a cementitious mortar to a backing surface, complying with ASTM C1670/C1670M and ICC-ES AC51.
 - 1. Style: As indicated on drawings.
 - 2. Color, Texture, Range, Special Shapes: As indicated on drawings.
 - 3. Walls: Provide with single color and texture throughout.

2.03 MORTAR APPLICATIONS

- A. Use only factory premixed packaged dry materials for mortar, with addition of water only at project site.
 - 1. Exception: If a specified mix design is not available in a premixed dry package, provide equivalent mix design using standard non-premixed materials.

2.04 MORTAR MIXES

- A. Packaged Dry Material for Mortar for Unit Masonry: Premixed Portland cement, hydrated lime, and sand; complying with ASTM C1714/C1714M and capable of producing mortar of specified strength in accordance with ASTM C270 with addition of water only.
 - 1. Type: Type S.
 - 2. Color: Mineral pigments added as required to produce approved color sample.

2.05 ACCESSORIES

- A. Lath: See Section 09 2236.
- B. Metal Lath with Rainscreen Drainage Material: Factory-assembled combination of mesh drainage material and metal lath.
 - 1. Diamond Mesh Metal Lath: ASTM C847, galvanized, self-furring.
 - a. Weight: To suit application and as specified in ASTM C841 for framing spacing.
 - b. Weight: 2.5 lb/sq yd, minimum.
 - 2. Rainscreen Drainage Mesh: 90 percent open non-woven polyester mesh.
 - a. Thickness: 1/4 inch.

- b. Surface Burning Characteristics: Flame spread index of 25 or less, smoke developed index of 450 or less (Class A), when tested in accordance with ASTM E84.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that backup wall system construction complies with AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 and ICC-ES AC51.
- B. Verify that substrates to receive mortar scratch coat or setting bed comply with AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 and ICC-ES AC51:
 - 1. Concrete Masonry: Verify joints are cut flush and surface is ready to receive mortar setting bed. Verify no bituminous or water repellent coatings exist on masonry surface.
 - 2. Metal Lath and Accessories: Verify lath is flat, secured to substrate, and joint and surface perimeter accessories are in place.
- C. Verify that related items provided under other sections are properly sized and located.
- D. Verify that built-in items are in proper location, and ready for installation of AMSMV.

3.02 INSTALLATION - WATER-RESISTIVE BARRIER

- A. Where required by AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 or ICC-ES AC51, install 2 layers of water-resistive barrier in accordance with water-resistive barrier manufacturer's instructions. Integrate water-resistive barrier with all flashing accessories, adjacent water-resistive barriers, doors, windows, penetrations, and cladding transitions.

3.03 INSTALLATION - RAINSCREEN DRAINAGE MATERIAL

- A. Install rainscreen drainage material and metal lath with accessories over sheathing material and water-resistive barrier with fastening system in accordance with ASTM C1063 into wood or metal studs. Install drainage material with filter fabric mortar screen to exterior.
- B. Install metal lath with rainscreen drainage material in accordance with manufacturer's instructions.

3.04 INSTALLATION - SCRATCH COAT

- A. Apply mortar scratch coat of 1/2 inch nominal to cover metal lath in accordance with ASTM C926. Scratch surface when somewhat firm. If scratch coat dries before applying setting bed mortar and AMSMV, moisten scratch coat by misting it with water.

3.05 INSTALLATION - AMSMV

- A. Install AMSMV with a cementitious mortar setting bed to a scratch coat backing surface, in accordance with AMSMV manufacturer's instructions, NCMA (AMSV), NCMA TEK 20-01, ASTM C1780 and ICC-ES AC51.
- B. Mortar Joints: Flush.
 - 1. Style: Wide overgrout.
- C. Windows, Doors and Wall Openings: Butt AMSMV units to wall opening.
- D. Sills: Install sills where located on drawings.
- E. Caps: Install capstones where located on drawings.
- F. Seal all joints at wall openings and penetrations with sealant approved for use with AMSMV.

3.06 INSTALLATION - MASONRY FLASHINGS

- A. Whether or not specifically indicated, install masonry flashing to divert water to exterior at all locations where downward flow of water will be interrupted.

3.07 CUTTING AND FITTING

- A. Cut and fit for pipes and conduit. Coordinate with other sections of work to provide correct size, shape, and location.

3.08 CLEANING

- A. Remove excess mortar and mortar smears as work progresses.
- B. Replace defective mortar. Match adjacent work.
- C. Clean AMSMV in accordance with manufacturer's installation instructions.
- D. Clean soiled surfaces with cleaning solution.

END OF SECTION

**SECTION 06 1000
ROUGH CARPENTRY**

PART 1 GENERAL

1.01 SECTION INCLUDES (SEE STRUCTURAL SHEET NOTES)

- A. Nonstructural dimension lumber framing.
- B. Rough opening framing for doors, windows, and roof openings.
- C. Sheathing.
- D. Roof-mounted curbs.
- E. Roofing nailers.
- F. Preservative treated wood materials.
- G. Miscellaneous framing and sheathing.
- H. Concealed wood blocking, nailers, and supports.
- I. Miscellaneous wood nailers, furring, and grounds.

1.02 RELATED REQUIREMENTS

- A. Section 05 1200 - Structural Steel Framing: Prefabricated beams and columns for support of wood framing.
- B. Section 05 5000 - Metal Fabrications: Miscellaneous steel connectors and support angles for wood framing.
- C. Section 07 6200 - Sheet Metal Flashing and Trim:

1.03 REFERENCE STANDARDS

- A. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware; 2023.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- C. AWC (WFCM) - Wood Frame Construction Manual for One- and Two-Family Dwellings; 2024, with Errata.
- D. AWPA U1 - Use Category System: User Specification for Treated Wood; 2025.
- E. PS 1 - Structural Plywood; 2023.
- F. PS 20 - American Softwood Lumber Standard; 2025.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide technical data on wood preservative materials.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. General: Cover wood products to protect against moisture. Support stacked products to prevent deformation and to allow air circulation.

1.06 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

- A. Dimension Lumber: Comply with PS 20 and requirements of specified grading agencies.
 - 1. Species: Douglas Fir, unless otherwise indicated. See structural dwgs
 - 2. Grading Agency: Grading agency whose rules are approved by the Board of Review, American Lumber Standard Committee at www.alsc.org, and who provides grading

service for the species and grade specified; provide lumber stamped with grade mark unless otherwise indicated.

- B. Lumber fabricated from old growth timber is not permitted.

2.02 DIMENSION LUMBER FOR CONCEALED APPLICATIONS

- A. Sizes: Nominal sizes as indicated on drawings, S4S.
- B. Moisture Content: S-dry or MC19.
- C. Stud Framing (2 by 2 through 2 by 6):
 - 1. Grade: No. 2. or better
- D. Joist, Rafter, and Small Beam Framing (2 by 6 through 4 by 16):
 - 1. Machine stress-rated (MSR) as follows:
 - 2. Species: Douglas Fir.
- E. Miscellaneous Framing, Blocking, Nailers, Grounds, and Furring:
 - 1. Lumber: S4S, No. 2 or Standard Grade.
 - 2. Boards: Standard or No. 3.

2.03 CONSTRUCTION PANELS

- A. Communications and Electrical Room Mounting Boards: PS 1 A-D plywood, or medium density fiberboard; 3/4 inch thick; flame spread index of 25 or less, smoke developed index of 450 or less, when tested in accordance with ASTM E84.

2.04 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Metal and Finish: Hot-dipped galvanized steel complying with ASTM A153/A153M for high humidity and preservative-treated wood locations, unfinished steel elsewhere.

2.05 FACTORY WOOD TREATMENT

- A. Treated Lumber and Plywood: Comply with requirements of AWWA U1 - Use Category System for wood treatments determined by use categories, expected service conditions, and specific applications.
 - 1. Fire-Retardant Treated Wood: Mark each piece of wood with producer's stamp indicating compliance with specified requirements.
 - 2. Preservative-Treated Wood: Provide lumber and plywood marked or stamped by an ALSC-accredited testing agency, certifying level and type of treatment in accordance with AWWA standards.
- B. Preservative Treatment:
 - 1. Preservative Pressure Treatment of Lumber Above Grade: AWWA U1, Use Category UC3B, Commodity Specification A using waterborne preservative.
 - a. Kiln dry lumber after treatment to maximum moisture content of 19 percent.
 - b. Treat lumber exposed to weather.
 - c. Treat lumber in contact with roofing, flashing, or waterproofing.
 - d. Treat lumber in contact with masonry or concrete.
 - e. Treat lumber less than 18 inches above grade.
 - f. Treat lumber in other locations as indicated.
 - 2. Preservative Pressure Treatment of Plywood Above Grade: AWWA U1, Use Category UC2 and UC3B, Commodity Specification F using waterborne preservative.
 - a. Kiln dry plywood after treatment to maximum moisture content of 19 percent.
 - b. Treat plywood in contact with roofing, flashing, or waterproofing.
 - c. Treat plywood in contact with masonry or concrete.
 - d. Treat plywood less than 18 inches above grade.
 - e. Treat plywood in other locations as indicated.

PART 3 EXECUTION

3.01 PREPARATION

- A. Where wood framing bears on cementitious foundations, install full width sill flashing continuous over top of foundation, lap ends of flashing minimum of 4 inches and seal.
- B. Coordinate installation of rough carpentry members specified in other sections.

3.02 INSTALLATION - GENERAL

- A. Select material sizes to minimize waste.
- B. Reuse scrap to the greatest extent possible; clearly separate scrap for use on site as accessory components, including: shims, bracing, and blocking.

3.03 FRAMING INSTALLATION

- A. Set structural members level, plumb, and true to line. Discard pieces with defects that would lower required strength or result in unacceptable appearance of exposed members.
- B. Make provisions for temporary construction loads, and provide temporary bracing sufficient to maintain structure in true alignment and safe condition until completion of erection and installation of permanent bracing.
- C. Install structural members full length without splices unless otherwise specifically detailed.
- D. Comply with member sizes, spacing, and configurations indicated, and fastener size and spacing indicated, but not less than required by applicable codes and AWC (WFCM) Wood Frame Construction Manual.
- E. Install horizontal spanning members with crown edge up and not less than 1-1/2 inches of bearing at each end.
- F. Frame wall openings with two or more studs at each jamb; support headers on cripple studs.

3.04 BLOCKING, NAILERS, AND SUPPORTS

- A. Provide framing and blocking members as indicated or as required to support finishes, fixtures, specialty items, and trim.
- B. In walls, provide blocking attached to studs as backing and support for wall-mounted items, unless item can be securely fastened to two or more studs or other method of support is explicitly indicated.
- C. Where ceiling-mounting is indicated, provide blocking and supplementary supports above ceiling, unless other method of support is explicitly indicated.
- D. Provide the following specific nonstructural framing and blocking:
 - 1. Cabinets and shelf supports.
 - 2. Wall brackets.
 - 3. Handrails.
 - 4. Grab bars.
 - 5. Towel and bath accessories.
 - 6. Wall-mounted door stops.
 - 7. Wall mounted medical equipment or other as directed by owner
 - 8. Art work as directed by owner
 - 9. Chalkboards and marker boards.
 - 10. Wall paneling and trim.
 - 11. Joints of rigid wall coverings that occur between studs.

3.05 ROOF-RELATED CARPENTRY

- A. Coordinate installation of roofing carpentry with deck construction, framing of roof openings, and roofing assembly installation.
- B. Provide wood curb at each roof opening except where prefabricated curbs are specified and where specifically indicated otherwise; form corners by alternating lapping side members.

3.06 INSTALLATION OF CONSTRUCTION PANELS

- A. Wall Sheathing: Secure with long dimension perpendicular to wall studs, with ends over firm bearing and staggered, using nails, screws, or staples.
- B. Communications and Electrical Room Mounting Boards: Secure with screws to studs with edges over firm bearing; space fasteners at maximum 24 inches on center on all edges and into studs in field of board.
 - 1. At fire-rated walls, install board over wall board indicated as part of the fire-rated assembly.
 - 2. Where boards are indicated as full floor-to-ceiling height, install with long edge of board parallel to studs.
 - 3. Install adjacent boards without gaps.
 - 4. Size and Location: As indicated on drawings.

3.07 TOLERANCES

- A. Framing Members: 1/4 inch from true position, maximum.
- B. Variation from Plane, Other than Floors: 1/4 inch in 10 feet maximum, and 1/4 inch in 30 feet maximum.

3.08 CLEANING

- A. Do not leave wood, shavings, sawdust, etc. on the ground or buried in fill.
- B. Prevent sawdust and wood shavings from entering the storm drainage system.

END OF SECTION

**SECTION 07 1300
VAPOR BARRIER**

PART 1 – GENERAL

1.01 SUMMARY

- A. Products supplied under this section:
 - 1. Vapor barrier and installation accessories for installation under concrete slabs.
- B. Related sections:
 - 1. Section 07 26 00 Vapor Retarders

REFERENCES

- A. American Society for Testing and Materials (ASTM):
 - 1. ASTM E1745- 11Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill Under Concrete Slabs.
 - 2. ASTM E1643- 11Selection, Design, Installation, and Inspection of Water Vapor Retarders Used in Contact with Earth or Granular Fill Under Concrete Slabs.
- B. Technical Reference - American Concrete Institute (ACI):
 - 1. ACI 302.2R-06 Guide for Concrete Slabs that Receive Moisture-Sensitive Flooring Materials.
 - 2. ACI 302.1R-15 Guide to Concrete Floor and Slab Construction.

SUBMITTALS

- A. Quality control/assurance:
 - 1. Summary of test results per paragraph 9.3 of ASTM E1745.
 - 2. Manufacturer's samples and literature.
 - 3. Manufacturer's installation instructions for placement, seaming, penetration prevention and repair, and perimeter seal per ASTM E1643.
 - 4. All mandatory ASTM E1745 testing must be performed on a single production roll per ASTM E1745 Section 8.1.
 - 5. Contact vapor barrier manufacturer to schedule a pre-construction meeting and to coordinate a review, in-person or digital, of the vapor barrier installation.
 - 6. Vapor barrier manufacturer must warrant in writing (a) compliance with the designated ASTM E1745 classification, and (b) no manufacturing defects in the product for, at least, the Life of the Building.
 - 7. Manufacturer verify in writing 20 years in the industry with no reported product failures.

PART 2 – PRODUCTS

4.01 MATERIALS

4.02 VAPOR BARRIER SHALL HAVE ALL OF THE FOLLOWING QUALITIES:

- 1. Maintain permeance of less than 0.01 Perms [grains/(ft² · hr · inHg)] as tested in accordance with mandatory conditioning tests per ASTM E1745 Section 7.1 (7.1.1-7.1.5).
- 2. Other performance criteria:
 - a. Strength: ASTM E1745 Class A.
 - b. Thickness: 15 mils minimum
- 3. Provide third party documentation that all testing was performed on a single production roll per ASTM E1745 Section 8.1
- B. Vapor barrier products:
 - 1. Basis of Design: Stego Wrap Vapor Barrier (15-mil) by Stego Industries LLC., (877) 464-7834 www.stegoindustries.com.
 - 2. No substitutions.

ACCESSORIES

- A. Seams:

STEGO TAPE BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

- A. Sealing Penetrations of Vapor barrier:

STEGO MASTIC BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

STEGO TAPE BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

- A. Stego Crete Claw by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com.

STEGO TERM BAR BY STEGO INDUSTRIES LLC, (877) 464-7834 WWW.STEGOINDUSTRIES.COM.

1. StegoTack Tape (double-sided sealant tape) by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com.
- B. Penetration Prevention:
 1. Beast Foot by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com.
 2. Beast Form Stake by Stego Industries LLC, (877) 464-7834 www.stegoindustries.com
- C. Vapor Barrier-Safe Screed System
 1. Beast Screed by Stego Industries, LLC, (877) 464-7834 www.stegoindustries.com.

PART 3 – EXECUTION

10.01 PREPARATION

- A. Ensure that bottom of joist are free of sharp objects that can penetrate the vapor barrier

INSTALLATION

- A. Install vapor barrier in accordance ASTM E1643.
1. Unroll vapor barrier with the longest dimension parallel with the direction of the crawl space and face laps away from the expected direction of the placement whenever possible.
 2. Extend vapor barrier to the perimeter of the foundation. Terminate it 6" below the top of the foundation.
 3. Crete Claw is the best option. When sealing to a stem wall or wall,
 4. the best option is to use StegoTack Tape or both StegoTack Tape and Stego Term Bar.]
 - a. OR
 - b. Seal vapor barrier to the entire perimeter wall or footing/grade beam with double sided StegoTack Tape, or both Stego Term Bar and StegoTack Tape, per manufacturer's instructions. Ensure the concrete is clean and dry prior to adhering tape.
 5. Overlap joints 6 inches and seal with manufacturer's seam tape.
 6. Apply seam tape/Crete Claw to a clean and dry vapor barrier.
 7. Seal all penetrations (including pipes) and mechanical attachments per manufacturer's instructions.
 8. Repair damaged areas with vapor barrier material of similar (or better) permeance, puncture and tensile.

END OF SECTION

SECTION 07 2100 THERMAL INSULATION

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Board insulation at exterior wall behind _____ wall finish.

1.02 RELATED REQUIREMENTS

1.03 REFERENCE STANDARDS

- A. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation; 2023.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on product characteristics, performance criteria, and product limitations.
- C. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

1.05 FIELD CONDITIONS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

PART 2 PRODUCTS

2.01 APPLICATIONS

- A. Insulation Over Wood Stud Framed Walls, Continuous: Extruded polystyrene (XPS) board.

2.02 FOAM BOARD INSULATION MATERIALS

- A. Extruded Polystyrene (XPS) Continuous Insulation (CI) Board: Comply with ASTM C578, and manufactured using carbon black technology.
 - 1. Flame Spread Index (FSI): Class A - 0 to 25, when tested in accordance with ASTM E84.
 - 2. Smoke Developed Index (SDI): 450 or less, when tested in accordance with ASTM E84.
 - 3. Type and Thermal Resistance, R-value: Type IV, 5.6 (0.98), minimum, per 1 inch thickness at 75 degrees F mean temperature.
 - 4. Board Size: 48 inch by 96 inch.
 - 5. Board Thickness: 1-3/4 inch.
 - 6. Board Edges: Shiplap, at long edges.

2.03 ACCESSORIES

- A. Adhesive: Type recommended by insulation manufacturer for application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate, adjacent materials, and insulation materials are dry and that substrates are ready to receive insulation.
- B. Verify substrate surfaces are flat, free of honeycomb, fins, irregularities, or materials or substances that may impede adhesive bond.

3.02 BOARD INSTALLATION AT EXTERIOR WALLS

- A. Adhere 6 inches wide strip of polyethylene sheet over expansion joints with double beads of adhesive each side of joint.
- B. Apply adhesive to back of boards:
- C. Install boards horizontally on walls.

1. Place boards to maximize adhesive contact.
 2. Butt edges and ends tightly to adjacent boards and protrusions.
- D. Extend boards over expansion joints, unbonded to wall on one side of joint.
- E. Cut and fit insulation tightly to protrusions or interruptions to the insulation plane.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements for additional requirements.

3.04 PROTECTION

- A. Do not permit installed insulation to be damaged prior to its concealment.

END OF SECTION

SECTION 07 2500 WEATHER BARRIERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Water-resistive barriers.

1.02 RELATED REQUIREMENTS

- A. Section 07 2100 - Thermal Insulation: Weather barrier installed in conjunction with batt insulation.
- B. Section 07 6200 - Sheet Metal Flashing and Trim: Metal flashings installed in conjunction with weather barriers.

1.03 DEFINITIONS

- A. Weather Barriers: Materials or assemblies forming water-resistive barriers, air barriers, vapor retarders, or combination of one or more assemblies.

1.04 REFERENCE STANDARDS

- A. ASTM D5590 - Standard Test Method for Determining the Resistance of Paint Films and Related Coatings to Fungal Defacement by Accelerated Four-Week Agar Plate Assay; 2026.
- B. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- C. ASTM E96/E96M - Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials; 2024a.
- D. ASTM E2178 - Standard Test Method for Determining Air Leakage Rate and Calculation of Air Permeance of Building Materials; 2021a.
- E. ASTM E2357 - Standard Test Method for Determining Air Leakage Rate of Air Barrier Assemblies; 2025.
- F. ICC-ES AC212 - Acceptance Criteria for Water-Resistive Coatings Used as Water-Resistive Barriers over Exterior Sheathing; 2015, with Editorial Revision (2020).

1.05 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on material characteristics.
- C. Shop Drawings: Provide drawings of special joint conditions.

1.06 FIELD CONDITIONS

- A. Maintain temperature and humidity recommended by materials manufacturers before, during, and after installation.

PART 2 PRODUCTS

2.01 WATER-RESISTIVE BARRIERS

- A. Description: Materials installed behind exterior wall coverings; designed to prevent liquid water from further penetration into exterior wall assembly. Primary materials include fluid-applied membranes; accessory materials include flashings and seam tapes.
- B. Weather-Resistive Barrier Coating: Fluid-applied air and water-resistive coating for various exterior substrates.
 - 1. Dry Film Thickness (DFT): 17 mils, 0.017 inch, minimum.
 - 2. Air Permeance, Building Assembly Air Leakage Rate: Not greater than 0.04 cfm/sq ft when tested at 1.57 psf in accordance with ASTM E2357.
 - 3. Air Permeance, Building Material Air Leakage Rate: 0.004 cfm/sq ft maximum leakage when tested at 1.57 psf pressure difference in accordance with ASTM E2178.
 - 4. Water-Resistive Barrier over Sheathing Compliance: Complying with ICC-ES AC212.

5. Water Vapor Permeance: Tested in accordance with ASTM E96/E96M.
 - a. Procedure A: Greater than 5 perms.
 - b. Procedure B: Greater than 14 perms.
6. Ultraviolet (UV) and Weathering Resistance: Approved by manufacturer for up to 120 days of weather exposure.
7. Surface Burning Characteristics: Flame spread index of 25 or less, smoke developed index of 450 or less, Class A when tested in accordance with ASTM E84.
8. Resistance to Fungal Growth: No growth when tested in accordance with ASTM D5590.
9. System Accessory Products: As recommended by coating manufacturer.

2.02 ACCESSORIES

- A. Flashings and Sealants: As recommended by water-resistive barrier manufacturer for application.
- B. Sealant for Cracks and Joints In Substrates: Resilient elastomeric joint sealant compatible with substrates and weather barrier materials.
 1. Application: Apply at 30 to 40 mil, 0.030 to 0.040 inch nominal thickness.
 2. Color: Green.
- C. Primer: Liquid applied polymer.
 1. Color: Green.
- D. Liquid Flashing: One part, fast curing, nonsag, elastomeric, gun grade, trowelable liquid flashing.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and conditions comply with requirements of this section.

3.02 PREPARATION

- A. Remove projections, protruding fasteners, and loose or foreign matter that might interfere with proper installation.

3.03 INSTALLATION

- A. Install materials in accordance with manufacturer's installation instructions.
- B. Fluid-Applied Membranes:
 1. Prepare substrate in accordance with coating manufacturer's installation instructions; treat joints in substrate and between dissimilar materials as indicated.
 2. Apply flashing to seal with adjacent construction and to bridge joints in coating substrate.
- C. Openings and Penetrations in Exterior Water-Resistive Barriers:
 1. Install flashing over sills, covering entire sill framing member, and extend at least 5 inches onto water-resistive barrier and at least 6 inches up jambs; mechanically fasten stretched edges.
 2. At openings filled with frames having nailing flanges, seal head and jamb flanges using a continuous bead of sealant compressed by flange and cover flanges with sealing tape at least 4 inches wide; do not seal sill flange.
 3. At openings filled with nonflanged frames, seal water-resistive barrier to each side of framing at opening using flashing at least 9 inches wide, and covering entire depth of framing.
 4. At head of openings, install flashing under water-resistive barrier extending at least 2 inches beyond face of jambs; seal water-resistive barrier to flashing.
 5. At interior face of openings, seal gaps between window and door frames and rough framing using appropriate joint sealant over backer rod.
 6. Service and Other Penetrations: Form flashing around penetrating items and seal to surface of water-resistive barrier.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements for additional requirements.

3.05 PROTECTION

- A. Do not leave materials exposed to weather longer than recommended by manufacturer.

END OF SECTION

This page intentionally left blank

**SECTION 07 4213.13
METAL WALL PANELS - MBCI**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Manufactured metal exterior wall panels.

1.02 RELATED REQUIREMENTS

- A. Section 06 1000 - Rough Carpentry: Wall panel substrate.
- B. Section 07 2500 - Weather Barriers: Weather barrier under wall panels.

1.03 REFERENCE STANDARDS

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Shop Drawings: Indicate dimensions, layout, joints, construction details, support clips, _____, and anchorage methods.
- C. Samples: Submit two samples of wall panel and soffit panel, 12 by 12 inches in size illustrating finish color, sheen, and texture.
- D. Warranty Documentation for Installation of Building Rainscreen Assembly: Submit installer warranty and ensure forms have been completed in Owner's name and registered with installer.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Protect panels from accelerated weathering by removing or venting sheet plastic shipping wrap.
- B. Store prefinished material off the ground and protected from weather; prevent twisting, bending, or abrasion; provide ventilation; slope metal sheets to ensure proper drainage.
- C. Prevent contact with materials that cause discoloration or staining of products.

1.06 FIELD CONDITIONS

- A. Do not install wall panels when air temperature or relative humidity is outside manufacturer's limits.

1.07 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Metal Wall Panels - Exposed Fasteners:
 - 1. MBCI, a Cornerstone Building Brands Company; Corrugated Panel: www.mbc.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.
- B. Metal Wall Panels - Concealed Fasteners:
 - 1. MBCI, a Cornerstone Building Brands Company; Designer Series 16.0 Fluted Panel: www.mbc.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PERFORMANCE REQUIREMENTS

- A. Metal Wall Panels: Provide exterior wall panels.
 - 1. Provide components to support assembly dead loads and to withstand live loads caused by positive and negative wind pressure acting normally to plane of wall.
 - 2. Maximum Allowable Deflection of Panel: L/180 for length (L) of span.
 - 3. Movement:

- a. Accommodate movement within system without damage to components or deterioration of seals
- b. Accommodate movement between system and perimeter components when subject to 100 degrees F temperature cycling.
- c. Accommodate dynamic loading and release of loads on system, as well as deflection of structural support framing.
4. Drainage: Provide positive drainage to exterior for moisture entering or condensation occurring within panel system.
5. Fabrication: Formed true to shape, accurate in size, square, and free from distortion or defects; select pieces of longest practical lengths.

2.03 METAL WALL PANEL SYSTEM

- A. Wall Panel System: Factory-fabricated, prefinished metal panel system; site assembled.
- B. Exterior Wall Panels:
 1. Profile: Vertical and horizontal, as indicated; style as indicated.
 2. Side Seams: Double-interlocked, tight-fitting, sealed with continuous gaskets.
 3. Material: Precoated steel sheet, 29-gauge, 0.014-inch minimum thickness.
 4. Panel Width: 24 inches.
 5. Color: As indicated on drawings.
- C. Trim: Same material, thickness, and finish as exterior sheets; brake-form to required profiles.

2.04 ATTACHMENT SYSTEM

- A. Concealed System: Provide manufacturer's standard stainless steel concealed anchor clips designed for specific wall panel system and engineered to meet performance requirements, including anticipated thermal movement.

2.05 FABRICATION

- A. Panels: Provide factory- or field-fabricated panels with applied finish and accessory items, using manufacturer's standard processes as required to achieve specified appearance and performance requirements.
- B. Joints: Provide captive gaskets, sealants, or separator strips at panel joints to ensure weathertight seals, eliminate metal-to-metal contact, and minimize noise from panel movements.

2.06 MATERIALS

- A. Precoated Steel Sheet: Hot-dip galvanized steel sheet, ASTM A653/A653M, Structural Steel (SS) or Forming Steel (FS), with G90/Z275 coating; continuous-coil coated on exposed surfaces with specified finish coating and on panel back with specified panel back coating.

2.07 ACCESSORIES

- A. Gaskets: Manufacturer's standard type suitable for use with system, permanently resilient; ultraviolet and ozone resistant.
- B. Fasteners: Manufacturer's standard type to suit application; with soft neoprene washers, steel, hot-dip galvanized. Fastener cap same color as exterior panel.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify building framing members are ready to receive panels.

3.02 PREPARATION

- A. Install sub-girts perpendicular to panel length, securely fastened to substrates and shimmed and leveled to uniform plane, and spaced at intervals indicated.
- B. Protect surrounding areas and adjacent surfaces from damage during execution of this work.

3.03 INSTALLATION

- A. Install panels on walls in accordance with manufacturer's instructions.
- B. Protect surfaces in contact with cementitious materials and dissimilar metals with bituminous paint; allow to dry prior to wall panel installation.
- C. Fasten panels to structural supports; align, level, and plumb.
- D. Locate joints over supports.
- E. Lap panel ends 2 inches, minimum.
- F. Use concealed fasteners unless otherwise indicated by Architect.
- G. Seal and place gaskets to prevent weather penetration. Maintain neat appearance.

3.04 TOLERANCES

3.05 CLEANING

- A. Remove site cuttings from finish surfaces.
- B. Remove protective material from wall panel surfaces.

3.06 PROTECTION

- A. Protect metal wall panels until completion of project.
- B. Touch up, repair, or replace damaged wall panels or accessories before Date of Substantial Completion.

END OF SECTION

This page intentionally left blank

**SECTION 07 6200
SHEET METAL FLASHING AND TRIM**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Fabricated sheet metal items, including flashings, counterflashings, and parapet coping/cap flashings.
- B. Sealants for joints within sheet metal fabrications.

1.02 REFERENCE STANDARDS

- A. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.
- B. ASTM A755/A755M - Standard Specification for Steel Sheet, Metallic Coated by the Hot-Dip Process and Prepainted by the Coil-Coating Process for Exterior Exposed Building Products; 2018 (Reapproved 2024).
- C. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2018 (Reapproved 2024).
- D. ASTM D226/D226M - Standard Specification for Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing; 2025.
- E. SMACNA (ASMM) - Architectural Sheet Metal Manual; 2012.

1.03 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.
- C. Samples: Submit two samples, ___ by ___ inches in size, illustrating metal finish color.

1.04 QUALITY ASSURANCE

- A. Perform work in accordance with SMACNA (ASMM) requirements and standard details, except as otherwise indicated.
- B. Fabricator and Installer Qualifications: Company specializing in sheet metal work with 3 years of documented experience.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

PART 2 PRODUCTS

2.01 PREPAINTED, METALLIC-COATED STEEL SHEETS

- A. Description: Factory-applied coatings applied to metallic-coated steel sheet substrates prior to fabrication by coil coating; topcoat systems consist of primers and organic topcoats on exposed, top side of sheet; washcoats on bottom, unexposed sheet side.
- B. Comply with ASTM A755/A755M.
- C. Metallic-Coated Steel Sheet Substrates:
 - 1. Zinc-Coated, Galvanized, Steel Sheets: Commercial steel sheets, galvanized by hot-dip process; comply with ASTM A653/A653M; coating designation G90.
- D. Substrate Preparation for Prefinishing: Clean and prepare substrate surfaces in accordance with coating manufacturer's recommendations for substrate type and application.
- E. Washcoats or Backercoats: Provide washcoats or backercoats in accordance with organic coating manufacturer's recommendations.

- F. Primer Coats: Provide basecoat primers in accordance with coating manufacturer's recommendations for substrate type, topcoat, and application.

2.02 FABRICATION

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Form pieces in longest possible lengths.
- C. Hem exposed edges on underside 1/2 inch; miter and seam corners.
- D. Form material with standing seams, except where otherwise indicated; at moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- E. Fabricate corners from one piece with minimum 18-inch long legs; seam for rigidity, seal with sealant.
- F. Fabricate vertical faces with bottom edge formed outward 1/4 inch and hemmed to form drip.
- G. Fabricate flashings to allow toe to extend 2 inches over roofing _____. Return and brake edges.

2.03 ACCESSORIES

- A. Fasteners: Galvanized steel, with soft neoprene washers.
- B. Underlayment: ASTM D226/D226M, organic roofing felt, Type I, No. 15.
- C. Primer Type: Zinc chromate.
- D. Concealed Sealants: Non-curing butyl sealant.
- E. Exposed Sealants: ASTM C920; elastomeric sealant, with minimum movement capability as recommended by manufacturer for substrates to be sealed; color to match adjacent material.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, and vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Back paint concealed metal surfaces with protective backing paint to a minimum dry film thickness of 15 mil, 0.015 inch.

3.03 INSTALLATION

- A. Insert flashings into reglets to form tight fit; secure in place with lead wedges; pack remaining spaces with lead wool; seal flashings into reglets with sealant.
- B. Secure flashings in place using concealed fasteners, and use exposed fasteners only where permitted.
- C. Apply plastic cement compound between metal flashings and felt flashings.
- D. Fit flashings tight in place; make corners square, surfaces true and straight in planes, and lines accurate to profiles.
- E. Seal metal joints watertight.

3.04 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements for field inspection requirements.
- B. Inspection will involve surveillance of work during installation to ascertain compliance with specified requirements.

END OF SECTION

**SECTION 08 1113
HOLLOW METAL FRAMES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Hollow metal frames for wood doors.

1.02 RELATED REQUIREMENTS

- A. Section 08 7100 - Door Hardware.
- B. Section 09 9123 - Interior Painting: Field painting.

1.03 ABBREVIATIONS AND ACRONYMS

- A. ANSI: American National Standards Institute.
- B. HMMA: Hollow Metal Manufacturers Association.
- C. NFPA: National Fire Protection Association.
- D. SDI: Steel Door Institute.
- E. UL: Underwriters Laboratories.

1.04 REFERENCE STANDARDS

- A. ADA Standards - 2010 ADA Standards for Accessible Design; 2010.
- B. ANSI/SDI A250.4 - Test Procedure and Acceptance Criteria for Physical Endurance for Steel Doors, Frames and Frame Anchors; 2026.
- C. ANSI/SDI A250.8 - Specifications for Standard Steel Doors and Frames (SDI-100); 2023.
- D. ANSI/SDI A250.10 - Test Procedure and Acceptance Criteria for Prime Painted Steel Surfaces for Steel Doors and Frames; 2025.
- E. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2025a.
- F. ASTM A1008/A1008M - Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable; 2026.
- G. ASTM A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength; 2025.
- H. ASTM C143/C143M - Standard Test Method for Slump of Concrete; 2026a.
- I. ASTM C476 - Standard Specification for Grout for Masonry; 2023.
- J. BHMA A156.115 - Hardware Preparation in Steel Doors and Frames; 2016.
- K. ICC A117.1 - Accessible and Usable Buildings and Facilities; 2017.
- L. NAAMM HMMA 830 - Hardware Selection for Hollow Metal Doors and Frames; 2002.
- M. NAAMM HMMA 831 - Hardware Locations for Hollow Metal Doors and Frames; 2024.
- N. NAAMM HMMA 840 - Guide Specifications for Receipt, Storage and Installation of Hollow Metal Doors and Frames; 2024.

1.05 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Materials and details of design and construction, hardware locations, reinforcement type and locations, anchorage and fastening methods, and finishes.
 - 1. **NOTE:** On doors receiving exit devices no universal preps are allowed and the doors shall be prepared specifically for the exit device functions as scheduled.

- C. Shop Drawings: Details of each opening, showing elevations, glazing, frame profiles, and any indicated finish requirements.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section, with not less than three years documented experience.
- B. Maintain at project site copies of reference standards relating to installation of products specified.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Comply with NAAMM HMMA 840 or ANSI/SDI A250.8 (SDI-100) in accordance with specified requirements.
- B. Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion and adverse effects on factory applied painted finish.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Hollow Metal Doors and Frames:
 - 1. Ceco Door, an Assa Abloy Group company; None - N/A: www.assaabloydss.com/#sle.
 - 2. Curries, an Assa Abloy Group company; None - N/A: www.assaabloydss.com/#sle.
 - 3. Fleming Door Products, an Assa Abloy Group company; None - N/A: www.assaabloydss.com/#sle.
 - 4. Republic Doors, an Allegion brand; None - N/A: www.republicdoor.com/#sle.
 - 5. Steelcraft, an Allegion brand; None - N/A: www.allegion.com/#sle.
 - 6. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PERFORMANCE REQUIREMENTS

- A. Requirements for Hollow Metal Doors and Frames:
 - 1. Steel Sheet: Comply with one or more of the following requirements; galvanized steel complying with ASTM A653/A653M, cold-rolled steel complying with ASTM A1008/A1008M, or hot-rolled pickled and oiled (HRPO) steel complying with ASTM A1011/A1011M, commercial steel (CS) Type B, for each.
 - 2. Accessibility: Comply with ICC A117.1 and ADA Standards.
 - 3. Exterior Door Top Closures: Flush end closure channel, with top and door faces aligned.
 - 4. Door Edge Profile: Manufacturers standard for application indicated.
 - 5. Typical Door Face Sheets: Flush.
 - 6. Glazed Lights: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings. Style: Manufacturer's standard.
 - 7. Hardware Preparations, Selections and Locations: Comply with NAAMM HMMA 830 and NAAMM HMMA 831 or BHMA A156.115 and ANSI/SDI A250.8 (SDI-100) in accordance with specified requirements.
 - 8. Zinc Coating for Typical Interior and/or Exterior Locations: Provide metal components zinc-coated (galvanized) and/or zinc-iron alloy-coated (galvanized) by the hot-dip process in accordance with ASTM A653/A653M, with manufacturer's standard coating thickness, unless noted otherwise for specific hollow metal doors and frames.
- B. Combined Requirements: If a particular door and frame unit is indicated to comply with more than one type of requirement, comply with the specified requirements for each type; for instance, an exterior door that is also indicated as being sound-rated must comply with the requirements specified for exterior doors and for sound-rated doors; where two requirements conflict, comply with the most stringent.

2.03 HOLLOW METAL FRAMES

- A. Comply with standards and/or custom guidelines as indicated for corresponding door in accordance with applicable door frame requirements.

- B. Frame Finish: Factory primed and field finished.
- C. Frames for Wood Doors: Comply with frame requirements in accordance with corresponding door.
- D. Provide mortar guard boxes for hardware cut-outs in frames to be installed in masonry or to be grouted.
- E. Frames in Masonry Walls: Size to suit masonry coursing with head member 4 inches high to fill opening without cutting masonry units.

2.04 FINISHES

- A. Primer: Rust-inhibiting, complying with ANSI/SDI A250.10, door manufacturer's standard.
- B. Bituminous Coating: Cold-applied asphalt mastic, compounded for 15 mil, 0.015 inch dry film thickness (DFT) per coat; provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.

2.05 ACCESSORIES

- A. Removable Stops: Rolled steel bar, shape as indicated on drawings, mitered or butted corners; prepared for countersink style tamper proof screws.
- B. Grout for Frames: Mortar grout complying with ASTM C476 with maximum slump of 4 inches as measured in accordance with ASTM C143/C143M for hand troweling in place; plaster grout and thinner pumpable grout are prohibited.
- C. Silencers: Resilient rubber, fitted into drilled hole; provide three on strike side of single door, three on center mullion of pairs, and two on head of pairs without center mullions.
- D. Temporary Frame Spreaders: Provide for factory- or shop-assembled frames.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- C. Verify that finished walls are in plane to ensure proper door alignment.

3.02 PREPARATION

- A. Coat inside of frames to be installed in masonry or to be grouted, with bituminous coating, prior to installation.

3.03 INSTALLATION

- A. Install doors and frames in accordance with manufacturer's instructions and related requirements of specified door and frame standards or custom guidelines indicated.
- B. Coordinate frame anchor placement with wall construction.
- C. Grout frames in masonry construction, using hand trowel methods; brace frames so that pressure of grout before setting will not deform frames.
- D. Install door hardware as specified in Section 08 7100.
- E. Coordinate installation of electrical connections to electrical hardware items.

3.04 ADJUSTING

- A. Adjust for smooth and balanced door movement.

3.05 SCHEDULE

- A. Refer to Door and Frame Schedule on the drawings.

END OF SECTION

This page intentionally left blank

**SECTION 08 1416
FLUSH WOOD DOORS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Flush wood doors; flush and flush glazed configuration; fire-rated and non-rated.
- B. **NOTE:** On doors receiving exit devices no universal preps are allowed and the doors shall be prepared specifically for the exit device functions as scheduled.

1.02 RELATED REQUIREMENTS

- A. Section 08 1113 - Hollow Metal Frames.
- B. Section 08 7100 - Door Hardware.
- C. Section 08 8000 - Glazing.

1.03 REFERENCE STANDARDS

- A. AWI (QCP) - Quality Certification Program; Current Edition.
- B. AWI/AWMAC/WI (AWS) - Architectural Woodwork Standards, 2nd Edition; 2014, with Errata (2016).
- C. AWMAC/WI (NAAWS) - North American Architectural Woodwork Standards; 2021, with Errata.
- D. NFPA 80 - Standard for Fire Doors and Other Opening Protectives; 2025, with Amendment (2024).
- E. UL 10C - Standard for Positive Pressure Fire Tests of Door Assemblies; Current Edition, Including All Revisions.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Indicate door core materials and construction; veneer species, type and characteristics.
- C. Shop Drawings: Show doors, elevations, sizes, types, swings, undercuts, beveling, blocking for hardware, factory machining, factory finishing, cutouts for glazing and other details.
 - 1. Provide information as required by AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS).
 - 2. **NOTE:** On doors receiving exit devices no universal preps are allowed and the doors shall be prepared specifically for the exit device functions as scheduled.
- D. Samples: Submit two samples of door veneer, 6 x 6 inch in size illustrating wood grain, stain color, and sheen.
- E. Test Reports: Show compliance with specified requirements for the following:
 - 1. Fire ratings for fire doors
- F. Warranty, executed in Owner's name.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section, with not less than three years of documented experience.
 - 1. Accredited participant in the specified certification program prior to the commencement of fabrication and throughout the duration of the project.
- B. Installer Qualifications: Company specializing in performing work of the type specified in this section, with not less than three years of documented experience.
- C. Woodwork Quality Assurance Program:
 - 1. Comply with AWI (QCP) woodwork association quality assurance service/program in accordance with requirements for work specified in this section; www.awiqcp.org/#sle.
 - 2. Provide labels indicating that the installed work complies with AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS) requirements for grade or grades specified.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Package, deliver and store doors in accordance with specified quality standard.
- B. Accept doors on site in manufacturer's packaging, and inspect for damage.
- C. Protect doors with resilient packaging sealed with heat shrunk plastic; do not store in damp or wet areas or areas where sunlight might bleach veneer; seal top and bottom edges with tinted sealer if stored more than one week, and break seal on site to permit ventilation.

1.07 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Wood Veneer Faced Doors:
 - 1. Eggers Industries: www.eggersindustries.com/#sle.
 - 2. Graham Wood Doors: www.grahamdoors.com/#sle.
 - 3. VT Industries, Inc; www.vtindustries.com.
 - 4. Weyerhaeuser; www.weyerhaeuser.com
 - 5. Substitutions: See Section 01 6000 - Product Requirements.

2.02 DOORS AND PANELS

- A. Doors: See drawings for locations and additional requirements.
 - 1. Quality Standard: Premium Grade, Extra Heavy Duty performance, in accordance with AWI/AWMAC/WI (AWS) or AWMAC/WI (NAAWS), unless noted otherwise.
 - 2. Wood Veneer Faced Doors: 5-ply or 7-ply unless otherwise indicated.
- B. Interior Doors: 1-3/4 inches thick unless otherwise indicated; flush construction.
 - 1. Provide solid core doors at each location.
 - 2. Fire Rated Doors: Tested to ratings indicated on drawings in accordance with UL 10C - Positive Pressure; Underwriters Laboratories Inc (UL) or Intertek/Warnock Hersey (WHI) labeled without any visible seals when door is open.
 - 3. Wood veneer facing with factory transparent finish as indicated on drawings.

2.03 DOOR AND PANEL CORES

- A. Non-Rated Solid Core and 20 Minute Rated Doors: Type particleboard core (PC), plies and faces as indicated.

2.04 DOOR FACINGS

- A. Veneer Facing for Transparent Finish: Red oak, veneer grade in accordance with quality standard indicated, plain sliced (flat cut), with book match between leaves of veneer, running match of spliced veneer leaves assembled on door or panel face; wood grain to run horizontally.

2.05 DOOR CONSTRUCTION

- A. Fabricate doors in accordance with door quality standard specified.
- B. Cores Constructed with stiles and rails:
- C. Glazed Openings: Non-removable stops on non-secure side; sizes and configurations as indicated on drawings.
- D. Factory machine doors for hardware other than surface-mounted hardware, in accordance with hardware requirements and dimensions.
- E. Factory fit doors for frame opening dimensions identified on shop drawings, with edge clearances in accordance with specified quality standard.
- F. Provide edge clearances in accordance with the quality standard specified.

2.06 FINISHES - WOOD VENEER DOORS

- A. Factory finish doors in accordance with approved sample.

2.07 ACCESSORIES

- A. Hollow Metal Door Frames: See Section 08 1113.
- B. Glazing: See Section 08 8000.
- C. Glazing Stops: Wood with metal clips for rated doors, butted corners; prepared for countersink style tamper proof screws.
- D. Door Hardware: See Section 08 7100.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify existing conditions before starting work.
- B. Verify that opening sizes and tolerances are acceptable.
- C. Do not install doors in frame openings that are not plumb or are out-of-tolerance for size or alignment.

3.02 INSTALLATION

- A. Install doors in accordance with manufacturer's instructions and specified quality standard.
 - 1. Install fire-rated doors in accordance with NFPA 80 requirements.
- B. Factory-Finished Doors: Do not field cut or trim; if fit or clearance is not correct, replace door.
- C. Use machine tools to cut or drill for hardware.
- D. Coordinate installation of doors with installation of frames and hardware.
- E. Coordinate installation of glazing.

3.03 TOLERANCES

- A. Comply with specified quality standard for fit and clearance tolerances.
- B. Comply with specified quality standard for telegraphing, warp, and squareness.

3.04 ADJUSTING

- A. Adjust doors for smooth and balanced door movement.
- B. Adjust closers for full closure.

END OF SECTION

This page intentionally left blank

**SECTION 08 3100
ACCESS DOORS AND PANELS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Floor mounted access door and frame units, interior.

1.02 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Shop Drawings: Indicate exact position of each access door and/or panel unit.
- C. Manufacturer's Installation Instructions: Indicate installation requirements.

1.03 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

PART 2 PRODUCTS

2.01 FLOOR MOUNTED ACCESS UNITS

- A. Manufacturers:
 - 1. Best Access Doors; STEEL FLOOR ACCESS DOOR: www.bestaccessdoors.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.
- B. Floor Mounted Access Units: Factory fabricated, fully assembled units with corner joints welded, filled, and ground flush; square and without rack or warp; coordinate requirements with type of installation assembly being used for each unit.
 - 1. Size: As indicated on drawings.
 - 2. Hardware: Steel, hot-dipped galvanized.
 - a. Hinges: Removable pin.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that rough openings are correctly sized and located.
- B. Begin installation only after substrates have been properly prepared, and if the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.02 PREPARATION

- A. Clean surfaces thoroughly prior to proceeding with this work.
- B. Prepare surfaces using methods recommended by manufacturer for applicable substrates in accordance with project conditions.

3.03 INSTALLATION

- A. Install units in accordance with manufacturer's instructions.
- B. Install frames plumb and level in openings, and secure units rigidly in place.
- C. Position units to provide convenient access to concealed equipment when necessary.

END OF SECTION

This page intentionally left blank

**SECTION 08 5400
COMPOSITE WINDOWS**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Factory fabricated composite windows with fixed sash.
- B. Insect screens.

1.02 RELATED REQUIREMENTS

- A. Section 07 9200 - Joint Sealants: Sealing joints between frames and adjacent construction.
- B. Section 08 8000 - Glazing.

1.03 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide component dimensions, anchorage and fasteners, glass, internal drainage details, and _____.
- C. Submit two samples ____ by ____ inches in size illustrating window frame section, mullion section, screen and frame, factory finished surfaces, glazing, infill panels, glazing materials, and _____.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Protect finished surfaces with wrapping. Do not use adhesive papers or sprayed coatings that bond when exposed to sunlight or weather.
- B. Jig, brace, and box the window frame assemblies for transport to minimize flexing of members or joints.

1.05 FIELD CONDITIONS

- A. Do not install sealants when ambient temperature is less than 40 degrees F.
- B. Maintain this minimum temperature during and after installation of sealants.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Composite Windows:
 - 1. Andersen Windows, Inc; 100 Series Casement Window:
www.andersenwindows.com/#sle.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 COMPOSITE WINDOW UNITS

- A. Composite Windows: Hollow, extruded composite material consisting of 40 percent wood fiber and 60 percent thermoplastic polymer by weight; factory fabricated; with vision glass, related flashings, anchorage and attachment devices.
 - 1. Interior Color: White.
 - 2. Exterior Color: As selected by Architect from manufacturer's standard line.
 - 3. Frame Depth: 3-1/4 inch, minimum.
 - 4. Frame Joining System: Attachment system for horizontal and vertical multiple window frames in compliance with designated project requirements.
 - a. Joining Strip: Kerfed and reinforced fiberglass strip, 3-11/64 inch wide by 1/2 inch thick for applying interior and exterior vinyl trim, end plugs, flange and gusset gasket, and galvanized steel gusset plates.
 - b. Vinyl trim color to match exposed frame colors.
 - c. Fasteners: Corrosion resistant screws as recommended by manufacturer for required applications.
 - 5. Glass Stops: Same material and color as frame, sloped for wash, factory applied.

2.03 COMPONENTS

- A. Frames: ____ inch wide by ____ inch deep profile; flush glass stops of screw fastened type.
 - 1. Type: Nailing flange (for new windows).
 - 2. Frame Corners: Mitered and joined with nylon corner locks.
- B. Fasteners: Stainless steel.

2.04 GLASS AND GLAZING MATERIALS

- A. Glass and Glazing Materials: See Section 08 8000 for types as indicated.

2.05 FABRICATION

- A. Factory fabricate framing, mullions and sash members with rigid corners and joints. Supplement frame sections with internal reinforcement where required for structural rigidity.
- B. Form sills and stools in one piece. Slope sills for wash.
- C. Fabricate components with minimum clearances and shim spacing around perimeter of window assembly, and allowing for installation and dynamic movement of perimeter seal.
- D. Arrange fasteners to be concealed from view.
- E. Permit internal drainage weep holes and channels to migrate moisture to exterior. Provide internal drainage of glazing spaces to exterior through weep holes.
- F. Factory glaze window units.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install composite window units in accordance with manufacturer's instructions.
- B. Attach window frame and shims to perimeter of opening to accommodate construction tolerances and other irregularities.
- C. Align window plumb and level, free of warp or twist. Maintain dimensional tolerances and alignment with adjacent work.

3.02 TOLERANCES

- A. Maximum Variation from Level or Plumb: 1/16 inch per 3 ft or 1/2 inch per 100 ft, non-cumulative, whichever is less.

3.03 CLEANING

- A. Remove protective material from pre-finished surfaces.
- B. Wash surfaces by method recommended and acceptable to window manufacturer; rinse and wipe surfaces clean.
- C. Remove excess glazing sealant by moderate use of mineral spirits or other solvent acceptable to sealant manufacturer.

END OF SECTION

**SECTION 08 7100
DOOR HARDWARE**

PART 1 GENERAL

1.01 REFERENCE STANDARDS

- A. ANSI/SDI A250.8 - Specifications for Standard Steel Doors and Frames (SDI-100); 2023.
- B. BHMA A156.1 - Standard for Butts and Hinges; 2025.
- C. BHMA A156.2 - Bored and Preamsembled Locks and Latches; 2022.
- D. BHMA A156.3 - Exit Devices; 2025.
- E. BHMA A156.4 - Door Closers and Pivots; 2024.
- F. BHMA A156.5 - Cylinders and Input Devices for Locks; 2020.
- G. BHMA A156.19 - Power Assist and Low Energy Power Operated Swinging Doors; 2019.
- H. BHMA A156.26 - Standard for Continuous Hinges; 2025.
- I. BHMA A156.28 - Standard for Recommended Practices for Mechanical Keying Systems; 2023.
- J. BHMA A156.31 - Electric Strikes and Frame Mounted Actuators; 2024.
- K. ISO 9000 - Quality Management — Fundamentals and Vocabulary; 2026.
- L. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- M. NFPA 80 - Standard for Fire Doors and Other Opening Protectives; 2025, with Amendment (2024).
- N. NFPA 101 - Life Safety Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- O. NFPA 105 - Standard for Smoke Door Assemblies and Other Opening Protectives; 2025.
- P. NFPA 252 - Standard Methods of Fire Tests of Door Assemblies; 2022.
- Q. UL 10B - Standard for Fire Tests of Door Assemblies; Current Edition, Including All Revisions.
- R. UL 10C - Standard for Positive Pressure Fire Tests of Door Assemblies; Current Edition, Including All Revisions.
- S. UL 305 - Standard for Panic Hardware; Current Edition, Including All Revisions.
- T. UL 1784 - Standard for Air Leakage Tests of Door Assemblies and Other Opening Protectives; Current Edition, Including All Revisions.
- U. WDMA I.S. 1A - Interior Architectural Wood Flush Doors; 2021, with Errata (2022).

1.02 SUMMARY

- A. Section includes:
 - 1. Mechanical door hardware
- B. Section excludes:
 - 1. Windows
 - 2. Cabinets (casework), including locks in cabinets
 - 3. Signage
 - 4. Toilet accessories
 - 5. Overhead doors
- C. Related Sections:
 - 1. Division 01 "General Requirements" sections for Allowances, Alternates, Owner Furnished Contractor Installed, Project Management and Coordination.
 - 2. Division 06 Section "Rough Carpentry"
 - 3. Division 06 Section "Finish Carpentry"

4. Division 07 Section "Joint Sealants" for sealant requirements applicable to threshold installation specified in this section.
5. Division 08 Sections:
 - a. "Metal Doors and Frames"
 - b. "Flush Wood Doors"
 - c. "Stile and Rail Wood Doors"
 - d. "Interior Aluminum Doors and Frames"
 - e. "Aluminum-Framed Entrances and Storefronts"
 - f. "Stainless Steel Doors and Frames"
 - g. "Special Function Doors"
 - h. "Entrances"
6. Division 26 "Electrical" sections for connections to electrical power system and for low-voltage wiring.
7. Division 28 "Electronic Safety and Security" sections for coordination with other components of electronic access control system and fire alarm system.

1.03 REFERENCES

- A. UL LLC
 1. UL 10B - Fire Test of Door Assemblies
 2. UL 10C - Positive Pressure Test of Fire Door Assemblies
 3. UL 1784 - Air Leakage Tests of Door Assemblies
 4. UL 305 - Panic Hardware
- B. DHI - Door and Hardware Institute
 1. Sequence and Format for the Hardware Schedule
 2. Recommended Locations for Builders Hardware
 3. Keying Systems and Nomenclature
 4. Installation Guide for Doors and Hardware
- C. NFPA – National Fire Protection Association
 1. NFPA 70 – National Electric Code
 2. NFPA 80 – Standard for Fire Doors and Other Opening Protectives
 3. NFPA 101 – Life Safety Code
 4. NFPA 105 – Smoke and Draft Control Door Assemblies
 5. NFPA 252 – Fire Tests of Door Assemblies
- D. ANSI - American National Standards Institute
 1. ANSI A117.1 – 2017 Edition – Accessible and Usable Buildings and Facilities
 2. ANSI/BHMA A156.1 - A156.29, and ANSI/BHMA A156.31 - Standards for Hardware and Specialties
 3. ANSI/BHMA A156.28 - Recommended Practices for Keying Systems
 4. ANSI/WDMA I.S. 1A - Interior Architectural Wood Flush Doors
 5. ANSI/SDI A250.8 - Standard Steel Doors and Frames

1.04 SUBMITTALS

- A. General:
 1. Submit in accordance with Conditions of Contract and Division 01 Submittal Procedures.
 2. Prior to forwarding submittal:
 - a. Review drawings and Sections from related trades to verify compatibility with specified hardware.
 - b. Highlight, encircle, or otherwise specifically identify on submittals: deviations from Contract Documents, issues of incompatibility or other issues which may detrimentally affect the Work.
- B. Action Submittals:

1. Product Data: Submit technical product data for each item of door hardware, installation instructions, maintenance of operating parts and finish, and other information necessary to show compliance with requirements.
 2. Door Hardware Schedule:
 - a. Submit concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate fabrication of other work critical in Project construction schedule.
 - b. Submit with hardware sets in vertical format as illustrated by Sequence of Format for the Hardware Schedule published by DHI.
 - c. Indicate complete designations of each item required for each opening, include:
 - 1) Door Index: door number, heading number, and Architect's hardware set number.
 - 2) Quantity, type, style, function, size, and finish of each hardware item.
 - 3) Name and manufacturer of each item.
 - 4) Fastenings and other pertinent information.
 - 5) Location of each hardware set cross-referenced to indications on Drawings.
 - 6) Explanation of all abbreviations, symbols, and codes contained in schedule.
 - 7) Mounting locations for hardware.
 - 8) Door and frame sizes and materials.
 - 9) Degree of door swing and handing.
 - 10) Operational Description of openings with electrified hardware covering egress, ingress (access), and fire/smoke alarm connections.
 3. Key Schedule:
 - a. After Keying Conference, provide keying schedule that includes levels of keying, explanations of key system's function, key symbols used, and door numbers controlled.
 - b. Use ANSI/BHMA A156.28 "Recommended Practices for Keying Systems" as guideline for nomenclature, definitions, and approach for selecting optimal keying system.
 - c. Provide 3 copies of keying schedule for review prepared and detailed in accordance with referenced DHI publication. Include schematic keying diagram and index each key to unique door designations.
 - d. Index keying schedule by door number, keyset, hardware heading number, cross keying instructions, and special key stamping instructions.
 - e. Provide one complete bitting list of key cuts and one key system schematic illustrating system usage and expansion. Forward bitting list, key cuts and key system schematic directly to Owner, by means as directed by Owner.
 - f. Prepare key schedule by or under supervision of supplier, detailing Owner's final keying instructions for locks.
- C. Informational Submittals:
1. Provide Qualification Data for Supplier, Installer and Architectural Hardware Consultant.
 2. Provide Product Data:
 - a. Certify that door hardware approved for use on types and sizes of labeled fire-rated doors complies with listed fire-rated door assemblies.
 - b. Include warranties for specified door hardware.
- D. Closeout Submittals:
1. Operations and Maintenance Data: Provide in accordance with Division 01 and include:
 - a. Complete information on care, maintenance, and adjustment; data on repair and replacement parts, and information on preservation of finishes.
 - b. Catalog pages for each product.
 - c. Final approved hardware schedule edited to reflect conditions as installed.
 - d. Final keying schedule

- e. Copy of warranties including appropriate reference numbers for manufacturers to identify project.

1.05 QUALITY ASSURANCE

- A. Qualifications and Responsibilities:
 - 1. Supplier: Recognized architectural hardware supplier with a minimum of 5 years documented experience supplying both mechanical and electromechanical door hardware similar in quantity, type, and quality to that indicated for this Project. Supplier to be recognized as a factory direct distributor by the manufacturer of the primary materials with a warehousing facility in the Project's vicinity. Supplier to have on staff, a certified Architectural Hardware Consultant (AHC) or Door Hardware Consultant (DHC) available to Owner, Architect, and Contractor, at reasonable times during the Work for consultation.
 - 2. Installer: Qualified tradesperson skilled in the application of commercial grade hardware with experience installing door hardware similar in quantity, type, and quality as indicated for this Project.
 - 3. Single Source Responsibility: Obtain each type of door hardware from single manufacturer.
- B. Pre-Installation Meetings
 - 1. Keying Conference
 - a. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including:
 - 1) Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
 - 2) Preliminary key system schematic diagram.
 - 3) Requirements for key control system.
 - 4) Requirements for access control.
 - 5) Address for delivery of keys.
 - 2. Pre-installation Conference
 - a. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 - b. Inspect and discuss preparatory work performed by other trades.
 - c. Inspect and discuss electrical roughing-in for electrified door hardware.
 - d. Review sequence of operation for each type of electrified door hardware.
 - e. Review required testing, inspecting, and certifying procedures.
 - f. Review questions or concerns related to proper installation and adjustment of door hardware.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for hardware delivered to Project site. Promptly replace products damaged during shipping
- B. Tag each item or package separately with identification coordinated with final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package. Deliver each article of hardware in manufacturer's original packaging.
- C. Maintain manufacturer-recommended environmental conditions throughout storage and installation periods.
- D. Provide secure lock-up for door hardware delivered to Project. Control handling and installation of hardware items so that completion of Work will not be delayed by hardware losses both before and after installation.
- E. Handle hardware in manner to avoid damage, marring, or scratching. Correct, replace or repair products damaged during Work. Protect products against malfunction due to paint, solvent, cleanser, or any chemical agent.

1.07 COORDINATION

- A. Coordinate layout and installation of floor-recessed door hardware with floor construction. Cast anchoring inserts into concrete.
- B. Installation Templates: Distribute for doors, frames, and other work specified to be factory or shop prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- C. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- D. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

1.08 WARRANTY

- A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within published warranty period.
 - 1. Warranty does not cover damage or faulty operation due to improper installation, improper use or abuse.
 - 2. Warranty Period: Beginning from date of Substantial Completion, for durations indicated in manufacturer's published listings.

1.09 MAINTENANCE

- A. Turn over unused materials to Owner for maintenance purposes.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Approval of alternate manufacturers and/or products other than those listed as "Scheduled Manufacturer" or "Acceptable Manufacturers" in the individual article for the product category are only to be considered by official substitution request in accordance with section 01 25 00.
- B. Approval of products from manufacturers indicated in "Acceptable Manufacturers" is contingent upon those products providing all functions and features and meeting all requirements of scheduled manufacturer's product.
- C. Where specified hardware is not adaptable to finished shape or size of members requiring hardware, furnish suitable types having same operation and quality as type specified, subject to Architect's approval.

2.02 MATERIALS

- A. Fabrication
 - 1. Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. provide screws according to manufacturer's recognized installation standards for application intended.
 - 2. Finish exposed screws to match hardware finish, or, if exposed in surfaces of other work, to match finish of this other work including prepared for paint surfaces to receive painted finish.
 - 3. Provide concealed fasteners wherever possible for hardware units exposed when door is closed. Coordinate with "Metal Doors and Frames", "Flush Wood Doors", "Stile and Rail Wood Doors" to ensure proper reinforcements. Advise the Architect where visible fasteners, such as thru bolts, are required.
- B. Provide screws, bolts, expansion shields, drop plates and other devices necessary for hardware installation.
 - 1. Where fasteners are exposed to view: Finish to match adjacent door hardware material.
- C. Cable and Connectors:
 - 1. Where scheduled in the hardware sets, provide each item of electrified hardware and wire harnesses with number and gage of wires enough to accommodate electric function of specified hardware.

2. Provide Molex connectors that plug directly into connectors from harnesses, electric locking and power transfer devices.
3. Provide through-door wire harness for each electrified locking device installed in a door and wire harness for each electrified hinge, electrified continuous hinge, electrified pivot, and electric power transfer for connection to power supplies.

2.03 HINGES

- A. Manufacturers and Products:
 1. Scheduled Manufacturer and Product:
 - a. Ives 5BB series
 2. Acceptable Manufacturers and Products:
 - a. McKinney TB series
 - b. Best FBB series
- B. Requirements:
 1. Provide hinges conforming to ANSI/BHMA A156.1.
 2. Provide five knuckle, ball bearing hinges.
 3. 1-3/4 inch thick doors, up to and including 36 inches wide:
 - a. Exterior: Standard weight, bronze or stainless steel, 4-1/2 inches high
 - b. Interior: Standard weight, steel, 4-1/2 inches high
 4. 1-3/4 inch thick doors over 36 inches wide:
 - a. Exterior: Heavy weight, bronze/stainless steel, 5 inches high
 - b. Interior: Heavy weight, steel, 5 inches high
 5. 2 inches or thicker doors:
 - a. Exterior: Heavy weight, bronze or stainless steel, 5 inches high
 - b. Interior: Heavy weight, steel, 5 inches high
 6. Adjust hinge width for door, frame, and wall conditions to allow proper degree of opening.
 7. Provide three hinges per door leaf for doors 90 inches or less in height, and one additional hinge for each 30 inches of additional door height.
 8. Where new hinges are specified for existing doors or existing frames, provide new hinges of identical size to hinge preparation present in existing door or existing frame.
 9. Hinge Pins: Except as otherwise indicated, provide hinge pins as follows:
 - a. Steel Hinges: Steel pins
 - b. Non-Ferrous Hinges: Stainless steel pins
 - c. Out-Swinging Exterior Doors: Non-removable pins
 - d. Out-Swinging Interior Lockable Doors: Non-removable pins
 - e. Interior Non-lockable Doors: Non-rising pins
 10. Provide hinges with electrified options as scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware. Locate electric hinge at second hinge from bottom or nearest to electrified locking component. Provide mortar guard for each electrified hinge specified.

2.04 CYLINDRICAL LOCKS – GRADE 1

- A. Manufacturers and Products:
 1. Scheduled Manufacturer and Product:
 - a. Schlage ND series
 2. Acceptable Manufacturers and Products:
 - a. Marks 195 Series
- B. Requirements:
 1. Provide cylindrical locks conforming to ANSI/BHMA A156.2 Series 4000, Grade 1, and UL Listed for 3-hour fire doors.
 2. Indicators: Where specified, provide escutcheon with lock status indicator window on top of lockset rose:
 - a. Escutcheon height (including rose) 6.05 inches high by 3.68 inches wide.

- b. Indicator window measuring a minimum 3.52-inch by .60 inch with 1.92 square-inches of front facing viewing area and 180-degree visibility with a total of .236 square-inches of total viewable area.
 - c. Provide snap-in serviceable window to prevent tampering. Lock must function if indicator is compromised.
 - d. Provide messages color-coded with full text and symbol, as scheduled, for easy visibility.
 - e. Unlocked and Unoccupied message will display on white background, and Locked and Occupied message will display on red background.
- 3. Cylinders: Refer to "KEYING" article, herein.
 - 4. Provide locks with standard 2-3/4 inches backset, unless noted otherwise, with 1/2-inch latch throw. Provide proper latch throw for UL listing at pairs.
 - 5. Provide locksets with separate anti-rotation thru-bolts, and no exposed screws.
 - 6. Provide independently operating levers with two external return spring cassettes mounted under roses to prevent lever sag.
 - 7. Provide standard ASA strikes unless extended lip strikes are necessary to protect trim.
 - 8. Provide electrified options as scheduled in the hardware sets.
 - 9. Lever Trim: Solid cast levers without plastic inserts and wrought roses on both sides.

2.05 CYLINDERS

- A. Manufacturers:
 - 1. Scheduled Manufacturer and Product:
 - a. Schlage (SC4)
 - 2. Acceptable Manufacturers and Products:
 - a. Substitutions by Architect approval only
- B. Requirements:
 - 1. Provide cylinders/cores to match Owner's existing key system, compliant with ANSI/BHMA A156.5; latest revision; cylinder face finished to match lockset, manufacturer's series as indicated. Refer to "KEYING" article, herein.

2.06 KEYING

- A. Scheduled System:
 - 1. Existing factory registered system:
 - a. Provide cylinders/cores keyed into Owner's existing factory registered keying system. Comply with guidelines in ANSI/BHMA A156.28, incorporating decisions made at keying conference.
- B. Requirements:
 - 1. Construction Keying:
 - a. Temporary Construction Cylinder Keying.
 - 1) Provide construction cores that permit voiding construction keys without cylinder removal, furnished in accordance with the following requirements.
 - (a) Split Key or Lost Ball Construction Keying System.
 - (b) 3 construction control keys, and extractor tools or keys as required to void construction keying.
 - (c) 12 construction change (day) keys.
 - 2) Owner or Owner's Representative will void operation of temporary construction keys.
 - 2. Permanent Keying:
 - a. Provide permanent cylinders/cores keyed by the manufacturer according to the following key system.
 - 1) Master Keying system as directed by the Owner.
 - b. Forward biting list and keys separately from cylinders, by means as directed by Owner. Failure to comply with forwarding requirements will be cause for replacement of cylinders/cores involved at no additional cost to Owner.

- c. Provide keys with the following features:
 - 1) Material: Nickel silver; minimum thickness of .107-inch (2.3mm)
- d. Identification:
 - 1) Mark permanent cylinders/cores and keys with applicable blind code for identification. Do not provide blind code marks with actual key cuts.
 - 2) Identification stamping provisions must be approved by the Architect and Owner.
 - 3) Stamp cylinders/cores and keys with Owner's unique key system facility code as established by the manufacturer; key symbol and embossed or stamped with "DO NOT DUPLICATE" along with the "PATENTED" or patent number to enforce the patent protection.
 - 4) Failure to comply with stamping requirements will be cause for replacement of keys involved at no additional cost to Owner.
 - 5) Forward permanent cylinders/cores to Owner, separately from keys, by means as directed by Owner.
- e. Quantity: Furnish in the following quantities.
 - 1) Master Keys: 6.
 - 2) Change (Day) Keys: 3 per cylinder/core that is keyed differently
 - 3) Key Blanks: Quantity as determined in the keying meeting.

2.07 DOOR CLOSERS

- A. Manufacturers and Products:
 - 1. Scheduled Manufacturer and Product:
 - a. LCN 4050A series
 - 2. Acceptable Manufacturers and Products:
 - a. Substitutions by Architect approval only
- B. Requirements:
 - 1. Provide door closers conforming to ANSI/BHMA A156.4 Grade 1 requirements by BHMA certified independent testing laboratory. ISO 9000 certify closers. Stamp units with date of manufacture code.
 - 2. Provide door closers with fully hydraulic, full rack and pinion action with cast aluminum cylinder.
 - 3. Closer Body: 1-1/2-inch 1.5 inch diameter with 11/16-inch (0.67 inch) diameter heat-treated pinion journal and full complement bearings.
 - 4. Hydraulic Fluid: Fireproof, passing requirements of UL 10C, and all weather requiring no seasonal closer adjustment for temperatures ranging from 120 degrees Fahrenheit to -30 degrees Fahrenheit.
 - 5. Spring Power: Continuously adjustable over full range of closer sizes, and providing reduced opening force as required by accessibility codes and standards.
 - 6. Hydraulic Regulation: By tamper-proof, non-critical valves, with separate adjustment for latch speed, general speed, and back check.
 - 7. Pressure Relief Valve (PRV) Technology: Not permitted.
 - 8. Provide stick on templates, special templates, drop plates, mounting brackets, or adapters for arms as required for details, overhead stops, and other door hardware items interfering with closer mounting.

2.08 DOOR TRIM

- A. Manufacturers:
 - 1. Scheduled Manufacturer:
 - a. Ives
 - 2. Acceptable Manufacturers:
 - a. Trimco
 - b. Rockwood
- B. Requirements:

1. Provide push plates, push bars, pull plates, pulls, and hands-free reversible door pulls with diameter and length as scheduled.

2.09 DOOR STOPS AND HOLDERS

- A. Manufacturers:
 1. Scheduled Manufacturer:
 - a. Ives
 2. Acceptable Manufacturers:
 - a. Trimco
 - b. Rockwood
- B. Provide door stops at each door leaf:
 1. Provide wall stops wherever possible. Provide concave type where lockset has a push button or thumbturn.
 2. Where a wall stop cannot be used, provide universal floor stops.
 3. Where wall or floor stop cannot be used, provide overhead stop.
 4. Provide roller bumper where doors open into each other and overhead stop cannot be used.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Prior to installation of hardware, examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance. Verify doors, frames, and walls have been properly reinforced for hardware installation.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Submit a list of deficiencies in writing and proceed with installation only after unsatisfactory conditions have been corrected.

3.02 INSTALLATION

- A. Mount door hardware units at heights to comply with the following, unless otherwise indicated or required to comply with governing regulations.
 1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
 2. Custom Steel Doors and Frames: HMMA 831.
 3. Interior Architectural Wood Flush Doors: ANSI/WDMA I.S. 1A
 4. Installation Guide for Doors and Hardware: DHI TDH-007-20
- B. Install door hardware in accordance with NFPA 80, NFPA 101 and provide post-install inspection, testing as specified in section 1.03.E unless otherwise required to comply with governing regulations.
- C. Install each hardware item in compliance with manufacturer's instructions and recommendations, using only fasteners provided by manufacturer.
- D. Do not install surface mounted items until finishes have been completed on substrate. Protect all installed hardware during painting.
- E. Set units level, plumb and true to line and location. Adjust and reinforce attachment substrate as necessary for proper installation and operation.
- F. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- G. Install operating parts so they move freely and smoothly without binding, sticking, or excessive clearance.
- H. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than quantity recommended by manufacturer for application indicated.

- I. Lock Cylinders:
 - 1. Install construction cores to secure building and areas during construction period.
 - 2. Replace construction cores with permanent cores as indicated in keying section.
 - 3. Furnish permanent cores to Owner for installation.
- J. Wiring: Coordinate with Division 26, ELECTRICAL and Division 28 ELECTRONIC SAFETY AND SECURITY sections for:
 - 1. Conduit, junction boxes and wire pulls.
 - 2. Connections to and from power supplies to electrified hardware.
 - 3. Connections to fire/smoke alarm system and smoke evacuation system.
 - 4. Connection of wire to door position switches and wire runs to central room or area, as directed by Architect.
 - 5. Connections to panel interface modules, controllers, and gateways.
 - 6. Testing and labeling wires with Architect's opening number.
- K. Continuous Hinges: Re-locate the door and frame fire rating labels where they will remain visible so that the hinge does not cover the label once installed.
- L. Door Closers & Auto Operators: Mount closers/operators on room side of corridor doors, inside of exterior doors, and stair side of stairway doors from corridors. Mount closers/operators so they are not visible in corridors, lobbies and other public spaces unless approved by Architect.
- M. Overhead Stops/Holders: Mount overhead stops/holders on room side of corridor doors, inside of exterior doors, and stair side of stairway doors.
- N. Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings or in equipment room, or alternate location as directed by Architect.
- O. Thresholds:
 - 1. Set thresholds in full bed of sealant complying with requirements specified in Division 07 Section "Joint Sealants."
 - 2. Aluminum thresholds to be cut-in, and scribed around mullions, frame members, and stops. Do not butt to thresholds. Provide a continuous surface across full width of opening from jamb to jamb.
 - 3. Where aluminum panic-type (rabbeted) thresholds with neoprene inserts are specified, undercut doors as required to properly mate with seal in threshold.
- P. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they may impede traffic or present tripping hazard.
- Q. Perimeter Gasketing:
 - 1. Apply to head and jamb, forming seal between door and frame.
 - 2. Install gasketing in a manner eliminating need to cut any seal to install surface mounted hardware. Install compatible mounting bracket for surface mounted hardware unless minimum 1/4 inch thick solid aluminum seals are provided for mounting of surface applied hardware.
- R. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
- S. Door Bottoms and Sweeps: Apply to bottom of door, forming seal with threshold when door is closed.

3.03 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

- B. Occupancy Adjustment: Approximately three to six months after date of Substantial Completion, examine and readjust each item of door hardware, including adjusting operating forces, as necessary to ensure function of doors and door hardware.

3.04 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items per manufacturer's instructions to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.05 DOOR HARDWARE SCHEDULE

- A. The intent of the hardware specification is to specify the hardware for interior and exterior doors, and to establish a type, continuity, and standard of quality. However, it is the door hardware supplier's responsibility to thoroughly review existing conditions, schedules, specifications, drawings, and other Contract Documents to verify the suitability of the hardware specified.
- B. Discrepancies, conflicting hardware, and missing items are to be brought to the attention of the architect with corrections made prior to the bidding process. Omitted items not included in a hardware set should be scheduled with the appropriate additional hardware required for proper application.
- C. Hardware items are referenced in the following hardware schedule. Refer to the above specifications for special features, options, cylinders/keying, and other requirements.
- D. Hardware Sets:

Abbreviation	Name
GLY	Glynn-Johnson Corp
IVE	H.B. Ives
LCN	LCN Commercial Division
SCH	Schlage Lock Company
VON	Von Duprin
ZER	Zero International Inc

HARDWARE GROUP NO. 01

101					
-----	--	--	--	--	--

PROVIDE EACH SGL DOOR(S) WITH THE FOLLOWING:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	SET	INTERIOR HINGE	5BB1 SERIES (QTY, WEIGHT, SIZE, NRP AS REQ'D)		652	IVE
1	EA	ENTRANCE LOCK	CO-100-CY-70-KP-RHO-P6 (626 finish)		626	SCH
1	EA	SURFACE CLOSER	4050A EDA		689	LCN
1	EA	WALL STOP	WS406/407CCV		626	IVE
1	EA	GASKETING	488S @ HEAD & JAMBS		BK	ZER

END OF SECTION

This page intentionally left blank

**SECTION 08 8000
GLAZING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Insulating glass units.
- B. Glazing units.
- C. Glazing compounds.

1.02 RELATED REQUIREMENTS

- A. Section 07 2500 - Weather Barriers.
- B. Section 07 9200 - Joint Sealants: Sealants for other than glazing purposes.
- C. Section 08 1113 - Hollow Metal Frames: Glazed lites in doors and borrowed lites.
- D. Section 08 1416 - Flush Wood Doors: Glazed lites in doors.
- E. Section 08 3200 - Sliding Glass Doors: Glazing provided by door manufacturer.
- F. Section 08 4229 - Automatic Entrances: Glazing provided as part of door assembly.
- G. Section 08 4313 - Aluminum-Framed Storefronts: Glazing provided as part of storefront assembly.
- H. Section 10 2800 - Toilet, Bath, and Laundry Accessories: Mirrors.

1.03 REFERENCE STANDARDS

- A. 16 CFR 1201 - Safety Standard for Architectural Glazing Materials; Current Edition.
- B. ANSI Z97.1 - American National Standard for Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test; 2026.
- C. ASCE 7 - Minimum Design Loads and Associated Criteria for Buildings and Other Structures; Most Recent Edition Cited by Referring Code or Reference Standard.
- D. ASTM C864 - Standard Specification for Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers; 2005 (Reapproved 2026).
- E. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2018 (Reapproved 2024).
- F. ASTM C1036 - Standard Specification for Flat Glass; 2025.
- G. ASTM C1048 - Standard Specification for Heat-Strengthened and Fully Tempered Flat Glass; 2025.
- H. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2025.
- I. ASTM C1376 - Standard Specification for Pyrolytic and Vacuum Deposition Coatings on Flat Glass; 2021a.
- J. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2026a.
- K. ASTM E1300 - Standard Practice for Determining Load Resistance of Glass in Buildings; 2024.
- L. ASTM E2190 - Standard Specification for Insulating Glass Unit Performance and Evaluation; 2019.
- M. GANA (SM) - GANA Sealant Manual; 2008.
- N. ITS (DIR) - Directory of Listed Products; Current Edition.
- O. NFRC 100 - Procedure for Determining Fenestration Product U-factors; 2023.
- P. NFRC 200 - Procedure for Determining Fenestration Product Solar Heat Gain Coefficient and Visible Transmittance at Normal Incidence; 2023.
- Q. NFRC 300 - Test Method for Determining the Solar Optical Properties of Glazing Materials and Systems; 2026.

- R. UL (DIR) - Online Certifications Directory; Current Edition.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene a preinstallation meeting one week before starting work of this section; require attendance by each of the affected installers.

1.05 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data on Insulating Glass Unit, Glazing Unit, and Plastic Film Glazing Types: Provide structural, physical and environmental characteristics, size limitations, special handling and installation requirements.
- C. Product Data on Glazing Compounds and Accessories: Provide chemical, functional, and environmental characteristics, limitations, special application requirements, and identify available colors.
- D. Samples: Submit one samples 12 by 12 inch in size of glass units, showing coloration.
- E. Samples: Submit 2 inch long bead of glazing sealant, color as selected.
- F. Certificate: Certify that products of this section meet or exceed specified requirements.
- G. Warranty Documentation: Submit manufacturer warranty and ensure that forms have been completed in Owner's name and registered with manufacturer.

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified and with at least three years documented experience.

1.07 FIELD CONDITIONS

- A. Do not install glazing when ambient temperature is less than 40 degrees F.
- B. Maintain minimum ambient temperature before, during and 24 hours after installation of glazing compounds.

1.08 WARRANTY

- A. See Section 01 7800 - Closeout Submittals for additional warranty requirements.
- B. Insulating Glass Units: Provide a five (5) year manufacturer warranty to include coverage for seal failure, interpane dusting or misting, including providing products to replace failed units.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Float Glass Manufacturers:
1. Guardian Glass, LLC; _____: www.guardianglass.com/#sle.
 2. Pilkington North America Inc; _____: www.pilkington.com/na/#sle.
 3. Vitro Architectural Glass (formerly PPG Glass): www.vitroglazings.com/#sle.

2.02 PERFORMANCE REQUIREMENTS - EXTERIOR GLAZING ASSEMBLIES

- A. Provide type and thickness of exterior glazing assemblies to support assembly dead loads, and to withstand live loads caused by positive and negative wind pressure acting normal to plane of glass.
1. Design Pressure: Calculated in accordance with ASCE 7.
 2. Comply with ASTM E1300 for design load resistance of glass type, thickness, dimensions, and maximum lateral deflection of supported glass.
 3. Seismic Loads: Design and size glazing components to withstand seismic loads and sway displacement in accordance with the requirements of ASCE 7

4. Provide glass edge support system sufficiently stiff to limit the lateral deflection of supported glass edges to less than 1/175 of their lengths under specified design load.
5. Glass thicknesses listed are minimum.
- B. Weather-Resistive Barrier Seals: Provide completed assemblies that maintain continuity of building enclosure water-resistive barrier, vapor retarder, and/or air barrier.
 1. In conjunction with weather barrier related materials described in other sections, as follows:
 - a. Water-Resistive Barriers: See Section 07 2500.
 2. To maintain a continuous vapor retarder and/or air barrier throughout glazed assembly from glass pane to heel bead of glazing sealant.
- C. Thermal and Optical Performance: Provide exterior glazing products with performance properties as indicated. Performance properties are in accordance with manufacturer's published data as determined with the following procedures and/or test methods:
 1. Center of Glass U-Value: Comply with NFRC 100 using Lawrence Berkeley National Laboratory (LBNL) WINDOW 6.3 computer program.
 2. Center of Glass Solar Heat Gain Coefficient (SHGC): Comply with NFRC 200 using Lawrence Berkeley National Laboratory (LBNL) WINDOW 6.3 computer program.
 3. Solar Optical Properties: Comply with NFRC 300 test method.

2.03 GLASS MATERIALS

- A. Float Glass: Provide float glass based glazing unless otherwise indicated.
 1. Annealed Type: ASTM C1036, Type I - Transparent Flat, Class 1 - Clear, Quality - Q3.
 2. Kind HS - Heat-Strengthened Type: Complies with ASTM C1048.
 3. Thicknesses: As indicated; provide greater thickness as required for exterior glazing wind load design.

2.04 INSULATING GLASS UNITS

- A. Manufacturers:
 1. Glass: Any of the manufacturers specified for float glass.
- B. Insulating Glass Units: Types as indicated.
 1. Durability: Certified by an independent testing agency to comply with ASTM E2190.
 2. Coated Glass: Comply with requirements of ASTM C1376 for pyrolytic (hard-coat) or magnetic sputter vapor deposition (soft-coat) type coatings on flat glass; coated vision glass, Kind CV; coated overhead glass, Kind CO; or coated spandrel glass, Kind CS.
 3. Metal-Edge Spacers: Aluminum, bent and soldered corners.
 4. Spacer Color: Bronze.
 5. Edge Seal:
 - a. Dual-Sealed System: Provide polyisobutylene sealant as primary seal applied between spacer and glass panes, and silicone, polysulfide, or polyurethane sealant as secondary seal applied around perimeter.
 6. Color: Black.
 7. Purge interpane space with dry air, hermetically sealed.
 8. Capillary Tubes: Provide tubes from air space for insulating glass units without inert type gas that have a change of altitude greater than 2500 feet between point of fabrication and point of installation to permit pressure equalization of air space.
 - a. Breather Tubes: Seal or crimp breather tubes upon installation in accordance with insulating glass fabricator's requirements.
 - b. Inert gas may be installed in the field into air space in accordance with insulating glass fabricator's and installer's requirements.
- C. Type IG-1 - Insulating Glass Units: Vision glass, double glazed.
 1. Applications: Exterior glazing unless otherwise indicated.
 2. Space between lites filled with air.
 3. Outboard Lite: Annealed float glass, 1/4 inch thick, minimum.

- a. Tint: Clear.
- b. Coating: Self-cleaning type, on #1 surface.
- c. Coating: Low-E (passive type), on #2 surface.
4. Inboard Lite: Annealed float glass, 1/4 inch thick, minimum.
 - a. Tint: Clear.
5. Total Thickness: 1 inch.
6. Thermal Transmittance (U-Value), Summer - Center of Glass: .26, nominal.
7. Visible Light Transmittance (VLT): 32% to 64% percent, nominal.
8. Solar Heat Gain Coefficient (SHGC): 0.19 to 0.27, nominal.

2.05 BASIS OF DESIGN - INSULATING GLASS UNITS

- A. Basis of Design - Insulating Glass Units: Vision glazing, with low-e coating.
 1. Applications: Exterior insulating glass glazing unless otherwise indicated.
 2. Space between lites filled with argon.
 3. Total Thickness: 1 inch.
 4. Thermal Transmittance (U-Value), Summer - Center of Glass: .26, nominal.
 5. Visible Light Transmittance (VLT): 32% to 64% percent, nominal.
 6. Solar Heat Gain Coefficient (SHGC): 0.19 to 0.27, nominal.
 7. Visible Light Reflectance, Outside: 64 percent, nominal.
 8. Glazing Method: Dry glazing method, gasket glazing.
 9. Coated Glass: Comply with requirements of ASTM C1376 for pyrolytic (hard-coat) or magnetic sputter vapor deposition (soft-coat) type coatings on flat glass; coated vision glass, Kind CV; coated overhead glass, Kind CO; or coated spandrel glass, Kind CS.
 10. Spacer Color: Black.
 11. Edge Seal:
 12. Color: Black.
 13. Purge interpane space with dry air, hermetically sealed.
 14. Basis of Design - Vitro Architectural Glass (formerly PPG Glass):
www.vitroglazings.com/#sle.
 15. Outboard Lite: Annealed float glass, 1/4 inch thick, minimum.
 - a. Low-E Coating: Vitro Architectural Glass (formerly PPG Glass) Solarban 70 glass on #2 surface.
 - b. Glass: Clear.
 16. Inboard Lite: Heat-strengthened float glass, 1/4 inch thick.
 17. Other Manufacturers: Provide either the product identified as "Basis of Design" or an equivalent product of another acceptable manufacturer.
 18. Substitution Procedures: See Section 01 6000 - Product Requirements.

2.06 GLAZING COMPOUNDS

- A. Type GC-2 - Butyl Sealant: Single component; ASTM C920 Grade NS, Class 12-1/2, Uses M and A, Shore A hardness of 10 to 20; black color.
- B. Type GC-5 - Silicone Sealant: Single component; neutral curing; capable of water immersion without loss of properties; nonbleeding, nonstaining; ASTM C920 Type S, Grade NS, Class 25, Uses M, A, and G; with cured Shore A hardness range of 15 to 25; _____ color.
- C. Manufacturers:
 1. Dow Corning Corporation: www.dowcorning.com/construction/#sle. Dow Corning Corporation: www.dowcorning.com/construction/#sle.
 2. Tremco Commercial Sealants & Waterproofing; Proglaze: www.tremcosealants.com/#sle.
 3. Substitutions: See Section 01 6000 - Product Requirements.

2.07 ACCESSORIES

- A. Setting Blocks: Silicone, with 80 to 90 Shore A durometer hardness; ASTM C864 Option II. Length of 0.1 inch for each square foot of glazing or minimum 4 inch by width of glazing rabbet space minus 1/16 inch by height to suit glazing method and pane weight and area.

- B. Spacer Shims: Neoprene, 50 to 60 Shore A durometer hardness; ASTM C864 Option II. Continuous by one half the height of the glazing stop by thickness to suit application, self adhesive on one face.
- C. Glazing Tape, Back Bedding Mastic Type: Preformed, butyl-based, 100 percent solids compound with integral resilient spacer rod applicable to application indicated; 5 to 30 cured Shore A durometer hardness; coiled on release paper; black color.
 - 1. Width: As required for application.
 - 2. Thickness: As required for application.
 - 3. Spacer Rod Diameter: As required for application.
- D. Glazing Splines: Resilient silicone extruded shape to suit glazing channel retaining slot; ASTM C864 Option II; color black.
- E. Glazing Clips: Manufacturer's standard type.

PART 3 EXECUTION

3.01 VERIFICATION OF CONDITIONS

- A. Verify that openings for glazing are correctly sized and within tolerances, including those for size, squareness, and offsets at corners.
- B. Verify that surfaces of glazing channels or recesses are clean, free of obstructions that may impede moisture movement, weeps are clear, and support framing is ready to receive glazing system.
- C. Verify that sealing between joints of glass framing members has been completed effectively.

3.02 PREPARATION

- A. Clean contact surfaces with appropriate solvent and wipe dry within maximum of 24 hours before glazing. Remove coatings that are not tightly bonded to substrates.
- B. Seal porous glazing channels or recesses with substrate compatible primer or sealer.
- C. Prime surfaces scheduled to receive sealant where required for proper sealant adhesion.

3.03 INSTALLATION, GENERAL

- A. Install glazing in compliance with written instructions of glass, gaskets, and other glazing material manufacturers, unless more stringent requirements are indicated, including those in glazing referenced standards.
- B. Install glazing sealants in accordance with ASTM C1193, GANA (SM), and manufacturer's instructions.
- C. Set glass lites in proper orientation so that coatings face exterior or interior as indicated.
- D. Prevent glass from contact with any contaminating substances that may be the result of construction operations such as, and not limited to the following; weld splatter, fire-safing, plastering, mortar droppings, and paint.

3.04 INSTALLATION - DRY GLAZING METHOD (GASKET GLAZING)

- A. Application - Exterior and/or Interior Glazed: Set glazing infills from either the exterior or the interior of the building.
- B. Place setting blocks at 1/4 points with edge block no more than 6 inch from corners.
- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure on gasket to attain full contact.
- D. Install removable stops without displacing glazing gasket; exert pressure for full continuous contact.

3.05 INSTALLATION - WET/DRY GLAZING METHOD (PREFORMED TAPE AND SEALANT)

- A. Application - Exterior Glazed: Set glazing infills from the exterior of the building.

- B. Cut glazing tape to length and set against permanent stops, 3/16 inch below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- C. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- D. Place setting blocks at 1/4 points with edge block no more than 6 inch from corners.
- E. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to attain full contact at perimeter of pane or glass unit.
- F. Install removable stops, with spacer strips inserted between glazing and applied stops 1/4 inch below sight lines.
 - 1. Place glazing tape on glazing pane of unit with tape flush with sight line.
- G. Fill gap between glazing and stop with _____ type sealant to depth equal to bite of frame on glazing, but not more than 3/8 inch below sight line.
- H. Apply cap bead of _____ type sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.06 INSTALLATION - WET/DRY GLAZING METHOD (TAPE AND SEALANT)

- A. Application - Interior Glazed: Set glazing infills from the interior of the building.
- B. Cut glazing tape to length and install against permanent stops, projecting 1/16 inch above sight line.
- C. Place setting blocks at 1/4 points with edge block no more than 6 inch from corners.
- D. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- E. Install removable stops, spacer shims inserted between glazing and applied stops at 24 inch intervals, 1/4 inch below sight line.
- F. Fill gaps between pane and applied stop with _____ type sealant to depth equal to bite on glazing, to uniform and level line.
- G. Carefully trim protruding tape with knife.

3.07 CLEANING

- A. Remove excess glazing materials from finish surfaces immediately after application using solvents or cleaners recommended by manufacturers.
- B. Remove nonpermanent labels immediately after glazing installation is complete.
- C. Clean glass and adjacent surfaces after sealants are fully cured.
- D. Clean glass on both exposed surfaces not more than 4 days prior to Date of Substantial Completion in accordance with glass manufacturer's written recommendations.

3.08 PROTECTION

- A. Remove and replace glass that is damaged during construction period prior to Date of Substantial Completion.

END OF SECTION

**SECTION 09 0561
COMMON WORK RESULTS FOR FLOORING PREPARATION**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. This section applies to floors identified in contract documents that are receiving the following types of floor coverings:
 - 1. Resilient tile and sheet.
 - 2. Carpet tile.
 - 3. Cementitious underlayments and patching compounds.
- B. Removal of existing floor coverings.
- C. Preparation of existing concrete floor slabs for installation of floor coverings.
- D. Patching compound.

1.02 RELATED REQUIREMENTS

1.03 REFERENCE STANDARDS

- A. ASTM C109/C109M - Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 50 mm [2 in.] Cube Specimens); 2026.
- B. ASTM C472 - Standard Test Methods for Physical Testing of Gypsum, Gypsum Plasters, and Gypsum Concrete; 2020.
- C. ASTM F710 - Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring; 2022.
- D. ASTM F2170 - Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes; 2019a.
ASTM F2659 - surface moisture test using electrical impedance meter

1.04 SUBMITTALS

- A. Visual Observation Report: For existing floor coverings to be removed.
- B. Adhesive Bond and Compatibility Test Report.

1.05 QUALITY ASSURANCE

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, handle, and protect products in accordance with manufacturer's instructions and recommendations.
- B. Deliver materials in manufacturer's packaging; include installation instructions.
- C. Keep materials from freezing.

1.07 FIELD CONDITIONS

- A. Maintain ambient temperature in spaces where concrete testing is being performed, and for at least 72 hours prior to testing, at not less than 65 degrees F or more than 85 degrees F.
- B. Maintain relative humidity in spaces where concrete testing is being performed, and for at least 48 hours prior to testing, at not less than 40 percent and not more than 60 percent or as per manufacturers requirements.
- C. Product, substrate and adhesive are to acclimatize together. All are to be within 5° of each other prior to installation.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Patching Compound: Floor covering manufacturer's recommended product, suitable for conditions, and compatible with adhesive and floor covering. In the absence of any

recommendation from flooring manufacturer, provide a product with the following characteristics:

1. Cementitious moisture-, mildew-, and alkali-resistant compound, compatible with floor, floor covering, and floor covering adhesive, and capable of being feathered to nothing at edges.
 2. Compressive Strength: 3000 psi, minimum, after 28 days, when tested in accordance with ASTM C109/C109M or ASTM C472, whichever is appropriate.
- B. Self Leveling Underlayment: Floor covering manufacturer's recommended product, suitable for the moisture and pH conditions present; low-VOC. In the absence of any recommendation from flooring manufacturer, provide the following:
1. Manufacturers:
 - a. Sika
 2. Thickness: As required for application and in accordance with manufacturer's installation instructions.
 3. Products:
 - a. SikaLevel
 - b. Substitutions: See Section 01 6000-Product Requirements.

PART 3 EXECUTION

3.01 CONCRETE SLAB PREPARATION

- A. Follow recommendations of testing agency.
- B. Perform following operations in the order indicated:
 1. Existing concrete slabs (on-grade and elevated) with existing floor coverings:
 - a. Visual observation of existing floor covering, for adhesion, water damage, alkaline deposits, and other defects.
 - b. Removal of existing floor covering.
 2. Preliminary cleaning.
 3. Specified remediation, if required.
 4. Patching, smoothing, and leveling, as required.
 5. Other preparation specified.
 6. Adhesive bond and compatibility test.
 7. Protection.
- C. Remediations:
 1. Active Water Leaks or Continuing Moisture Migration to Surface of Slab: Correct this condition before doing any other remediation; re-test after correction.
 2. Excessive Moisture Emission or Relative Humidity: If an adhesive that is resistant to the level of moisture present is available and acceptable to flooring manufacturer, use that adhesive for installation of the flooring; if not, apply remedial floor coating or remedial sheet membrane over entire suspect floor area.

3.02 REMOVAL OF EXISTING FLOOR COVERINGS

- A. Dispose of removed materials in accordance with local, State, and federal regulations and as specified.

3.03 PRELIMINARY CLEANING

- A. Clean floors of dust, solvents, paint, wax, oil, grease, asphalt, residual adhesive, adhesive removers, film-forming curing compounds, sealing compounds, alkaline salts, excessive laitance, mold, mildew, and other materials that might prevent adhesive bond.
- B. Do not use solvents or other chemicals for cleaning.

3.04 INTERNAL RELATIVE HUMIDITY TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.

- B. Test in accordance with ASTM F2170 Procedure A and as follows.
- C. In the event that test values exceed floor covering manufacturer's limits, perform remediation as indicated. In the absence of manufacturer limits, perform remediation if any test value exceeds 75 percent relative humidity.

3.05 ALKALINITY TESTING

- A. Where the floor covering manufacturer's requirements conflict with either the referenced test method or this specification, comply with the manufacturer's requirements.
- B. The following procedure is the equivalent of that described in ASTM F710, repeated here for the CMGC Contractor's convenience.
- C. Use a wide range alkalinity (pH) test paper, its associated chart, and distilled or deionized water.
- D. Place several drops of water on a clean surface of concrete, forming a puddle approximately 1 inch in diameter. Allow the puddle to set for approximately 60 seconds, then dip the alkalinity (pH) test paper into the water, remove it, and compare immediately to chart to determine alkalinity (pH) reading.

3.06 PREPARATION

- A. See individual floor covering section(s) for additional requirements.
- B. Comply with requirements and recommendations of floor covering manufacturer.
- C. Fill and smooth surface cracks, grooves, depressions, control joints and other non-moving joints, and other irregularities with patching compound.
- D. Do not fill expansion joints, isolation joints, or other moving joints.

3.07 ADHESIVE BOND AND COMPATIBILITY TESTING

- A. Comply with requirements and recommendations of floor covering manufacturer.

3.08 PROTECTION

- A. Cover prepared floors with building paper or other durable covering.

This page intentionally left blank

**SECTION 09 2116
GYPSUM BOARD ASSEMBLIES**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Gypsum wallboard.
- B. Joint treatment and accessories.

1.02 RELATED REQUIREMENTS

- A. Section 01 6116 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 06 1000 - Rough Carpentry: Wood blocking product and execution requirements.
- C. Section 07 2100 - Thermal Insulation: Acoustic insulation.
- D. Section 07 2500 - Weather Barriers: Water-resistive barrier over sheathing.
- E. Section 07 8400 - Firestopping: Top-of-wall assemblies at fire-resistance-rated walls.
- F. Section 07 9200 - Joint Sealants: Sealing acoustical gaps in construction other than gypsum board or plaster work.

1.03 REFERENCE STANDARDS

- A. ASTM C754 - Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products; 2020.
- B. ASTM C840 - Standard Specification for Application and Finishing of Gypsum Board; 2025.
- C. ASTM C1396/C1396M - Standard Specification for Gypsum Board; 2024.
- D. GA-216 - Application and Finishing of Gypsum Panel Products; 2024.
- E. GA-600 - Fire Resistance and Sound Control Design Manual; 2024.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data:

1.05 DELIVERY, STORAGE, AND HANDLING

- A. See Section 01 7419 - Construction Waste Management and Disposal for packaging waste requirements.
- B. Store gypsum products and accessories indoors and keep above freezing. Elevate boards above floor, on nonwicking supports, in accordance with manufacturer's recommendations.

PART 2 PRODUCTS

2.01 BOARD MATERIALS

- A. Manufacturers - Gypsum-Based Board:
 - 1. American Gypsum Company: www.americangypsum.com/#sle.
 - 2. CertainTeed Corporation: www.certainteed.com/#sle.
 - 3. Georgia-Pacific Gypsum: www.gpgypsum.com/#sle.
 - 4. National Gypsum Company: www.nationalgypsum.com/#sle.
 - 5. USG Corporation: www.usg.com/#sle.
 - 6. Substitutions: See Section 01 6000 - Product Requirements.
- B. Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 - 1. Application: Use for vertical surfaces and ceilings, unless otherwise indicated.
 - 2. At Assemblies Indicated with Fire-Resistance Rating: Use type required by indicated tested assembly; if no tested assembly is indicated, use Type X board, UL or WH listed.
 - 3. Thickness:
 - a. Vertical Surfaces: 5/8 inch.

- b. Ceilings: 5/8 inch.
- C. Ceiling Board: Special sag resistant gypsum ceiling board as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 - 1. Application: ceilings in wet areas, unless otherwise indicated.
 - 2. Thickness: 5/8 inch.
 - 3. Edges: Tapered.

2.02 GYPSUM BOARD ACCESSORIES

- A. Beads, Joint Accessories, and Other Trim: ASTM C1047, galvanized steel or rolled zinc, unless noted otherwise.
 - 1. Corner Beads: Low profile, for 90 degree outside corners.
 - 2. Expansion Joints:
 - a. Type: V-shaped metal with factory-installed protective tape.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that project conditions are appropriate for work of this section to commence.

3.02 BOARD INSTALLATION

- A. Comply with ASTM C840, GA-216, and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- B. Single-Layer Nonrated: Install gypsum board in most economical direction, with ends and edges occurring over firm bearing.

3.03 INSTALLATION OF TRIM AND ACCESSORIES

- A. Control Joints: Place control joints consistent with lines of building spaces and as indicated on drawings.
 - 1. Not more than 30 feet apart on walls and ceilings over 50 feet long.
 - 2. At exterior soffits, not more than 30 feet apart in both directions.
- B. Corner Beads: Install at external corners, using longest practical lengths.
- C. Edge Trim: Install at locations where gypsum board abuts dissimilar materials.

END OF SECTION

**SECTION 09 3000
TILING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Tile for floor applications.
- B. Tile for wall applications.

NOTE: SOME PRODUCTS HAVE LONGER LEAD TIMES. CONTRACTOR SHALL SCHEDULE ACCORDINGLY.

1.02 RELATED REQUIREMENTS

- A. Section 07 9200 - Joint Sealants: Sealing joints between tile work and adjacent construction and fixtures.

1.03 REFERENCE STANDARDS

- A. ANSI A118.3 - American National Standard Specifications for Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy and Water Cleanable Tile-Setting Epoxy Adhesive; 2021.
- B. ANSI A118.4 - American National Standard Specifications for Modified Dry-Set Cement Mortar; 2023.
- C. ANSI A118.10 - American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation; 2023.
- D. ANSI A118.12 - American National Standard Specifications for Crack Isolation Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation; 2014 (Reaffirmed 2024).
- E. ANSI A137.1 - American National Standard Specifications for Ceramic Tile; 2022.
- F. ANSI A326.3 - American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials; 2021.
- G. ASTM C373 - Standard Test Methods for Determination of Water Absorption and Associated Properties by Vacuum Method for Pressed Ceramic Tiles and Glass Tiles and Boil Method for Extruded Ceramic Tiles and Non-tile Fired Ceramic Whiteware Products; 2018 (Reapproved 2023).
- H. TCNA (HB) - Handbook for Ceramic, Glass, and Stone Tile Installation; 2026.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide manufacturers' data sheets on tile, mortar, grout, and accessories. Include instructions for using grouts and adhesives.
- C. Shop Drawings: Indicate tile layout, patterns, color arrangement, perimeter conditions, junctions with dissimilar materials, control and expansion joints, thresholds, and setting details.
- D. Samples: Mount tile and apply grout on two plywood panels, minimum 18 by 18 inches in size illustrating pattern, color variations, and grout joint size variations.
- E. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 6000 - Product Requirements, for additional provisions.
 - 2. Extra Tile: 2 percent of each size, color, and surface finish combination, but not less than 1 box of each type.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the types of products specified in this section, with minimum five years of documented experience.
- B. Installer Qualifications: Company specializing in performing tile installation, with minimum of five years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. See Section 01 7419 - Construction Waste Management and Disposal for packaging waste requirements.
- B. Protect adhesives from freezing or overheating in accordance with manufacturer's instructions.

1.07 FIELD CONDITIONS

- A. Maintain ambient and substrate temperature above 50 degrees F and below 100 degrees F during installation and curing of setting materials.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Tile:
 - 1. As indicated on drawings.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PERFORMANCE REQUIREMENTS

- A. Floor Tile: Provide tile for flooring applications with minimum wet Dynamic Coefficient of Friction (DCOF) of 0.42 when tested in accordance with ANSI A326.3.

2.03 TILE

- A. Ceramic Mosaic Tile: ANSI A137.1 standard grade.
 - 1. Moisture Absorption: 0 to 0.5 percent as tested in accordance with ASTM C373.
 - 2. Size: As indicated on drawings.
 - 3. Shape: As indicated on drawings.
 - 4. Edges: Square.
 - 5. Color: As indicated on drawings.
 - 6. Trim Units: Cove Base as indicated in drawings.

2.04 TRIM AND ACCESSORIES

- A. Ceramic Trim: Matching cove base ceramic shapes in sizes coordinated with field tile.
 - 1. Applications:
 - a. Floor to Wall Joints: Cove base.
- B. Non-Ceramic Trim: Anodized extruded aluminum, style and dimensions to suit application, set with tile mortar or adhesive.
 - 1. Applications:
 - a. As indicated on drawings.
 - 2. Products:
 - a. Schluter-Systems; ____: www.schluter.com/#sle.
 - b. Substitutions: See Section 01 6000 - Product Requirements.

2.05 SETTING MATERIALS

- A. Latex-Portland Cement Mortar Bond Coat: ANSI A118.4.

2.06 GROUTS

- A. Epoxy Grout: ANSI A118.3 chemical resistant and water-cleanable epoxy grout.
 - 1. Applications: Where indicated.
 - 2. Color: As indicated on drawings.

2.07 MAINTENANCE MATERIALS

2.08 ACCESSORY MATERIALS

- A. Waterproofing Membrane at Floors: Specifically designed for bonding to cementitious substrate under thick mortar bed or thin-set tile; complying with ANSI A118.10.
 - 1. Crack Resistance: No failure at 1/16-inch gap, minimum; comply with ANSI A118.12.
 - 2. Fluid or Trowel Applied Type:

- a. Material: Synthetic rubber or Acrylic.
- b. Thickness: 25 mils, minimum, dry film thickness.
- c. Products:
 - 1) Custom Building Products; RedGard Crack Prevention and Waterproofing Membrane: www.custombuildingproducts.com/#sle.
 - 2) Substitutions: See Section 01 6000 - Product Requirements.

B. Reinforcing Mesh: 2 by 2 inch size weave of 16/16 wire size; welded fabric, galvanized.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify subfloor surfaces are smooth and flat within tolerances specified for that type of work and are ready to receive tile.
- B. Verify that subfloor surfaces are dust free and free of substances that could impair bonding of setting materials to subfloor surfaces.

3.02 PREPARATION

- A. Vacuum clean surfaces and damp clean.
- B. Seal substrate surface cracks with filler.

3.03 INSTALLATION - GENERAL

- A. Install tile and thresholds and grout in accordance with applicable requirements of ANSI A108.1a through ANSI A108.13, manufacturer's instructions, and TCNA (HB) recommendations.
- B. Lay tile to pattern indicated on drawings. Do not interrupt tile pattern through openings.
- C. Cut and fit tile to penetrations through tile, leaving sealant joint space. Form corners and bases neatly. Align floor joints.
- D. Place tile joints uniform in width, subject to variance in tolerance allowed in tile size. Make grout joints without voids, cracks, excess mortar or excess grout, or too little grout.
- E. Form internal angles square and external angles bullnosed.
- F. Install non-ceramic trim in accordance with manufacturer's instructions.
- G. Sound tile after setting. Replace hollow sounding units.
- H. Keep control and expansion joints free of mortar, grout, and adhesive.
- I. Prior to grouting, allow installation to completely cure; minimum of 48 hours.
- J. Grout tile joints unless otherwise indicated.
- K. At changes in plane and tile-to-tile control joints, use tile sealant instead of grout, with either bond breaker tape or backer rod as appropriate to prevent three-sided bonding.

3.04 INSTALLATION - FLOORS - THIN-SET METHODS

- A. Over interior concrete substrates, install in accordance with TCNA (HB) Method as listed below, with grout, unless otherwise indicated.
 - 1. Where epoxy or furan grout is indicated on drawings, but not epoxy or furan bond coat, install in accordance with TCNA (HB) Method F115.

3.05 INSTALLATION - WALL TILE

- A. Over cementitious backer units on studs, install in accordance with TCNA (HB) Method W244C, using membrane at toilet rooms.
- B. Over gypsum wallboard on wood or metal studs, install in accordance with TCNA (HB) Method W243, thin-set with dry-set or latex-Portland cement bond coat.

3.06 CLEANING

- A. Clean tile and grout surfaces.

3.07 PROTECTION

- A. Do not permit traffic over finished floor surface for 4 days after installation.

END OF SECTION

**SECTION 09 6500
RESILIENT FLOORING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Resilient tile flooring.
- B. Resilient base.
- C. Installation accessories.

1.02 RELATED REQUIREMENTS

- A. Section 03 3000 - Cast-in-Place Concrete: Restrictions on curing compounds for concrete slabs and floors to receive adhesive-applied resilient flooring.
- B. Section 09 0561 - Common Work Results for Flooring Preparation: Removal of existing floor coverings, cleaning, and preparation.
- C. Section 09 0561-Common Work Results for Flooring Preparation: Time of Install Testing & Environmental Verification.
- D. Section 26 0526 - Grounding and Bonding for Electrical Systems: Grounding and bonding of static control flooring to building grounding system.

1.03 REFERENCE STANDARDS

- A. ASTM F1066 - Standard Specification for Vinyl Composition Floor Tile; 2025.
- B. ASTM F1303 - Standard Specification for Sheet Vinyl Floor Covering with Backing; 2026.
- C. ASTM F1861 - Standard Specification for Resilient Wall Base; 2021 (Reapproved 2025).

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on specified products, describing physical and performance characteristics; including sizes, patterns and colors available; and installation instructions.
- C. Shop Drawings: Indicate seaming plans and floor patterns.
- D. Verification Samples: Submit two samples, 6 by 6 inch in size illustrating color and pattern for each resilient flooring product specified.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing specified flooring with minimum three years documented experience.
- B. Installer Qualifications: Company specializing in installing specified flooring with minimum three years documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Upon receipt, immediately remove any shrink-wrap and check materials for damage and the correct style, color, quantity and run numbers.
- B. Store all materials off of the floor in an acclimatized, weather-tight space.
- C. Maintain temperature in storage area between 55 degrees F and 90 degrees F.
- D. Protect roll materials from damage by storing on end.
- E. Do not double stack pallets.

1.07 FIELD CONDITIONS

- A. Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

PART 2 PRODUCTS

2.01 SHEET FLOORING

- A. Vinyl Sheet Flooring - Type ____: Heterogenous, transparent or translucent vinyl wear layer over interlayer and backing.
 - 1. Manufacturers:
 - a. As indicated on drawings
 - b. Substitutions: See Section 01 6000 - Product Requirements.
 - 2. Minimum Requirements: Comply with ASTM F1303, Type I, with Class A fibrous backing.
 - 3. Wear Layer Thickness: 0.020 inch minimum.
 - 4. Total Thickness: 0.080 inch minimum.

2.02 TILE FLOORING

- A. Vinyl Composition Tile - Type ____: Homogeneous, with color extending throughout thickness.
 - 1. Manufacturers:
 - a. As indicated on drawings.
 - b. Substitutions: See Section 01 6000 - Product Requirements.
 - 2. Minimum Requirements: Comply with ASTM F1066, of Class corresponding to type specified.
 - 3. Size: 12 by 12 inch.
 - 4. Thickness: 0.125 inch.

2.03 RESILIENT BASE

- A. Resilient Base: ASTM F1861, Type TP, rubber, thermoplastic; top set Style B, Cove.
 - 1. Manufacturers:
 - a. Roppe Corporation: www.roppe.com/#sle.
 - b. Substitutions: See Section 01 6000 - Product Requirements.
 - 2. Height: 4 inches.
 - 3. Thickness: 0.125 inch.
 - 4. Finish: Satin.
 - 5. Length: Roll.
 - 6. Color: As indicated on drawings.
 - 7. Accessories: Premolded external corners.

2.04 ACCESSORIES

- A. Primers, Adhesives, and Seam Sealer: Waterproof; types recommended by flooring manufacturer.
- B. Moldings, Transition and Edge Strips: Same material as flooring.
 - 1. Manufacturers:
 - a. Johnsonite: www.johnsonite.com.
 - b. Roppe Corp:[None - N/A]: www.roppe.com/#sle.
 - c. Substitutions: See Section 01 6000 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces are flat to tolerances acceptable to flooring manufacturer, free of cracks that might telegraph through flooring, clean, dry, and free of curing compounds, surface hardeners, and other chemicals that might interfere with bonding of flooring to substrate.
- B. Verify that wall surfaces are smooth and flat within the tolerances specified for that type of work, are dust-free, and are ready to receive resilient base.
- C. Cementitious Subfloor Surfaces: Verify that substrates are ready for resilient flooring installation by testing for moisture and alkalinity (pH).
 - 1. Test in accordance with Section 09 0561.

2. Obtain instructions if test results are not within limits recommended by resilient flooring manufacturer and adhesive materials manufacturer.

3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Remove subfloor ridges and bumps. Fill minor low spots, cracks, joints, holes, and other defects with subfloor filler to achieve smooth, flat, hard surface.
- C. Prohibit traffic until filler is fully cured.
- D. Clean substrate.

3.03 INSTALLATION - GENERAL

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install in accordance with manufacturer's written instructions.
- C. Spread only enough adhesive to permit installation of materials before initial set.
- D. Fit joints and butt seams tightly.
- E. Set flooring in place, press with heavy roller to attain full adhesion.
- F. Where type of floor finish, pattern, or color are different on opposite sides of door, terminate flooring under centerline of door.
- G. Install edge strips at unprotected or exposed edges, where flooring terminates, and where indicated.
- H. Scribe flooring to walls, columns, cabinets, floor outlets, and other appurtenances to produce tight joints.

3.04 INSTALLATION - SHEET FLOORING

- A. Lay flooring with joints and seams parallel to longer room dimensions, to produce minimum number of seams. Lay out seams to avoid widths less than 1/3 of roll width; match patterns at seams.
- B. Cut sheet at seams in accordance with manufacturer's instructions.

3.05 INSTALLATION - TILE FLOORING

- A. Mix tile from container to ensure shade variations are consistent when tile is placed, unless otherwise indicated in manufacturer's installation instructions.
- B. Fully adhere resilient flooring to substrate.

3.06 INSTALLATION - RESILIENT BASE

- A. Fit joints tightly and make vertical. Maintain minimum dimension of 18 inches between joints.
- B. Install base on solid backing. Bond tightly to wall and floor surfaces.
- C. Scribe and fit to door frames and other interruptions.

3.07 CLEANING

- A. Remove excess adhesive from floor, base, and wall surfaces without damage.
- B. Clean in accordance with manufacturer's written instructions.

3.08 PROTECTION

- A. Prohibit traffic on resilient flooring for 48 hours after installation.

END OF SECTION

This page intentionally left blank

**SECTION 09 6813
TILE CARPETING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Carpet tile, fully adhered.

1.02 RELATED REQUIREMENTS

- A. Section 01 6116 - Volatile Organic Compound (VOC) Content Restrictions.

1.03 REFERENCE STANDARDS

- A. ASTM D2859 - Standard Test Method for Ignition Characteristics of Finished Textile Floor Covering Materials; 2016 (Reapproved 2021).
- B. ASTM E648 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source; 2025a.
- C. CRI 104 - Standard for Installation of Commercial Carpet; 2018.
- D. NFPA 253 - Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source; 2023.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Samples: Submit two carpet tiles illustrating backing,color and pattern design for each carpet color selected.
- C. Operation and Maintenance Data: Include maintenance procedures, recommended maintenance materials, and suggested schedule for cleaning.
- D. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 6000 - Product Requirements, for additional provisions.
 - 2. Extra Carpet Tiles: Quantity equal to 5 percent of total installed of each color and pattern installed.

1.05 QUALITY ASSURANCE

- A. Installer Qualifications: Company specializing in installing carpet tile with minimum three years documented experience and approved by carpet tile manufacturer.

1.06 FIELD CONDITIONS

- A. Store materials in area of installation for minimum period of 24 hours prior to installation.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Tile Carpeting:
 - 1. As indicated on drawings.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

2.02 MATERIALS

- A. Tile Carpeting: manufactured in one color dye lot.
 - 1. Tile Size: varies
 - 2. Color: As indicated on drawings.
 - 3. Pattern: As indicated on drawings.
 - 4. Critical Radiant Flux: Minimum of 0.22 watts/sq cm, when tested in accordance with ASTM E648 or NFPA 253.
 - 5. Surface Flammability Ignition: Pass ASTM D2859 (the "pill test").
 - 6. VOC Content: Comply with Section 01 6116.

2.03 ACCESSORIES

- A. Carpet Tile Adhesive: Recommended by carpet tile manufacturer.
- B. Transitions: As indicated on drawings.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that subfloor surfaces are smooth and flat within tolerances specified for that type of work and are ready to receive carpet tile.
- B. Verify that subfloor surfaces are dust-free and free of substances that could impair bonding of adhesive materials to subfloor surfaces.
- C. Verify that required floor-mounted utilities are in correct location.

3.02 PREPARATION

- A. Prepare floor substrates as recommended by flooring and adhesive manufacturers.
- B. Remove subfloor ridges and bumps. Fill minor or local low spots, cracks, joints, holes, and other defects with subfloor filler.
- C. Apply, trowel, and float filler to achieve smooth, flat, hard surface. Prohibit traffic until filler is cured.

3.03 INSTALLATION

- A. Starting installation constitutes acceptance of subfloor conditions.
- B. Install carpet tile in accordance with manufacturer's instructions and CRI 104 (Commercial).
- C. Blend carpet from different cartons to ensure minimal variation in color match.
- D. Cut carpet tile clean. Fit carpet tight to intersection with vertical surfaces without gaps.
- E. Locate change of color or pattern between rooms under door centerline.
- F. Fully adhere carpet tile to substrate.
- G. Trim carpet tile neatly at walls and around interruptions.
- H. Complete installation of edge strips, concealing exposed edges.

3.04 CLEANING

- A. Remove excess adhesive without damage, from floor, base, and wall surfaces.
- B. Clean and vacuum carpet surfaces.

END OF SECTION

**SECTION 09 9123
INTERIOR PAINTING**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints, stains and varnishes.
- C. Scope: Finish interior surfaces exposed to view, unless fully factory-finished and unless otherwise indicated.
 - 1. Prime surfaces to receive wall coverings.
 - 2. Mechanical and Electrical:
 - a. In finished areas, paint insulated and exposed pipes, conduit, and boxes, insulated and exposed ducts, hangers, brackets, collars and supports, mechanical equipment and electrical equipment, unless otherwise indicated.
 - b. Paint interior surfaces of air ducts and convectors and baseboard heating cabinets that are visible through grilles and louvers with one coat of flat black paint to visible surfaces.
- D. Do Not Paint or Finish the Following Items:
 - 1. Items factory-finished unless otherwise indicated; materials and products having factory-applied primers are not considered factory finished.
 - 2. Items indicated to receive other finishes.
 - 3. Items indicated to remain unfinished.
 - 4. Fire rating labels, equipment serial number and capacity labels, bar code labels, and operating parts of equipment.
 - 5. Floors, unless specifically indicated.
 - 6. Glass.
 - 7. Concealed pipes, ducts, and conduits.

1.02 RELATED REQUIREMENTS

- A. Section 016116 - Volatile Organic Compound (VOC) Content Restrictions.
- B. Section 055000 - Metal Fabrications: Shop-primed items.
- C. Section 099600 - High-Performance Coatings.

1.03 REFERENCE STANDARDS

- A. ASTM D16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications; 2024.
- B. ASTM D4258 - Standard Practice for Surface Cleaning Concrete for Coating; 2023.
- C. SSPC-SP 1 - Solvent Cleaning; 2015, with Editorial Revision (2016).
- D. SSPC-SP 2 - Hand Tool Cleaning; 2024.
- E. SSPC-SP 3 - Power Tool Cleaning; 2024.
- F. SSPC-SP 6 - Commercial Blast Cleaning 2007.
- G. SSPC-SP 13 - Surface Preparation of Concrete 1997 (Reaffirmed 2003).

1.04 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide complete list of products to be used, with the following information for each:
 - 1. Manufacturer's name, product name and/or catalog number, and general product category (e.g. "alkyd enamel").

2. Cross-reference to specified paint system(s) product is to be used in; include description of each system.
3. Manufacturer's installation instructions.
- C. Samples: Submit TWO paper "draw down" samples, 8" X 11" in size, and illustrating range of colors available for each finishing product specified.
 1. Where sheen is specified, submit samples in only that sheen.
- D. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 016000 - Product Requirements, for additional provisions.
 2. Extra Paint and Finish Materials: 1 gallon (4 L) of each color; from the same product run, store where directed.
 3. Label each container with color in addition to the manufacturer's label.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified, with minimum three years documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified with minimum three years' experience and approved by manufacturer.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees Fahrenheit and a maximum of 90 degrees Fahrenheit, in ventilated area, and as required by manufacturer's instructions.
- D. FIELD CONDITIONS
 1. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
 2. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
 3. Provide lighting level of 80 ft candles (860 lx) measured mid-height at substrate surface.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Provide paints and finishes from the same manufacturer to the greatest extent possible.
 1. In the event that a single manufacturer cannot provide specified products, minor exceptions will be permitted provided approval by Architect is obtained using the specified procedures for substitutions.
 - a. Basis-of-Design Product: Painting and coating products manufactured by
 - 1) Sherwin-Williams Company: www.protective.sherwin-williams.com/industries/#sle.
 - b. Paints:
 - 1) Benjamin Moore Paints; benjaminmoore.com.
 - 2) PPG Paints: www.ppgpaints.com

2.02 PAINTS AND FINISHES - GENERAL

- A. Paints and Finishes: Ready mixed, unless intended to be a field-catalyzed paint.
 1. Provide paints and finishes of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.

2. Provide materials that are compatible with one another and the substrates indicated under conditions of service and application, as demonstrated by manufacturer based on testing and field experience.
 3. Supply each paint material in quantity required to complete entire project's work from a single production run.
 4. Do not reduce, thin, or dilute paint or finishes or add materials.
- B. Volatile Organic Compound (VOC) Content: Comply with Section 016116.
- C. Flammability: Comply with applicable code for surface burning characteristics.
- D. Sheens: Provide the sheens specified; where sheen is not specified, sheen will be selected later by Architect from the manufacturer's full line.
- E. Colors: To be selected from manufacturer's full range of available colors.
1. Selection to be made by Architect after award of contract.
 2. Extend colors to surface edges; colors may change at any edge as directed by Architect.
 3. In finished areas, finish pipes, ducts, conduit, and equipment the same color as the wall/ceiling they are mounted on/under.
 4. In utility areas, finish equipment, piping, conduit, and exposed duct work in colors according to the color coding scheme indicated.

2.03 PAINT SYSTEMS - INTERIOR

- A. Paint I-OP - Interior Surfaces to be Painted, Unless Otherwise Indicated: Including gypsum board, concrete, concrete masonry units, brick, wood, plaster, uncoated steel, shop primed steel, galvanized steel and aluminum.
1. Two top coats and one coat primer.
 2. Top Coat(s): High Performance Architectural Interior Latex.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial DTM B66 Series or Scuff Tuff S24 Series (drywall high traffic)
 - 2) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1110 Series, Satin.
 3. Top Coat(s): Institutional Low Odor/VOC Interior Latex.
 - a. Products:
 - 1) Sherwin Williams - ProMar 200 Zero B20 Series
 - 2) PPG Paints Speed-hide zero Latex, 6-4410XI Series, Satin.
 4. Top Coat Sheen:
 - a. Satin: MPI gloss level 4; use this sheen for items subject to frequent touching by occupants, including door frames and railings.
 - b. Semi-Gloss: MPI gloss level 5; use this sheen at all locations.
 5. Primer: As recommended by top coat manufacturer for specific substrate.
- B. Paint I-OP-MD-DT - Medium Duty Door/Trim: For surfaces subject to frequent contact by occupants, including metals and wood:
1. Two top coats and one coat primer.
 2. Top Coat(s): High Performance Architectural Interior Latex.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial DTM B66 Series Satin
 - 2) Sherwin Williams - Pro Industrial DTM B66 Series Semi-Gloss
 - 3) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1110 Series, Satin.
 - 4) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1210 Series, Semi-Gloss.
 3. Top Coat Sheen:
 - a. Satin: MPI gloss level 4; use this sheen at all locations.
 - b. Semi-Gloss: MPI gloss level 5; use this sheen at all locations.
 4. Primer: As recommended by top coat manufacturer for specific substrate.

- C. Paint I-OP-MD-WC - Medium Duty Vertical and Overhead: Including gypsum board, plaster, concrete, concrete masonry units, uncoated steel, shop primed steel, galvanized steel and aluminum.
 - 1. Two top coats and one coat primer.
 - 2. Top Coat(s): Interior Light Industrial Coating, Water Based.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial DTM B66 Series Satin
 - 2) Sherwin Williams - Pro Industrial DTM B66 Series Semi-Gloss
 - 3) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1110 Series, Satin.
 - 4) PPG Paints Pitt-Tech Plus WB DTM Industrial Enamel, 90-1210 Series, Semi-Gloss.
 - 3. Primer: As recommended by top coat manufacturer for specific substrate.
- D. Paint I-OP-DF - Dry Fall: Metals; exposed structure and overhead-mounted services in utilitarian spaces, including shop primed steel deck, structural steel, metal fabrications, galvanized ducts, galvanized conduit, galvanized piping.
 - 1. Shop primer by others.
 - 2. Top Coat: Water Based Dry Fall for Galvanized Steel.
 - a. Products:
 - 1) Sherwin Williams - Pro Industrial Waterborne Dryfall B42 Flat
 - 2) Sherwin Williams - Pro Industrial Waterborne Dryfall B42 SG
 - 3) PPG Paints Speed hide Super Tech Water Based Interior Dry-Fog, 6-735XI, Flat.
 - 4) PPG Paints Speed hide Super Tech Water Based Interior Dry-Fog, 6-727XI, Semi-Gloss.
 - 3. Primer: As recommended by top coat manufacturer for specific substrate.
- E. Paint I-TR-C - Transparent Finish on Concrete Floors.
 - 1. 2 coats sealer.
 - 2. Sealer: Water Based for Concrete Floors; MPI #99.
 - a. Products:
 - 1) Sherwin Williams – H&C Clarishield Sealer
 - 2) PPG Paints Perma-Crete Plex-Seal WB Interior/Exterior Clear Sealer Stain, 4-6200. (MPI #99)

2.04 PRIMERS

- A. Primers: Provide the following unless other primer is required or recommended by manufacturer of top coats.
 - 1. Alkali Resistant Water Based Primer.
 - a. Products:
 - 1) Sherwin Williams – Loxon & Masonry Primer LX02
 - 2) PPG Paints Perma-Crete Interior/Exterior Alkali Resistant Primer, 4-603 Series.
 - 2. Interior Institutional Low Odor/VOC Primer Sealer.
 - a. Products:
 - 1) Sherwin Williams – ProMar 200 Zero Primer B28
 - 2) PPG Paints Speed hide zero Interior Latex Sealer, 6-4900XI.
 - 3. Interior/Exterior Latex Block Filler.
 - a. Products:
 - 1) Sherwin Williams – PrepRite Block Filler B25 Series
 - 2) PPG Paints Speed hide Masonry Hi Fill Latex Block Filler, 6-15.
 - 4. Interior Latex Primer Sealer.
 - a. Products:
 - 1) Sherwin Williams – ProMar 200 Zero Primer B28
 - 2) PPG Paints Speed hide Interior Latex Sealer, 6-2.
 - 5. Interior Drywall Primer Sealer.

- a. Products:
 - 1) Sherwin Williams - ProMar 200 Zero Primer B28
 - 2) PPG Paints Speed hide Interior Latex Sealer, 6-2.
- 6. Anti-Corrosive Alkyd Primer for Metal.
 - a. Products:
 - 1) Sherwin Williams – ProCryl Universal Metal Primer B66-310
 - 2) PPG Devguard Multi-Purpose Primer, 4160 Series.
- 7. Interior/Exterior Quick Dry Alkyd Primer for Metal.
 - a. Products:
 - 1) Sherwin Williams – ProCryl Universal Metal Primer B66-310
 - 2) PPG Devguard Multi-Purpose Primer, 4160 Series.
- 8. Interior Water Based Primer for Galvanized Metal.
 - a. Products:
 - b. Sherwin Williams – Pro Industrial DTM Primer Finish B66 Series
 - c. PPG Paints Pitt-Tech plus DTM Industrial Primer, 90-912 Series.

2.05 ACCESSORY MATERIALS

- A. Accessory Materials: Provide primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials as required for final completion of painted surfaces.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin application of paints and finishes until substrates have been properly prepared.
- B. Verify that surfaces are ready to receive work as instructed by the product manufacturer.
- C. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially effect proper application.
- D. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.
- E. Test shop-applied primer for compatibility with subsequent cover materials.
- F. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
 - 1. Gypsum Wallboard: 12 percent.
 - 2. Plaster and Stucco: 12 percent.
 - 3. Masonry, Concrete, and Concrete Masonry Units: 12 percent.
 - 4. Concrete Floors and Traffic Surfaces: 8 percent.

3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Remove or repair existing paints or finishes that exhibit surface defects.
- D. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- E. Seal surfaces that might cause bleed through or staining of topcoat.
- F. Concrete:
 - 1. Remove release agents, curing compounds, efflorescence, and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces to be coated exceeds that permitted in manufacturer's written instructions.

2. Clean concrete according to ASTM D4258. Allow to dry.
 3. Prepare surface as recommended by top coat manufacturer and according to SSPC-SP 13.
- G. Masonry:
1. Remove efflorescence and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces or if alkalinity of mortar joints exceed that permitted in manufacturer's written instructions. Allow to dry.
 2. Prepare surface as recommended by top coat manufacturer.
- H. Concrete Floors and Traffic Surfaces: Remove contamination, acid etch, and rinse floors with clear water. Verify required acid-alkali balance is achieved. Allow to dry.
- I. Gypsum Board: Fill minor defects with filler compound. Spot prime defects after repair.
- J. Galvanized Surfaces:
1. Remove surface contamination and oils and wash with solvent according to SSPC-SP 1.
 2. Prepare surface according to SSPC-SP 2.
- K. Ferrous Metal:
1. Solvent clean according to SSPC-SP 1.
 2. Shop-Primed Surfaces: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces. Re-prime entire shop-primed item.
 3. Remove rust, loose mill scale, and other foreign substances using methods recommended in writing by paint manufacturer and blast cleaning according to SSPC-SP 6 "Commercial Blast Cleaning". Protect from corrosion until coated.

3.03 APPLICATION

- A. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components and paint separately.
- B. Apply products in accordance with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual".
- C. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- D. Apply each coat to uniform appearance in thicknesses specified by manufacturer.
- E. Dark Colors and Deep Clear Colors: Regardless of number of coats specified, apply as many coats as necessary for complete hide.
- F. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- G. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.04 CLEANING

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.05 PROTECTION

- A. Protect finishes until completion of project.
- B. Touch-up damaged finishes after Substantial Completion.

END OF SECTION

HARDWARE RANCH VISITOR CENTER

DIVISION 26

ELECTRICAL

260519	LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES
260526	GROUNDING AND BONDING
260529	HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS
260533	RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS
260544	SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING
260548	VIBRATION AND SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS
260553	IDENTIFICATION FOR ELECTRICAL SYSTEMS
262726	WIRING DEVICES
262816	ENCLOSED SWITCHES AND CIRCUIT BREAKERS
265100	INTERIOR LIGHTING

HARDWARE RANCH VISITOR CENTER

END OF TABLE OF CONTENTS

**SECTION 26 0519
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES**

PART 1 - GENERAL

1.01 SUMMARY

- A. Section Includes:
 - 1. Building wires and cables rated 600 V and less.
 - 2. Connectors, splices, and terminations rated 600 V and less.

1.02 CONDUCTOR MATERIAL APPLICATIONS

- A. Feeders: Copper for feeders smaller than No. 4 AWG; copper or aluminum for feeders No. 4 AWG and larger. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
- B. Branch Circuits: Copper. Solid or Stranded for No. 10 AWG and smaller; stranded for No. 8 AWG and larger, except VFC cable, which shall be extra flexible stranded.

1.03 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Exposed Branch Circuits, Including in Crawlspace: Type THHN-2-THWN-2, single conductors in raceway.
- B. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN-2-THWN-2, single conductors in raceway.
- C. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-2-THWN-2, single conductors in raceway.

1.04 INSTALLATION OF CONDUCTORS AND CABLES

- A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.
- B. Complete raceway installation between conductor and cable termination points according to Section 26 0533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.
- C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.
- E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.
- F. Support cables according to Section 26 0529 "Hangers and Supports for Electrical Systems."

1.05 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.
- B. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
 - 1. Use oxide inhibitor in each splice, termination, and tap for aluminum conductors.
- C. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches of slack.

1.06 IDENTIFICATION

- A. Identify and color-code conductors and cables according to Section 26 0553 "Identification for Electrical Systems."
- B. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.

1.07 FIRESTOPPING

- A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Section 07 8413 "Penetration Firestopping."

HARDWARE RANCH VISITOR CENTER REFRESH

SECTION 26 0526 GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.01 SUMMARY

- A. Section includes grounding and bonding systems and equipment.
- B. Section includes grounding and bonding systems and equipment.

1.02 QUALITY ASSURANCE

- A. Comply with UL 467 for grounding and bonding materials and equipment.

PART 2 - PRODUCTS

2.01 CONDUCTORS

- A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.
- B. Bare Copper Conductors:
 - 1. Solid Conductors: ASTM B 3.
 - 2. Stranded Conductors: ASTM B 8.
 - 3. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
 - 4. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.
 - 5. Tinned Bonding Jumper: Tinned-copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.

2.02 CONNECTORS

- A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.
- B. Bolted Connectors for Conductors and Pipes: Copper or copper alloy.
- C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.
- D. Bus-Bar Connectors: Mechanical type, cast silicon bronze, solderless compression-type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

2.03 GROUNDING ELECTRODES

- A. Ground Rods: Copper-clad steel; 3/4 inch by 10 feet.

PART 3 - EXECUTION

3.01 APPLICATIONS

- A. Conductor Terminations and Connections:
 - 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 - 2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
 - 3. Connections to Ground Rods at Test Wells: Bolted connectors.
 - 4. Connections to Structural Steel: Welded connectors.

3.02 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits.

3.03 INSTALLATION

- A. Ground Rods: Drive rods until tops are 2 inches below finished floor or final grade unless otherwise indicated.
- B. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.
 - 1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.

HARDWARE RANCH VISITOR CENTER REFRESH

2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.

END OF SECTION

**SECTION 26 0529
HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS**

PART 1 - GENERAL

1.01 SUMMARY

- A. This Section includes the following:
 - 1. Hangers and supports for electrical equipment and systems.

1.02 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. IMC: Intermediate metal conduit.
- C. RMC: Rigid metal conduit.

1.03 PERFORMANCE REQUIREMENTS

- A. Design supports for multiple raceways capable of supporting combined weight of supported systems and its contents.
- B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.
- C. Rated Strength: Adequate in tension, shear, and pullout force to resist maximum loads calculated or imposed for this Project, with a minimum structural safety factor of five times the applied force.

1.04 QUALITY ASSURANCE

- A. Comply with NFPA 70.

1.05 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Comply with MFMA-4, factory-fabricated components for field assembly.
- B. Raceway and Cable Supports: As described in NECA 1 and NECA 101.
- C. Conduit and Cable Support Devices: Steel hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- D. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.

PART 2 - EXECUTION

2.01 APPLICATION

- A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems except if requirements in this Section are stricter.
- B. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMT, IMC, and RMC as scheduled in NECA 1, where its Table 1 lists maximum spacings less than stated in NFPA 70. Minimum rod size shall be 1/4 inch in diameter.
- C. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2-inch and smaller raceways serving branch circuits and communication systems above suspended ceilings and for fastening raceways to trapeze supports.

2.02 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this Article.
- B. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - 1. To Wood: Fasten with lag screws or through bolts.
 - 2. To New Concrete: Bolt to concrete inserts.
 - 3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
 - 4. To Existing Concrete: Expansion anchor fasteners.
 - 5. Instead of expansion anchors, powder-actuated driven threaded studs provided with lock washers and nuts may be used in existing standard-weight concrete 4 inches thick or greater. Do not use for anchorage to lightweight-aggregate concrete or for slabs less than 4 inches thick.

HARDWARE RANCH VISITOR CENTER REFRESH

6. To Steel: Welded threaded studs complying with AWS D1.1/D1.1M, with lock washers and nuts.
 7. To Light Steel: Sheet metal screws.
 8. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that meet seismic-restraint strength and anchorage requirements.
- C. Drill holes for expansion anchors in concrete at locations and to depths that avoid reinforcing bars.

END OF SECTION 26 0529

**SECTION 26 0533
RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS**

GENERAL

1.01 SUMMARY

- A. Section Includes:
 - 1. Metal conduits, tubing, and fittings.
 - 2. Boxes, enclosures, and cabinets.

1.02 DEFINITIONS

- A. ARC: Aluminum rigid conduit.
- B. GRC: Galvanized rigid steel conduit.
- C. IMC: Intermediate metal conduit.

PRODUCTS

1.03 METAL CONDUITS, TUBING, AND FITTINGS

- A. Listing and Labeling: Metal conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Fittings for Metal Conduit: Comply with NEMA FB 1 and UL 514B.
 - 1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 886 and NFPA 70.
 - 2. Fittings for EMT:
 - a. Material: Steel.
 - b. Type: Setscrew or compression.
- C. Joint Compound for IMC, GRC, or ARC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

1.04 BOXES, ENCLOSURES, AND CABINETS

- A. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations shall be listed for use in wet locations.
- B. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.
- C. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, ferrous alloy or aluminum, Type FD, with gasketed cover.
- D. Metal Floor Boxes:
 - 1. Material: sheet metal.
 - 2. Type: Fully adjustable or Semi-adjustable.
 - 3. Shape: Rectangular.
 - 4. Listing and Labeling: Metal floor boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- E. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
- F. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, with continuous-hinge cover with flush latch unless otherwise indicated.

EXECUTION

1.05 RACEWAY APPLICATION

- A. Outdoors: Apply raceway products as specified below unless otherwise indicated:
 - 1. Exposed Conduit: GRC.
 - 2. Concealed Conduit, Aboveground: GRC.
 - 3. Underground Conduit: RNC, Type EPC-40-PVC,.
 - 4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
- B. Indoors: Apply raceway products as specified below unless otherwise indicated:
 - 1. Exposed, Not Subject to Physical Damage: EMT.

HARDWARE RANCH VISITOR CENTER REFRESH

2. Exposed and Subject to Physical Damage: GRC. Raceway locations include the following:
 - a. Loading dock.
 - b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.
 - c. Tunnels
 3. Concealed in Ceilings and Interior Walls and Partitions: EMT or Metal Clad Cable, (MC Cable)
 4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
 5. Damp or Wet Locations: GRC.
 6. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 stainless steel in institutional and commercial kitchens and damp or wet locations.
- C. Minimum Raceway Size: 3/4-inch trade size.
- D. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.

1.06 INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except where requirements on Drawings or in this article are stricter. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.
- B. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- C. Complete raceway installation before starting conductor installation.
- D. Comply with requirements in Section 26 0529 "Hangers and Supports for Electrical Systems" for hangers and supports.
- E. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 24 inches of changes in direction.
- F. Conceal conduit and EMT within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- G. Support conduit within 24 inches of enclosures to which attached.
- H. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
- I. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors including conductors smaller than No. 4 AWG.
- J. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inch trade size and insulated throat metal bushings on 1-1/2-inch trade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.
- K. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to assure a continuous ground path.
- L. Flexible Conduit Connections: Comply with NEMA RV 3. Use a maximum of 72 inches of flexible conduit for equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
 1. Use LFMC in damp or wet locations.
- M. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.

1.07 FIRESTOPPING

- A. Install firestopping at penetrations of fire-rated floor and wall assemblies. Comply with requirements in Section 07 8413 "Penetration Firestopping."

END OF SECTION 26 0533

SECTION 26 0544

SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. Section Includes:
 - 1. Sleeves for raceway and cable penetration of non-fire-rated construction walls and floors.
 - 2. Sleeve-seal systems.
 - 3. Sleeve-seal fittings.
 - 4. Grout.
 - 5. Silicone sealants.

PART 2 - PRODUCTS

2.01 SLEEVES

- A. Wall Sleeves:
 - 1. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, plain ends.
 - 2. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.
- B. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies: Galvanized-steel sheet; 0.6-mm (0.0239-inch) minimum thickness; round tube closed with welded longitudinal joint, with tabs for screw-fastening the sleeve to the board.
- C. Sleeves for Rectangular Openings:
 - 1. Material: Galvanized sheet steel.
 - 2. Minimum Metal Thickness:
 - a. For sleeve cross-section rectangle perimeter less than 1270 mm (50 inches) and with no side larger than 400 mm (16 inches), thickness shall be 1.3 mm (0.052 inch).
 - b. For sleeve cross-section rectangle perimeter 1270 mm (50 inches) or more and one or more sides larger than 400 mm (16 inches), thickness shall be 3.5 mm (0.138 inch).

2.02 SLEEVE-SEAL SYSTEMS

- A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Advance Products & Systems, Inc.
 - b. CALPICO, Inc.
 - c. Metraflex Company (The).
 - d. Pipeline Seal and Insulator, Inc.
 - e. Proco Products, Inc.
 - 2. Sealing Elements: EPDM or Nitrile (Buna N) rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
 - 3. Pressure Plates: Carbon steel or Stainless steel.
 - 4. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

2.03 SLEEVE-SEAL FITTINGS

- A. Description: Manufactured plastic, sleeve-type, waterstop assembly made for embedding in concrete slab or wall. Unit shall have plastic or rubber waterstop collar with center opening to match piping OD.

HARDWARE RANCH VISITOR CENTER REFRESH

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Presealed Systems.

2.04 GROUT

- A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.
- B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 34.5-MPa (5000-psi), 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

2.05 SILICONE SEALANTS

- A. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants of grade indicated below.
 1. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces that are not fire rated.
 2. Sealant shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- B. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

PART 3 - EXECUTION

3.01 SLEEVE INSTALLATION FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

- A. Comply with NECA 1.
- B. Comply with NEMA VE 2 for cable tray and cable penetrations.
- C. Sleeves for Conduits Penetrating Above-Grade Non-Fire-Rated Concrete and Masonry-Unit Floors and Walls:
 1. Interior Penetrations of Non-Fire-Rated Walls and Floors:
 - a. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint.
 - b. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect material while curing.
 2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
 3. Size pipe sleeves to provide 6.4-mm (1/4-inch) annular clear space between sleeve and raceway or cable unless sleeve seal is to be installed or unless seismic criteria require different clearance.
 4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.
 5. Install sleeves for floor penetrations. Extend sleeves installed in floors 50 mm (2 inches) above finished floor level. Install sleeves during erection of floors.
- D. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies:
 1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
 2. Seal space outside of sleeves with approved joint compound for gypsum board assemblies.
- E. Roof-Penetration Sleeves: Seal penetration of individual raceways and cables with flexible boot-type flashing units applied in coordination with roofing work.
- F. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seals. Select sleeve size to allow for 25-mm (1-inch) annular clear space between pipe and sleeve for installing mechanical sleeve seals.
- G. Underground, Exterior-Wall and Floor Penetrations: Install cast-iron pipe sleeves. Size sleeves to allow for 25-mm (1-inch) annular clear space between raceway or cable and sleeve for installing sleeve-seal system.

3.02 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at raceway entries into building.
- B. Install type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

3.03 SLEEVE-SEAL-FITTING INSTALLATION

- A. Install sleeve-seal fittings in new walls and slabs as they are constructed.

HARDWARE RANCH VISITOR CENTER REFRESH

- B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.
- C. Secure nailing flanges to concrete forms.
- D. Using grout, seal the space around outside of sleeve-seal fittings.

END OF SECTION

SECTION 26 0548
VIBRATION AND SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS

GENERAL

1.01 SUMMARY

- A. This Section includes the following:
 - 1. Isolation pads.
 - 2. Spring isolators.
 - 3. Restrained spring isolators.
 - 4. Channel support systems.
 - 5. Restraint cables.
 - 6. Hanger rod stiffeners.
 - 7. Anchorage bushings and washers.

1.02 DEFINITIONS

- A. The IBC: International Building Code.

1.03 PERFORMANCE REQUIREMENTS

- A. Seismic-Restraint Loading:
 - 1. Site Class as Defined in the IBC: D.
 - 2. Assigned Seismic Use Group or Building Category as Defined in the IBC: III.
 - a. Component Importance Factor: 1.5.
 - b. Component Response Modification Factor:
 - 1) Fixture and Equipment: 2.5
 - 2) Conduit and Cables: 5.
 - c. Component Amplification Factor: 2.5.
 - 3. Design Spectral Response Acceleration at Short Periods (0.2 Second): 173%.
 - 4. Design Spectral Response Acceleration at 1.0-Second Period: 76%.

1.04 QUALITY ASSURANCE

- A. Comply with seismic-restraint requirements in the IBC unless requirements in this Section are more stringent.
- B. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- C. Seismic-restraint devices shall have horizontal and vertical load testing and analysis and shall bear anchorage preapproval OPA number from OSHPD, preapproval by ICC-ES, or preapproval by another agency acceptable to authorities having jurisdiction, showing maximum seismic-restraint ratings. Ratings based on independent testing are preferred to ratings based on calculations. If preapproved ratings are not available, submittals based on independent testing are preferred. Calculations (including combining shear and tensile loads) to support seismic-restraint designs must be signed and sealed by a qualified professional engineer.
- E. Comply with NFPA 70.

PRODUCTS

1.05 VIBRATION ISOLATORS

- A. Pads: Arrange in single or multiple layers of sufficient stiffness for uniform loading over pad area, molded with a nonslip pattern and galvanized-steel baseplates, and factory cut to sizes that match requirements of supported equipment.
 - 1. Resilient Material: Oil- and water-resistant hermetically sealed compressed fiberglass.

1.06 SEISMIC-RESTRAINT DEVICES

- A. General Requirements for Restraint Components: Rated strengths, features, and application requirements shall be as defined in reports by an agency acceptable to authorities having jurisdiction.
 - 1. Structural Safety Factor: Allowable strength in tension, shear, and pullout force of components shall be at least four times the maximum seismic forces to which they will be subjected.
- B. Channel Support System: MFMA-3, shop- or field-fabricated support assembly made of slotted steel channels with accessories for attachment to braced component at one end and to building structure at the other end and other matching components and with corrosion-resistant coating; and rated in tension, compression, and torsion forces.

HARDWARE RANCH VISITOR CENTER REFRESH

- C. Restraint Cables: ASTM A 603 galvanized or ASTM A 492 stainless-steel cables with end connections made of steel assemblies with thimbles, brackets, swivels, and bolts designed for restraining cable service; and with a minimum of two clamping bolts for cable engagement.
- D. Bushings for Floor-Mounted Equipment Anchor: Neoprene bushings designed for rigid equipment mountings, and matched to type and size of anchors and studs.
- E. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for rigid equipment mountings, and matched to type and size of attachment devices.
- F. Mechanical Anchor: Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchors with strength required for anchor and as tested according to ASTM E 488. Minimum length of eight times diameter.
- G. Adhesive Anchor: Drilled-in and capsule anchor system containing polyvinyl or urethane methacrylate-based resin and accelerator, or injected polymer or hybrid mortar adhesive. Provide anchor bolts and hardware with zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488.
- I. Finish: Manufacturer's standard paint applied to factory-assembled and -tested equipment before shipping.
 - 1. Powder coating on springs and housings.
 - 2. All hardware shall be galvanized. Hot-dip galvanize metal components for exterior use.
 - 3. Baked enamel or powder coat for metal components on isolators for interior use.
 - 4. Color-code or otherwise mark vibration isolation and seismic-control devices to indicate capacity range.

EXECUTION

1.07 APPLICATIONS

- A. Multiple Raceways or Cables: Secure raceways and cables to trapeze member with clamps approved for application by an agency acceptable to authorities having jurisdiction.
- B. Hanger Rod Stiffeners: Install hanger rod stiffeners where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to seismic forces.
- C. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static and seismic loads within specified loading limits.

1.08 SEISMIC-RESTRAINT DEVICE INSTALLATION

- A. Equipment and Hanger Restraints:
 - 1. Install restrained isolators on electrical equipment.
 - 2. Install resilient, bolt-isolation washers on equipment anchor bolts where clearance between anchor and adjacent surface exceeds 0.125 inch.
 - 3. Install seismic-restraint devices using methods approved by an agency acceptable to authorities having jurisdiction providing required submittals for component.
- B. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.
- C. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.
- D. Drilled-in Anchors:
 - 1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
 - 2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
 - 3. Install zinc-coated steel anchors for interior and stainless-steel anchors for exterior applications.

1.09 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

Install flexible connections in runs of raceways, cables, wireways, cable trays, and busways where they cross seismic joints, where adjacent sections or branches are supported by different structural elements, and where they terminate with connection to equipment that is anchored to a different structural element from the one supporting them as they approach equipment

END OF SECTION 26 0548

SECTION 26 0553

IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. Section Includes:
 - 1. Identification for raceways.
 - 2. Identification for conductors.
 - 3. Warning labels and signs.
 - 4. Instruction signs.
 - 5. Equipment identification labels.
 - 6. Miscellaneous identification products.

1.03 QUALITY ASSURANCE

- A. Comply with ANSI A13.1.
- B. Comply with NFPA 70.
- C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.
- D. Comply with ANSI Z535.4 for safety signs and labels.
- E. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

1.04 COORDINATION

- A. Coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual; and with those required by codes, standards, and 29 CFR 1910.145. Use consistent designations throughout Project.
- B. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- C. Coordinate installation of identifying devices with location of access panels and doors.
- D. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.01 POWER AND CONTROL RACEWAY IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway size.
- B. Colors for Raceways Carrying Circuits at 600 V or Less:
 - 1. Black letters on an orange field.
 - 2. Legend: Indicate voltage and system or service type.
- C. Colors for Raceways Carrying Circuits at More Than 600 V:
 - 1. Black letters on an orange field.
 - 2. Legend: "DANGER CONCEALED HIGH VOLTAGE WIRING."
- D. Vinyl Labels for Raceways Carrying Circuits at 600 V or Less: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- E. Snap-Around Labels for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.
- F. Snap-Around, Color-Coding Bands for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, solid-colored acrylic sleeve, 50 mm (2 inches) long, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.

HARDWARE RANCH VISITOR CENTER REFRESH

- G. Tape and Stencil for Raceways Carrying Circuits More Than 600 V: 100-mm- (4-inch-) wide black stripes on 250-mm (10-inch) centers diagonally over orange background that extends full length of raceway or duct and is 300 mm (12 inches) wide. Stop stripes at legends.
- H. Metal Tags: Brass or aluminum, 50 by 50 by 1.3 mm (2 by 2 by 0.05 inch), with stamped legend, punched for use with self-locking cable tie fastener.
- I. Write-On Tags: Polyester tag, 0.25 mm (0.010 inch) thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
 - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
 - 2. Marker for Tags: Machine-printed, permanent, waterproof, black ink marker recommended by printer manufacturer.

2.02 CONDUCTOR IDENTIFICATION MATERIALS

- A. Color-Coding Conductor Tape: Colored, self-adhesive vinyl tape not less than 0.08 mm (3 mils) thick by 25 to 50 mm (1 to 2 inches) wide.
- B. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around conductor it identifies. Full shrink recovery at a maximum of 93 deg C (200 deg F). Comply with UL 224.

2.03 WARNING LABELS AND SIGNS

- A. Comply with NFPA 70 and 29 CFR 1910.145.
- B. Self-Adhesive Warning Labels: Factory-printed, multicolor, pressure-sensitive adhesive labels, configured for display on front cover, door, or other access to equipment unless otherwise indicated.
- C. Baked-Enamel Warning Signs:
 - 1. Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application.
 - 2. 6.4-mm (1/4-inch) grommets in corners for mounting.
 - 3. Nominal size, 180 by 250 mm (7 by 10 inches).
- D. Metal-Backed, Butyrate Warning Signs:
 - 1. Weather-resistant, nonfading, preprinted, cellulose-acetate butyrate signs with 1-mm (0.0396-inch) galvanized-steel backing; and with colors, legend, and size required for application.
 - 2. 6.4-mm (1/4-inch) grommets in corners for mounting.
 - 3. Nominal size, 250 by 360 mm (10 by 14 inches).
- E. Warning label and sign shall include, but are not limited to, the following legends:
 - 1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
 - 2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 915 MM (36 INCHES)."
 - 3. Arc Flash Hazard Warning: Manufacturer standard indicating hazardous conditions when exposed.

2.04 INSTRUCTION SIGNS

- A. Engraved, laminated acrylic or melamine plastic, minimum 1.6 mm (1/16 inch) thick for signs up to 129 sq. cm (20 sq. inches) and 3.2 mm (1/8 inch) thick for larger sizes.
 - 1. Engraved legend with black letters on white face.
 - 2. Punched or drilled for mechanical fasteners.
 - 3. Framed with mitered acrylic molding and arranged for attachment at applicable equipment.

2.05 EQUIPMENT IDENTIFICATION LABELS

- A. Self-Adhesive, Engraved, Laminated Acrylic or Melamine Label: Adhesive backed, with white letters on a dark-gray background. Minimum letter height shall be 10 mm (3/8 inch).
- B. Engraved, Laminated Acrylic or Melamine Label: Punched or drilled for screw mounting. White letters on a dark-gray background. Minimum letter height shall be 10 mm (3/8 inch).

2.06 CABLE TIES

- A. General-Purpose Cable Ties: Fungus inert, self extinguishing, one piece, self locking, Type 6/6 nylon.
 - 1. Minimum Width: 5 mm (3/16 inch).
 - 2. Tensile Strength at 23 deg C (73 deg F), According to ASTM D 638: 82.7 MPa (12,000 psi).
 - 3. Temperature Range: Minus 40 to plus 85 deg C (Minus 40 to plus 185 deg F).
 - 4. Color: Black except where used for color-coding.
- B. UV-Stabilized Cable Ties: Fungus inert, designed for continuous exposure to exterior sunlight, self extinguishing, one piece, self locking, Type 6/6 nylon.

HARDWARE RANCH VISITOR CENTER REFRESH

1. Minimum Width: 5 mm (3/16 inch).
2. Tensile Strength at 23 deg C (73 deg F), According to ASTM D 638: 82.7 MPa (12,000 psi).
3. Temperature Range: Minus 40 to plus 85 deg C (Minus 40 to plus 185 deg F).
4. Color: Black.

2.07 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Select paint system applicable for surface material and location (exterior or interior).
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Verify identity of each item before installing identification products.
- B. Location: Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment.
- C. Apply identification devices to surfaces that require finish after completing finish work.
- D. Self-Adhesive Identification Products: Clean surfaces before application, using materials and methods recommended by manufacturer of identification device.
- E. Attach signs and plastic labels that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
- F. Attach plastic raceway and cable labels that are not self-adhesive type with clear vinyl tape with adhesive appropriate to the location and substrate.
- G. System Identification Color-Coding Bands for Raceways and Cables: Each color-coding band shall completely encircle cable or conduit. Place adjacent bands of two-color markings in contact, side by side. Locate bands at changes in direction, at penetrations of walls and floors, at 15-m (50-foot) maximum intervals in straight runs, and at 7.6-m (25-foot) maximum intervals in congested areas.
- H. Aluminum Wraparound Marker Labels and Metal Tags: Secure tight to surface of conductor or cable at a location with high visibility and accessibility.
- I. Cable Ties: For attaching tags. Use general-purpose type, except as listed below:
 1. Outdoors: UV-stabilized nylon.
 2. In Spaces Handling Environmental Air: Plenum rated.
- J. Underground-Line Warning Tape: During backfilling of trenches install continuous underground-line warning tape directly above line at 150 to 200 mm (6 to 8 inches) below finished grade. Use multiple tapes where width of multiple lines installed in a common trench or concrete envelope exceeds 400 mm (16 inches) overall.
- K. Painted Identification: Comply with requirements in painting Sections for surface preparation and paint application.

3.02 IDENTIFICATION SCHEDULE

- A. Accessible Raceways and Metal-Clad Cables, 600 V or Less, for Feeders from an external source More Than 30 A, and 120 V to ground: Identify with self-adhesive vinyl label. Install labels at 3-m (10-foot) maximum intervals.
- B. Accessible Raceways and Cables within Buildings: Identify the covers of each junction and pull box of the following systems with self-adhesive vinyl labels with the wiring system legend and system voltage. System legends shall be as follows:
 1. Emergency Power.
- C. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use color-coding conductor tape to identify the phase.
 1. Color-Coding for Phase and Voltage Level Identification, 600 V or Less: Use colors listed below for ungrounded feeder and branch-circuit conductors.
 - a. Color shall be factory applied or field applied for sizes larger than No. 8 AWG, if authorities having jurisdiction permit.
 - b. Colors for 240/120-V Circuits (verify with existing facility prior to ordering wire):
 - 1) Phase A: Black.
 - 2) Phase B: Red.
 - 3) Neutral: White with colored stripe matching associated phase color
 - 4) Ground: Green

HARDWARE RANCH VISITOR CENTER REFRESH

- c. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 150 mm (6 inches) from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Locate bands to avoid obscuring factory cable markings.
- D. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, manholes, and handholes, use write-on tags or self-adhesive vinyl labels with the conductor or cable designation, origin, and destination.
- E. Control-Circuit Conductor Termination Identification: For identification at terminations provide self-adhesive vinyl labels with the conductor designation.
- F. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, and signal connections.
 - 1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.
 - 2. Use system of marker tape designations that is uniform and consistent with system used by manufacturer for factory-installed connections.
 - 3. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual.
- G. Locations of Underground Lines: Identify with underground-line warning tape for power, lighting, communication, and control wiring and optical fiber cable.
 - 1. Install underground-line warning tape for both direct-buried cables and cables in raceway.
- H. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive warning labels.
 - 1. Comply with 29 CFR 1910.145.
 - 2. Identify system voltage with black letters on an orange background.
 - 3. Apply to exterior of door, cover, or other access.
 - 4. For equipment with multiple power or control sources, apply to door or cover of equipment including, but not limited to, the following:
 - a. Power transfer switches.
 - b. Controls with external control power connections.
- I. Operating Instruction Signs: Install instruction signs to facilitate proper operation and maintenance of electrical systems and items to which they connect. Install instruction signs with approved legend where instructions are needed for system or equipment operation.
- J. Emergency Operating Instruction Signs: Install instruction signs with white legend on a red background with minimum 10-mm- (3/8-inch-) high letters for emergency instructions at equipment used for power transfer.
- K. Equipment Identification Labels: On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and the Operation and Maintenance Manual. Apply labels to disconnect switches and protection equipment, central or master units, control panels, control stations, terminal cabinets, and racks of each system. Systems include power, lighting, control, communication, signal, monitoring, and alarm systems unless equipment is provided with its own identification.
 - 1. Labeling Instructions:
 - a. Indoor Equipment: Self-adhesive, engraved, laminated acrylic or melamine label. Unless otherwise indicated, provide a single line of text with 13-mm- (1/2-inch-) high letters on 38-mm- (1-1/2-inch-) high label; where two lines of text are required, use labels 50 mm (2 inches) high.
 - b. Outdoor Equipment: Engraved, laminated acrylic or melamine label.
 - c. Elevated Components: Increase sizes of labels and letters to those appropriate for viewing from the floor.
 - d. Unless provided with self-adhesive means of attachment, fasten labels with appropriate mechanical fasteners that do not change the NEMA or NRTL rating of the enclosure.
 - 2. Equipment to Be Labeled:
 - a. Panelboards: Typewritten directory of circuits in the location provided by panelboard manufacturer. Panelboard identification shall be self-adhesive, engraved, laminated acrylic or melamine label.
 - b. Enclosures and electrical cabinets.
 - c. Access doors and panels for concealed electrical items.
 - d. Transformers: Label that includes tag designation shown on Drawings for the transformer, feeder, and panelboards or equipment supplied by the secondary.
 - e. Emergency system boxes and enclosures.
 - f. Enclosed switches.
 - g. Enclosed circuit breakers.
 - h. Push-button stations.
 - i. Power transfer equipment.
 - j. Contactors.
 - k. Remote-controlled switches, dimmer modules, and control devices.
 - l. Power-generating units.

HARDWARE RANCH VISITOR CENTER REFRESH

- m. Access control gateways and head-end equipment

END OF SECTION

**SECTION 26 2726
WIRING DEVICES**

GENERAL

1.01 SUMMARY

- A. Section Includes:
 - 1. Receptacles, receptacles with integral GFCI, and associated device plates.
 - 2. Tamper-resistant receptacles.
 - 3. Weather-resistant receptacles.
 - 4. Wall-switch and exterior occupancy sensors.

1.02 DEFINITIONS

- A. EMI: Electromagnetic interference.
- B. GFCI: Ground-fault circuit interrupter.
- C. Pigtail: Short lead used to connect a device to a branch-circuit conductor.
- D. RFI: Radio-frequency interference.
- E. TVSS: Transient voltage surge suppressor.
- F. UTP: Unshielded twisted pair.

1.03 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Receptacles for Owner-Furnished Equipment: Match plug configurations.
 - 2. Cord and Plug Sets: Match equipment requirements.

PRODUCTS

1.04 GENERAL WIRING-DEVICE REQUIREMENTS

- A. Wiring Devices, Components, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70.
- C. Devices that are manufactured for use with modular plug-in connectors may be substituted under the following conditions:
 - 1. Connectors shall comply with UL 2459 and shall be made with stranding building wire.
 - 2. Devices shall comply with the requirements in this Section.

1.05 STRAIGHT-BLADE RECEPTACLES

- A. Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498, and FS W-C-596.
- B. Tamper-Resistant Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498 Supplement sd, and FS W-C-596.

1.06 GFCI RECEPTACLES

- A. General Description:
 - 1. Straight blade, feed-through type.
 - 2. Comply with NEMA WD 1, NEMA WD 6, UL 498, UL 943 Class A, and FS W-C-596.
 - 3. Include indicator light that shows when the GFCI has malfunctioned and no longer provides proper GFCI protection.
- B. Duplex GFCI Convenience Receptacles, 125 V, 20 A:
- C. Tamper-Resistant GFCI Convenience Receptacles, 125 V, 20 A:

1.07 TOGGLE SWITCHES

- A. Comply with NEMA WD 1, UL 20, and FS W-S-896.
- B. Switches, 120/277 V, 20 A:
- C. Pilot-Light Switches, 20 A:
 - 1. Description: Single pole, with neon-lighted handle, illuminated when switch is "off."

HARDWARE RANCH VISITOR CENTER REFRESH

1.08 WALL PLATES

- A. Single and combination types shall match corresponding wiring devices.
 - 1. Plate-Securing Screws: Metal with head color to match plate finish.
 - 2. Material for Finished Spaces: Smooth, high-impact thermoplastic.
 - 3. Material for Unfinished Spaces: Galvanized steel.
 - 4. Material for Damp Locations: Thermoplastic with spring-loaded lift cover, and listed and labeled for use in wet and damp locations.
- B. Wet-Location, Weatherproof Cover Plates: NEMA 250, complying with Type 3R, weather-resistant, die-cast aluminum with lockable cover.
- C. Wet location, Weather-proof-in-use: Arlington In-Box Series

1.09 FINISHES

- A. Device Color:
 - 1. Wiring Devices Connected to Normal Power System: White unless otherwise indicated or required by NFPA 70 or device listing.
- B. Wall Plate Color: For plastic covers, match device color.

EXECUTION

1.10 INSTALLATION

- A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.
- B. Identify each receptacle with panelboard identification and circuit number. Use hot, stamped, or engraved machine printing with black-filled lettering on face of plate, and durable wire markers or tags inside outlet boxes.

END OF SECTION 26 0544

**SECTION 26 2816
ENCLOSED SWITCHES AND CIRCUIT BREAKERS**

GENERAL

1.01 SUMMARY

- A. Section Includes:
 - 1. Non-fusible switches.
 - 2. Fusible switches.

1.02 DEFINITIONS

- A. NC: Normally closed.
- B. NO: Normally open.
- C. SPDT: Single pole, double throw.

1.03 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70.

1.04 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.

1.05 WARRANTY

- A. Manufacturer's Warranty: Manufacturer and Installer agree to repair or replace components that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: One year from date of Substantial Completion.

1.06 ACTION SUBMITTALS

- A. Product Data: For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include nameplate ratings, dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.
 - 1. Enclosure types and details for types other than NEMA 250, Type 1.

PRODUCTS

1.07 FUSIBLE SWITCHES

- A. Type HD, Heavy Duty:
 - 1. Single throw.
 - 2. Three pole.
 - 3. 600-V ac.

HARDWARE RANCH VISITOR CENTER REFRESH

4. 200 A and smaller.
 5. UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate indicated fuses.
 6. Lockable handle with capability to accept two padlocks, and interlocked with cover in closed position.
- B. Accessories:
1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
 2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
 3. Lugs: suitable for number, size, and conductor material.

1.08 NONFUSIBLE SWITCHES

- A. Type GD, General Duty, Single Throw, 600 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept two padlocks, and interlocked with cover in closed position.
- B. Accessories:
1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
 2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
 3. Lugs: suitable for number, size, and conductor material.

EXECUTION

1.09 INSTALLATION

- A. Install individual wall-mounted switches and circuit breakers with tops at uniform height unless otherwise indicated.
- B. Comply with mounting and anchoring requirements specified in Section 26 0548.16 "Seismic Controls for Electrical Systems."
- C. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.
- D. Comply with NECA 1.

1.10 IDENTIFICATION

- A. Comply with requirements in Section 26 0553 "Identification for Electrical Systems."

END OF SECTION 26 2816

SECTION 26 5100

INTERIOR LIGHTING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. Section Includes:
 - 1. Interior lighting fixtures, lamps, and ballasts.
 - 2. Exit signs.
 - 3. Lighting fixture supports.
- B. Related Sections:
 - 1. Section 26 0923 "Lighting Control Devices" for automatic control of lighting, including time switches, photoelectric relays, occupancy sensors, and multipole lighting relays and contactors.
 - 2. Section 26 2726 "Wiring Devices" for manual wall-box dimmers.

1.03 DEFINITIONS

- A. BF: Ballast factor.
- B. CCT: Correlated color temperature.
- C. CRI: Color-rendering index.
- D. HID: High-intensity discharge.
- E. LER: Luminaire efficacy rating.
- F. Lumen: Measured output of lamp and luminaire, or both.
- G. Luminaire: Complete lighting fixture, including ballast housing if provided.

1.04 ACTION SUBMITTALS

- A. Product Data: For each type of lighting fixture, arranged in order of fixture designation. Include data on features, accessories, finishes, and the following:
 - 1. Physical description of lighting fixture including dimensions.
 - 2. Emergency lighting units including battery and charger.
 - 3. Ballast, including BF.
 - 4. Energy-efficiency data.
 - 5. Air and Thermal Performance Data: For air-handling lighting fixtures. Furnish data required in "Action Submittals" Article in Section 23 3713 "Diffusers, Registers, and Grilles."
 - 6. Sound Performance Data: For air-handling lighting fixtures. Indicate sound power level and sound transmission class in test reports certified according to standards specified in Section 23 3713 "Diffusers, Registers, and Grilles."
 - 7. Life, output (lumens, CCT, and CRI), and energy-efficiency data for lamps.
 - 8. Photometric data and adjustment factors based on laboratory tests, complying with IESNA Lighting Measurements Testing & Calculation Guides, of each lighting fixture type. The adjustment factors shall be for lamps, ballasts, and accessories identical to those indicated for the lighting fixture as applied in this Project.
 - a. Manufacturer Certified Data: Photometric data shall be certified by a manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
- B. Shop Drawings: For nonstandard or custom lighting fixtures. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 2. Wiring Diagrams: For power, signal, and control wiring.
- C. Installation instructions.

1.05 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified agencies providing photometric data for lighting fixtures.

HARDWARE RANCH VISITOR CENTER REFRESH

- B. Product Certificates: For each type of ballast for bi-level and dimmer-controlled fixtures, from manufacturer.
- C. Field quality-control reports.

1.06 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For lighting equipment and fixtures to include in emergency, operation, and maintenance manuals.
 - 1. Provide a list of all lamp types used on Project; use ANSI and manufacturers' codes.

1.07 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Lamps: 10 for every 100 of each type and rating installed. Furnish at least one of each type.
 - 2. Plastic Diffusers and Lenses: One for every 100 of each type and rating installed. Furnish at least one of each type.
 - 3. Ballasts: One for every 100 of each type and rating installed. Furnish at least one of each type.

1.08 QUALITY ASSURANCE

- A. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by manufacturers' laboratories that are accredited under the National Volunteer Laboratory Accreditation Program for Energy Efficient Lighting Products.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Comply with NFPA 70.

1.09 COORDINATION

- A. Coordinate layout and installation of lighting fixtures and suspension system with other construction that penetrates ceilings or is supported by them, including HVAC equipment, fire-suppression system, and partition assemblies.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide product indicated on Drawings.

2.02 GENERAL REQUIREMENTS FOR LIGHTING FIXTURES AND COMPONENTS

- A. Recessed Fixtures: Comply with NEMA LE 4 for ceiling compatibility for recessed fixtures.
- B. Fluorescent Fixtures: Comply with UL 1598. Where LER is specified, test according to NEMA LE 5 and NEMA LE 5A as applicable.
- C. HID Fixtures: Comply with UL 1598. Where LER is specified, test according to NEMA LE 5B.
- D. LED Fixtures: Comply with UL 1598. Where LER is specified, test according to NEMA LE5 and NEMA LE5A as applicable.
- E. Metal Parts: Free of burrs and sharp corners and edges.
- F. Sheet Metal Components: Steel unless otherwise indicated. Form and support to prevent warping and sagging.
- G. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to
- H. prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.
- I. Diffusers and Globes:
 - 1. Acrylic Lighting Diffusers: 100 percent virgin acrylic plastic. High resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
 - a. Lens Thickness: At least 3.175 mm (0.125 inch) minimum unless otherwise indicated.
 - b. UV stabilized.
 - 2. Glass: Annealed crystal glass unless otherwise indicated.
- J. Factory-Applied Labels: Comply with UL 1598. Include recommended lamps and ballasts. Labels shall be located where they will be readily visible to service personnel, but not seen from normal viewing angles when lamps are in place.
 - 1. Label shall include the following lamp and ballast characteristics:
 - a. "USE ONLY" and include specific lamp type.
 - b. Lamp diameter code (T-4, T-5, T-8, T-12, etc.), tube configuration (twin, quad, triple, etc.), base type, and nominal wattage for fluorescent and compact fluorescent luminaires.
 - c. Lamp type, wattage, bulb type (ED17, BD56, etc.) and coating (clear or coated) for HID luminaires.
 - d. Start type (preheat, rapid start, instant start, etc.) for fluorescent and compact fluorescent luminaires.

HARDWARE RANCH VISITOR CENTER REFRESH

- e. ANSI ballast type (M98, M57, etc.) for HID luminaires.
- f. CCT and CRI for all luminaires.

2.03 BALLASTS FOR LINEAR FLUORESCENT LAMPS

- A. General Requirements for Electronic Ballasts:
 - 1. Comply with UL 935 and with ANSI C82.11.
 - 2. Designed for type and quantity of lamps served.
 - 3. Ballasts shall be designed for full light output unless another BF, dimmer, or bi-level control is indicated.
 - 4. Sound Rating: Class A.
 - 5. Total Harmonic Distortion Rating: Less than 10 percent.
 - 6. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 - 7. Operating Frequency: 42 kHz or higher.
 - 8. Lamp Current Crest Factor: 1.7 or less.
 - 9. BF: 0.88 or higher.
 - 10. Power Factor: 0.98 or higher.
 - 11. Parallel Lamp Circuits: Multiple lamp ballasts shall comply with ANSI C82.11 and shall be connected to maintain full light output on surviving lamps if one or more lamps fail.
- B. luminaires controlled by occupancy sensors shall have programmed-start ballasts.
- C. Electronic Programmed-Start Ballasts for T8 Lamps: Comply with ANSI C82.11 and the following:
 - 1. Lamp end-of-life detection and shutdown circuit for T5 diameter lamps.
 - 2. Automatic lamp starting after lamp replacement.
- D. Ballasts for Dimmer-Controlled Lighting Fixtures: Electronic type.
 - 1. Dimming Range: 100 to 5 percent of rated lamp lumens.
 - 2. Ballast Input Watts: Can be reduced to 20 percent of normal.
 - 3. Compatibility: Certified by manufacturer for use with specific dimming control system and lamp type indicated.
 - 4. Control: Coordinate wiring from ballast to control device to ensure that the ballast, controller, and connecting wiring are compatible.

2.04 BALLASTS FOR COMPACT FLUORESCENT LAMPS

- A. Description: Electronic-programmed rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated:
 - 1. Lamp end-of-life detection and shutdown circuit.
 - 2. Automatic lamp starting after lamp replacement.
 - 3. Sound Rating: Class A.
 - 4. Total Harmonic Distortion Rating: Less than 20 percent.
 - 5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 - 6. Operating Frequency: 20 kHz or higher.
 - 7. Lamp Current Crest Factor: 1.7 or less.
 - 8. BF: 0.95 or higher unless otherwise indicated.
 - 9. Power Factor: 0.98 or higher.
 - 10. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for nonconsumer equipment.

2.05 LED LUMINAIRES

- A. Solid State Drivers and LED: Comply with DOE LM 79
 - 1. Total Harmonic Distortion Rating: Less than 10 percent
 - 2. Transient Voltage protection
 - 3. Power factor: 0.90 or higher
 - 4. Temperatures: Minus 40 deg F (minus 40 deg C) and higher
 - 5. Heat sink to remove heat from circuits
 - 6. L70 compliant to 70,000 hours minimum
 - 7. Dimmable
 - a. Dimming Range: 100 to 1 percent of rated lamp lumens
 - b. Input watts: Can be reduced to 20 percent of normal
 - c. Compatibility: Certified by manufacturer for use with specific dimming control system and lamp type indicated.

2.06 BALLASTS FOR HID LAMPS

- A. Electronic Ballast for Metal-Halide Lamps: Include the following features unless otherwise indicated:

HARDWARE RANCH VISITOR CENTER REFRESH

1. Minimum Starting Temperature: Minus 29 deg C (Minus 20 deg F) for single-lamp ballasts.
2. Rated Ambient Operating Temperature: 54 deg C (130 deg F).
3. Lamp end-of-life detection and shutdown circuit.
4. Sound Rating: Class A.
5. Total Harmonic Distortion Rating: Less than 20 percent.
6. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
7. Lamp Current Crest Factor: 1.5 or less.
8. Power Factor: 0.90 or higher.
9. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for nonconsumer equipment.
10. Protection: Class P thermal cutout.

2.07 QUARTZ LAMP LIGHTING CONTROLLER

- A. General Requirements for Controllers: Factory installed by lighting fixture manufacturer. Comply with UL 1598.
- B. Standby (Quartz Restrike): Automatically switches quartz lamp on when a HID lamp in the fixture is initially energized and during the HID lamp restrike period after brief power outages.
- C. Connections: Designed for a single branch -circuit connection.
- D. Switching Off: Automatically switches quartz lamp off when HID lamp strikes.
- E. Switching Off: Automatically switches quartz lamp off when HID lamp reaches approximately 60 percent light output.

2.08 EXIT SIGNS

- A. General Requirements for Exit Signs: Comply with UL 924; for sign colors, visibility, luminance, and lettering size, comply with authorities having jurisdiction.
- B. Internally Lighted Signs:
 1. Lamps for AC Operation: LEDs, 50,000 hours minimum rated lamp life.

2.09 FLUORESCENT LAMPS

- A. T8 rapid-start lamps, rated 32 W maximum, CRI 85 (minimum), color temperature 4100 K, and average rated life 20,000 hours unless otherwise indicated.
- B. Compact Fluorescent Lamps: 4-Pin, CRI 80 (minimum), color temperature 3500 K, average rated life of 10,000 hours at three hours operation per start unless otherwise indicated.

2.10 HID LAMPS

- A. Metal-Halide Lamps: ANSI C78.43, with minimum CRI 65, and color temperature 4000 K.
- B. Pulse-Start, Metal-Halide Lamps: Minimum CRI 65, and color temperature 4000 K.

2.11 LIGHTING FIXTURE SUPPORT COMPONENTS

- A. Comply with Section 26 0529 "Hangers and Supports for Electrical Systems" for channel- and angle-iron supports and nonmetallic channel and angle supports.
- B. Wires: ASTM A 641/A 641M, Class 3, soft temper, zinc-coated steel, 2.68 mm (12 gage).
- C. Wires for Humid Spaces: ASTM A 580/A 580M, Composition 302 or 304, annealed stainless steel, 2.68 mm (12 gage).

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Lighting fixtures:
 1. Set level, plumb, and square with ceilings and walls unless otherwise indicated.
 2. Install lamps in each luminaire.
- B. Temporary Lighting: If it is necessary, and approved by Architect, to use permanent luminaires for temporary lighting, install and energize the minimum number of luminaires necessary. When construction is sufficiently complete, remove the temporary luminaires, disassemble, clean thoroughly, install new lamps, and reinstall.
- C. Remote Mounting of Ballasts: Distance between the ballast and fixture shall not exceed that recommended by ballast manufacturer. Verify, with ballast manufacturers, maximum distance between ballast and luminaire.
- D. Lay-in Ceiling Lighting Fixtures Supports: Use grid as a support element.
 1. Install ceiling support system rods or wires, independent of the ceiling suspension devices, for each fixture. Locate not more than 150 mm (6 inches) from lighting fixture corners.

HARDWARE RANCH VISITOR CENTER REFRESH

2. Support Clips: Fasten to lighting fixtures and to ceiling grid members at or near each fixture corner with clips that are UL listed for the application.
 3. Fixtures of Sizes Less Than Ceiling Grid: Install as indicated on reflected ceiling plans or center in acoustical panel, and support fixtures independently with at least two 20-mm (3/4-inch) metal channels spanning and secured to ceiling tees.
 4. Install at least one independent support rod or wire from structure to a tab on lighting fixture. Wire or rod shall have breaking strength of the weight of fixture at a safety factor of 3.
- E. Suspended Lighting Fixture Support:
1. Pendants and Rods: Where longer than 1200 mm (48 inches), brace to limit swinging.
 2. Stem-Mounted, Single-Unit Fixtures: Suspend with twin-stem hangers.
 3. Continuous Rows: Use tubing or stem for wiring at one point and tubing or rod for suspension for each unit length of fixture chassis, including one at each end.
 4. Do not use grid as support for pendant luminaires. Connect support wires or rods to building structure.
- F. Connect wiring according to Section 26 0519 "Low-Voltage Electrical Power Conductors and Cables."

3.02 IDENTIFICATION

- A. Install labels with panel and circuit numbers on concealed junction and outlet boxes. Comply with requirements for identification specified in Section 26 0553 "Identification for Electrical Systems."

3.03 FIELD QUALITY CONTROL

- A. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery and retransfer to normal.

3.04 STARTUP SERVICE

- A. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Owner. Burn-in fluorescent and compact fluorescent lamps intended to be dimmed, for at least 100 hours at full voltage.

3.05 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting aimable luminaires to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose. Some of this work may be required after dark.
1. Adjust aimable luminaires in the presence of Architect.

END OF SECTION 26 5100

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase)



PROJECT: _____ SUBSTITUTION REQUEST NUMBER: _____

FROM: _____

TO: _____ DATE: _____

A/E PROJECT NUMBER: _____

RE: _____ CONTRACT FOR: _____

SPECIFICATION TITLE: _____ DESCRIPTION: _____

SECTION: _____ PAGE: _____ ARTICLE/PARAGRAPH: _____

PROPOSED SUBSTITUTION: _____

MANUFACTURER: _____ ADDRESS: _____ PHONE: _____

TRADE NAME: _____ MODEL NO.: _____

INSTALLER: _____ ADDRESS: _____ PHONE: _____

HISTORY: ☐ New Product ☐ 1-4 years old ☐ 5-10 years old ☐ More than 10 years old

DIFFERENCES BETWEEN PROPOSED SUBSTITUTION AND SPECIFIED PRODUCT: _____

☐ Point-by-point comparative data attached — REQUIRED BY A/E

REASON FOR NOT PROVIDING SPECIFIED ITEM: _____

SIMILAR INSTALLATION:

PROJECT: _____ ARCHITECT: _____

ADDRESS: _____ OWNER: _____

DATE INSTALLED: _____

PROPOSED SUBSTITUTION AFFECTS OTHER PARTS OF WORK: ☐ No ☐ Yes; explain _____

SAVINGS TO OWNER FOR ACCEPTING SUBSTITUTION:

PROPOSED SUBSTITUTION CHANGES CONTRACT TIME: ☐ No ☐ Yes [Add] [Deduct] _____ days.

SUPPORTING DATA ATTACHED: ☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports ☐ _____

CONTINUE ON NEXT PAGE

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase—Continued)



The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
- Same warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent are to be waived.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all respects.

SUBMITTED BY: _____

SIGNED BY: _____

FIRM: _____

ADDRESS: _____

TELEPHONE: _____

☐ **Attachments**

A/E's REVIEW AND RECOMMENDATION:

- ☐ Approve Substitution—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Approve Substitution as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Reject Substitution—Use specified materials.
- ☐ Substitution Request received too late—Use specified materials.

SIGNED BY: _____

DATE: _____

OWNER'S REVIEW AND ACTION:

- ☐ Substitution approved—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order
- ☐ Substitution approved as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order.
- ☐ Substitution rejected—Use specified materials.

SIGNED BY: _____

DATE: _____

ADDITIONAL COMMENTS:

☐

Contractor

☐

Subcontractor

☐

Supplier

☐

Manufacturer

☐

A/E

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase)



PROJECT: _____ SUBSTITUTION
REQUEST NUMBER: _____

FROM: _____

TO: _____ DATE: _____

A/E PROJECT NUMBER: _____

RE: _____ CONTRACT FOR: _____

SPECIFICATION TITLE: _____ DESCRIPTION: _____

SECTION: _____ PAGE: _____ ARTICLE/PARAGRAPH: _____

PROPOSED SUBSTITUTION: _____

MANUFACTURER: _____ ADDRESS: _____ PHONE: _____

TRADE NAME: _____ MODEL NO.: _____

INSTALLER: _____ ADDRESS: _____ PHONE: _____

HISTORY: ☐ New Product ☐ 1-4 years old ☐ 5-10 years old ☐ More than 10 years old

DIFFERENCES BETWEEN PROPOSED SUBSTITUTION AND SPECIFIED PRODUCT: _____

☐ Point-by-point comparative data attached — REQUIRED BY A/E

REASON FOR NOT PROVIDING SPECIFIED ITEM: _____

SIMILAR INSTALLATION:

PROJECT: _____ ARCHITECT: _____

ADDRESS: _____ OWNER: _____

DATE INSTALLED: _____

PROPOSED SUBSTITUTION AFFECTS OTHER PARTS OF WORK: ☐ No ☐ Yes; explain _____

SAVINGS TO OWNER FOR ACCEPTING SUBSTITUTION:

PROPOSED SUBSTITUTION CHANGES CONTRACT TIME: ☐ No ☐ Yes [Add] [Deduct] _____ days.

SUPPORTING DATA ATTACHED: ☐ Drawings ☐ Product Data ☐ Samples ☐ Tests ☐ Reports ☐ _____

CONTINUE ON NEXT PAGE

SUBSTITUTION REQUEST

(After the Bidding/Negotiating Phase—Continued)



The Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product.
- Same warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source of replacement parts, as applicable, is available.
- Proposed substitution will have no adverse effect on other trades and will not affect or delay progress schedule.
- Cost data as stated above is complete. Claims for additional costs related to accepted substitution which may subsequently become apparent are to be waived.
- Proposed substitution does not affect dimensions and functional clearances.
- Payment will be made for changes to building design, including A/E design, detailing, and construction costs caused by the substitution.
- Coordination, installation, and changes in the Work as necessary for accepted substitution will be complete in all respects.

SUBMITTED BY: _____
SIGNED BY: _____
FIRM: _____
ADDRESS: _____
TELEPHONE: _____
☐ Attachments

A/E's REVIEW AND RECOMMENDATION:

- ☐ Approve Substitution—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Approve Substitution as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures.
- ☐ Reject Substitution—Use specified materials.
- ☐ Substitution Request received too late—Use specified materials.

SIGNED BY:

DATE:

OWNER'S REVIEW AND ACTION:

- ☐ Substitution approved—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order
- ☐ Substitution approved as noted—Make submittals in accordance with Specification Section 01 33 00 Submittal Procedures. Prepare Change Order.
- ☐ Substitution rejected—Use specified materials.

SIGNED BY:

DATE:

ADDITIONAL COMMENTS: ☐ Contractor ☐ Subcontractor ☐ Supplier ☐ Manufacturer ☐ A/E