Addendum 1

November 4, 2026

1. **BID SCHEDULE-ADDENDUM #1**
    a. BID SCHEDULE is replaced with BID SCHEDULE- ADDENDUM #1 below
        i. Updates Bid Item #9- 24-inch Slide Gate with Extension(s)
            1. Unit - EACH
            2. Quantity - 1


BID SCHEDULE- ADDENDUM #1

Item	Description	Unit	Quantity	Unit Price	Item Price
1	Mobilization	Lump Sum	1		
2	Survey	Lump Sum	1		
3	Storm Water Pollution Prevention Plan (SWPPP)	Lump Sum	1		
4	Demolition, Removal, Excavation/Site Fill, Grading, and Preparation	Lump Sum	1		
5	3x3 Junction Box	Each	11		
6	5x5 Junction Box	Each	2		
7	24-inch Waterman Wheel Gate	Each	3		
8	12-inch Slide Gate with Extension(s)	Each	5		
9	24-inch Slide Gate with Extension(s)	**Each**	**1**		
10	Weir Wall at Junction Box	Each	2		
11	Galvanized Steel Weir Plate	Each	1		
12	24-inch Piping	Lineal Foot	2865		
13	15-inch Piping	Lineal Foot	466		
14	12-inch Piping	Lineal Foot	135		
15	10-inch Piping	Lineal Foot	76		
16	10-inch 90* Bend	Each	2		
17	24-inch Flared End with Trash Grate	Each	3		
18	Connect Pipe to Existing Box	Each	3		
19	Landscaping and Irrigation	Lump Sum	1		

2. MEASUREMENT AND PAYMENT
    a. Replace Measurement and Payment Item #9 with the following:

9. 24-INCH SLIDE GATE
    1. Measurement made by each.
    2. Bid price covers cost of work and material in installing slide gate for **24-inch** pipe opening similar to Waterman Industries Model C-8 Slide Ditch Gate or approved equal attached to inside wall of junction box or structure.
    3. Bid price includes materials and labor to install frame, handles, extensions, hardware, modifications, and appurtenances necessary to operate slide gate without removal of the grate.

3. C200-
    a. Remove and Replace sheet C200- modifies General Note #4 as follows
        4. INSTALL STORMWATER STRUCTURES PER APWA PLAN No. 332 AS AMENDED BY NIBLEY CITY

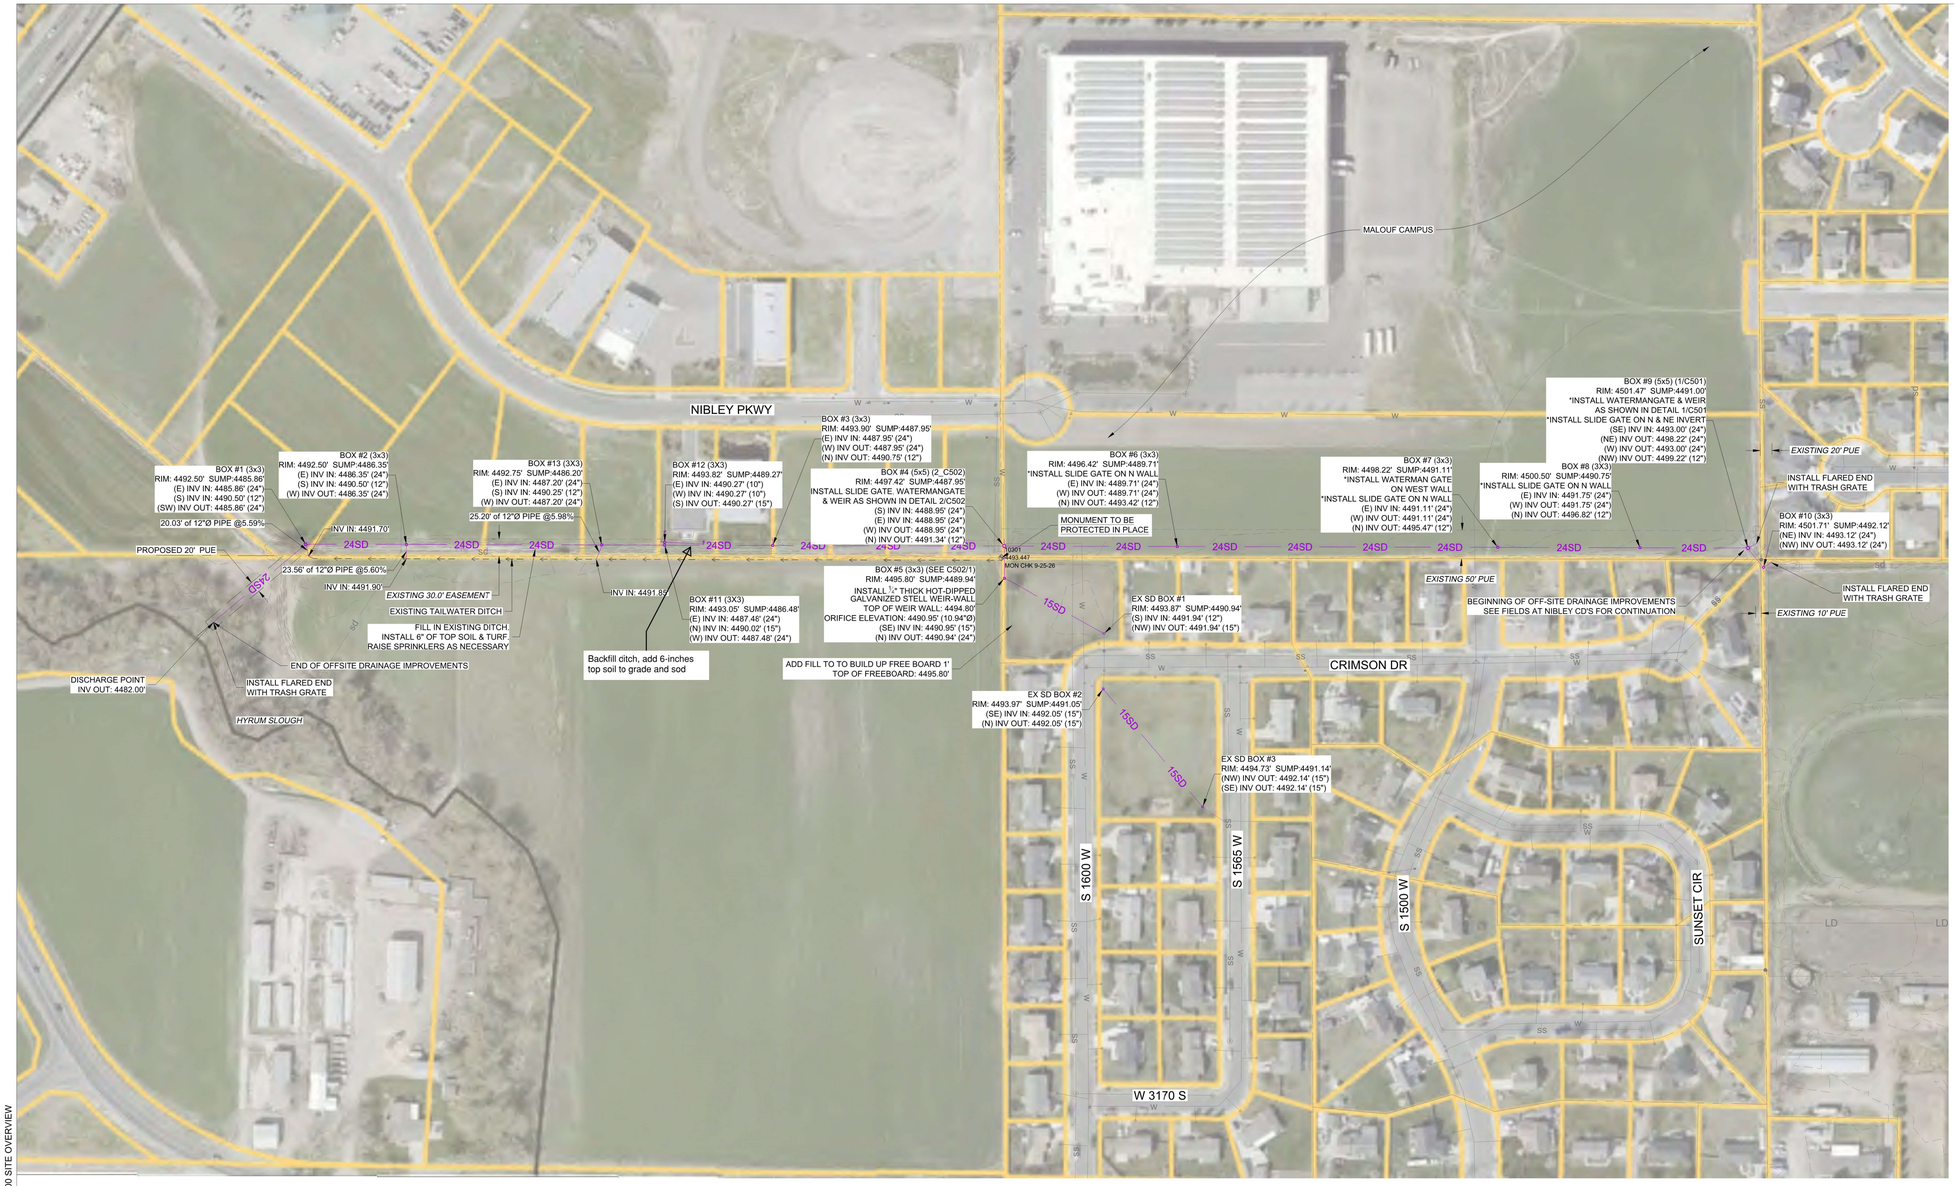

GENERAL NOTES:

1. ALL STORM DRAIN PIPES TO BE DUAL-WALL CORRUGATED HDPE.
2. ALL OPEN-ENDED PIPES TO BE INSTALLED WITH FLARED-END SECTION AND TRASH GUARD.
3. INSTALL PIPES IN TRENCH PER DETAIL 3/C501
4. **INSTALL STORMWATER STRUCTURES PER APWA PLAN No. 332 AS AMENDED BY NIBLEY CITY** (#1)
5. CONTRACTOR TO REPAIR LANDSCAPING SPRINKLERS AT PONDS
6. ALL CONTROL STRUCTURES SHOULD BE ABLE TO BE OPERATED FROM GROUND ELEVATION WITH NO REMOVAL OF GRATE NECESSARY

N

0 125 250 Feet

civilsolutionsgroup inc.
CACHE VALLEY | P: 435.213.3762
SALT LAKE | P: 801.216.3192
UTAH VALLEY | P: 801.874.1432
info@civilsolutionsgroup.net
www.civilsolutionsgroup.net

NIBLEY CITY REGIONAL DRAIN LINE
3200 SOUTH & 1350 WEST
NIBLEY, UT 84321

MARK:	DATE:	DESCRIPTION:
#1	11/4/26	Addendum #1- Issued by Owner

PROJECT #: 26-207
DRAWN BY: A. LANGE
PROJECT MANAGER: C. SCHAFFNER
ISSUED: 11/3/2026

PROFESSIONAL ENGINEER
11/3/2026
No.14218217-2202
CLAY M. SCHAFFNER
STATE OF UTAH

SITE OVERVIEW

C200

P:\2026\26-207 nibley city drain line\Civil\AutoCAD\sheet set\2 construction drawings\regional drain line\C200 SITE OVERVIEW